

# Eclipse Midi



## Specification

### Material

The chassis and drop down plate are die cast aluminium LM6 and the canopy spun aluminium. The glazing toughened glass.

### Ingress Protection

IP 66 Optical Compartment , IP 44 Gear Compartment

### Finishes

The Aluminium body drop down plate and canopy are treated with a chromate and then Polyester Powder Coated Sable Gris ( RAL 2900 ) as standard. Can be painted any BS or RAL colour as requested.

### Optics

Can be fitted with the Candela the Candela EV range of street optics. LED's are fitted with variety of street optical lenses

### Gear

Sodium and CDMT-T	150w
CDMT	150w
Metal Halide	150w
Compact Fluorescent	70w
Cosmopolis	140w

**LED Aray** 24w - 84w

### Fixings & Mountings

All fixings are Stainless Steel

This fitting is side entry mounting to suit 60 mm and is suitable with our range of wall and post top brackets for all size columns  
Mounting is via M10 Stainless Grub Screws

### Recommended Height

4mtr - 10 mtr

### Maintenance

No tooling required. Releasing the toggle clamps allows the bowl and brim assembly hinge down gaining access to the gear and lamp. Lamp change is via our ¼ turn lamp holder and gear withdraws for maintenance.



### Photo Electrical Cell

The fitting accepts all manufacturers Photo Electrical Cells as an option

### Weight & Windage

Average weight 12Kgs depending on gear. Windage 0.08mtr sq

## Dimensions

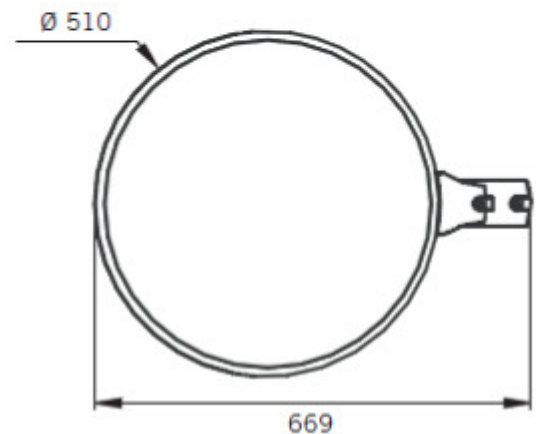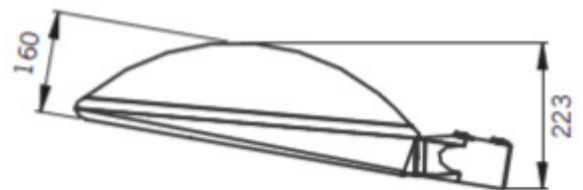

## Typical Applications

- ✓ Car Parks
- ✓ Amenity
- ✓ Street / Highway
- ✓ Exterior
- ✓ House Builders

319, Long Acre, Nechells, Birmingham, UK. B7 5JT

Tel 0121 678 6700 Fax 0121 678 6701

Email: sales@candela.co.uk Web: www.candela.co.uk

Candela Light is a trading name of Candela Traditional lighting Limited Design Right subsisting in the design of articles shown herein are the property of Candela Traditional Lighting Limited



**c a n d e l a**

L I G H T