

Somerset

Specification

Material

The Somerset bollard is manufactured in cast LM6 Aluminium
The lens is polycarbonate and can be either clear, frosted or opal.

Ingress Protection

IP 44 Optical Compartment ,(Optional IP 65) IP 44 Gear Compartment.

Finishes

Polyester Powder Coated any BS or RAL colour or stoving acrylic paint to any colour.

Optics

Can be fitted with the Candela Symmetrical Louvre or LED's are fitted with variety of optical lenses

Gear

Sodium and CDMT-T	50w Max
Metal Halide	50w Max
Cosmopolis	45w Max
Compact Fluorescent	70w Max

LED Aray 3w - 24w

Maintenance


Gear is mounted on a back board and accessed by removing the top and sliding out. The lamp is accessed by removing the top casting also.

Photo Electrical Cell

The fitting accepts miniature Photo Electrical Cells as an option

Fixing Details

The bollard is complete with an integral Fabricated steel root which is full galvanized.

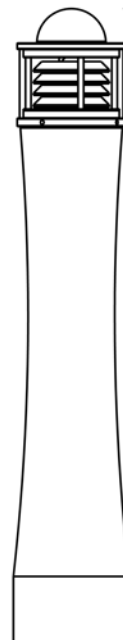

Height 900 mm Nominal

Dia 168mm

319, Long Acre, Nechells, Birmingham, UK. B7 5JT

Tel 0121 678 6700 Fax 0121 678 6701

Email: sales@candela.co.uk Web: www.candela.co.uk

Candela Light is a trading name of Candela Traditional lighting Limited Design Right subsisting in the design of articles shown herein are the property of Candela Traditional Lighting Limited



candela

L I G H T