
## DTS Adur Tree Grille

Fully integrated ductile iron tree grille systems.



T: +44 (0)1580 830 800 E: enquiries@greenblue.com W: greenblue.com

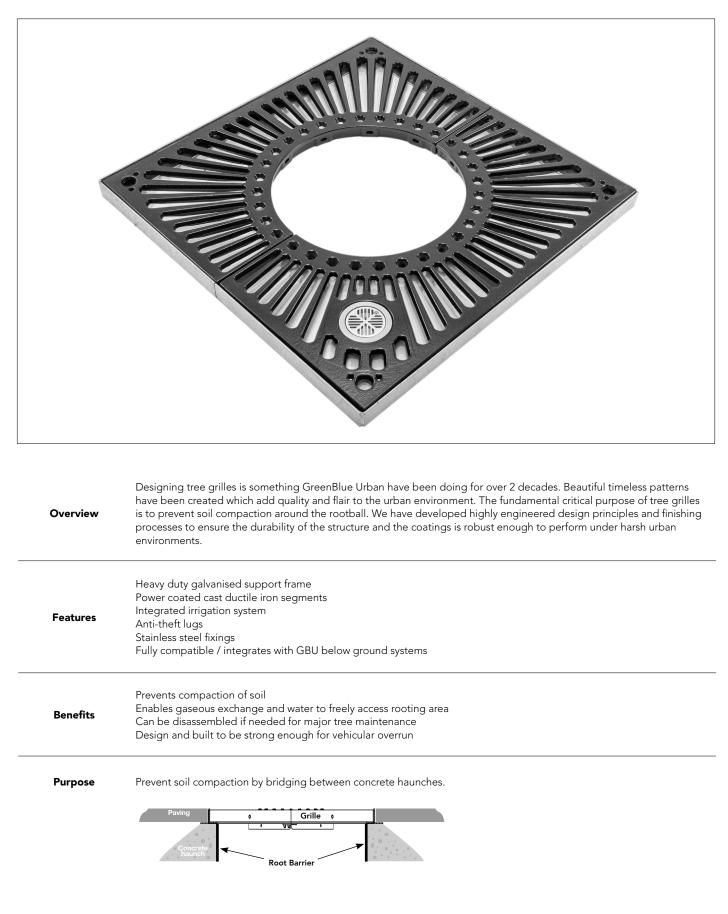

	Code	Perimeter Dimensions	Internal Aperture Diameter	Includes:
Product codes	ADUR10A	1000mm	500mm	- Heavy duty galvanised support frame - Powder coated grille segments
	ADUR12A	1200mm	600mm	- Cast aluminium RootRain irrigation inlet - Perforated pipe RootRain irrigation system
	ADUR15A	1500mm	600mm	- Stainless steel fixings
	<b>4</b>	1000-1500mm	<b>&gt;</b>	
Dimensions				71mm 50mm
Vehicle Overrun	Maximum 1.5 ton	ne SMWL (Slow M	loving Wheel Load)	
			e-coat powder coat finishir	
Powder Coat Finish	Tested to Artificia Conforms to Corr Conforms to ISO Resistance to Hur Kesternich Test: 3 Adhesion Test: 0 Bucholz Indentati	Il Weathering ISO rosiveness Catego 12944-6 - IM3 - so midity: 720 hours a 0 cycles according according to ISO 2 fon Test: ≥87 accor	11341, Natural Weathering ry C5-Industry / C5-Martim il and the Durability Range according to ISO 6270 g to ISO 3231 2409	
	Tested to Artificia Conforms to Corr Conforms to ISO Resistance to Hur Kesternich Test: 3 Adhesion Test: 0 Bucholz Indentati Porosity Density T	Il Weathering ISO rosiveness Catego 12944-6 - IM3 - so midity: 720 hours a 0 cycles according according to ISO 2 fon Test: ≥87 accor	11341, Natural Weathering ry C5-Industry / C5-Martim il and the Durability Range according to ISO 6270 g to ISO 3231 2409 rding to ISO 2815 according to DIN 55 670	ı ISO 2810 e - Durability Range of 'High' Exp. lifespan >15yrs
	Tested to Artificia Conforms to Corr Conforms to ISO Resistance to Hur Kesternich Test: 3 Adhesion Test: 0 Bucholz Indentati Porosity Density T Specific slip resist	Il Weathering ISO rosiveness Catego 12944-6 - IM3 - so midity: 720 hours a 0 cycles according according to ISO 2 fon Test: ≥87 accor Test: 'non-porous' tance report availa	11341, Natural Weathering ry C5-Industry / C5-Martim il and the Durability Range according to ISO 6270 g to ISO 3231 2409 rding to ISO 2815 according to DIN 55 670	ISO 2810 e - Durability Range of 'High' Exp. lifespan >15yrs of 'High' Exp. lifespan >15yrs
	Tested to Artificia Conforms to Corr Conforms to ISO Resistance to Hur Kesternich Test: 3 Adhesion Test: 0 Bucholz Indentati Porosity Density T Specific slip resist	Il Weathering ISO rosiveness Catego 12944-6 - IM3 - so midity: 720 hours a 0 cycles according according to ISO 2 ion Test: ≥87 accor Fest: 'non-porous' tance report availa RAL 9005 Matt Blac	11341, Natural Weathering ry C5-Industry / C5-Martim il and the Durability Range according to ISO 6270 g to ISO 3231 2409 rding to ISO 2815 according to DIN 55 670 ible to order	ISO 2810 e - Durability Range of 'High' Exp. lifespan >15yrs of 'High' Exp. lifespan >15yrs
Finish	Tested to Artificia Conforms to Corr Conforms to ISO Resistance to Hur Kesternich Test: 3 Adhesion Test: 0 Bucholz Indentati Porosity Density T Specific slip resist Standard colour F Available to orde Spare fixing kit Guard to grille fix Annual inspectio Clean irrigation a Assess physical / o	Il Weathering ISO rosiveness Catego 12944-6 - IM3 - so midity: 720 hours a 0 cycles according according to ISO 2 ion Test: ≥87 accor Fest: 'non-porous' tance report availa RAL 9005 Matt Blac er ing pack	11341, Natural Weathering ry C5-Industry / C5-Martim il and the Durability Range according to ISO 6270 g to ISO 3231 2409 rding to ISO 2815 according to DIN 55 670 ible to order ck <u>Full range of RAL colour</u>	g ISO 2810 e - Durability Range of 'High' Exp. lifespan >15yrs of 'High' Exp. lifespan >15yrs

T: +44 (0)1580 830 800 E: enquiries@greenblue.com W: greenblue.com

