


# Type N Specification Parameters

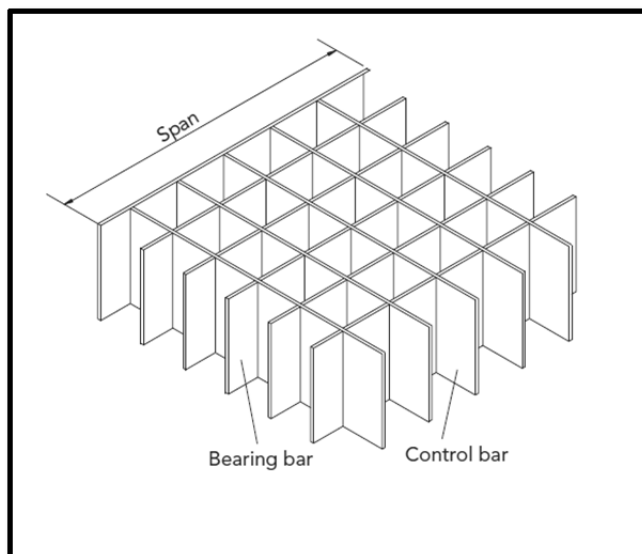

**Materials:** Carbon Steel Grade S235JRG2 (240 Yield) (available finishes 1, 2, 3)  
Carbon Steel to BS EN 10149-2 (420 Yield) (available finishes 1, 2, 3)  
Stainless Steel Grade to BS EN 1.4301 & 1.4404 (available finishes 4, 5, 6)  
Corten A (3mm thick only) (supplied unfinished for weathering)  
Aluminium (3mm thick bearing bars only) (available finishes 2, 7)

**Finishes:**

- 1 Hot Dipped Galvanised to BS EN 1461:2009
- 2 Polyester Powder Coated BS EN 13438: 2005
- 3 Electro Plated Zinc to BS EN 2081: 2008
- 4 Chemically Cleaned to BS EN 2516: 1997
- 5 Electro Polished to BS EN 15730: 2000
- 6 Bead Blast (Glass bead or Stainless Steel shot)
- 7 Anodised to BS EN 7599: 2010

**Mesh Sizes:** Generally From 8mm – 150mm

**Bearing Bars:** 20mm - 80mm in 2mm, 3mm, 3.5mm & 5mm thick

**Panel Sizes:** Bespoke up to 3000x1250mm (subject to weight & specification)  
- larger sizes available upon agreement  
- Standard stock sizes available

**Notes:** Serrated bars can be supplied in one, both or even on specific bars if required.