


Our 'Low Profile' aluminium framed opening ventilators can be readily incorporated into our single glazed patent glazing systems. With a choice of top or side hung hinges our ventilators can be supplied in Polyester Powder, Anodised or Mill finish and glazed with 6-24mm thick infills.

To guarantee water tightness, all roof vents must be installed to a minimum pitch of 15°.

TYPICAL PLAN ON ROOF GLAZING

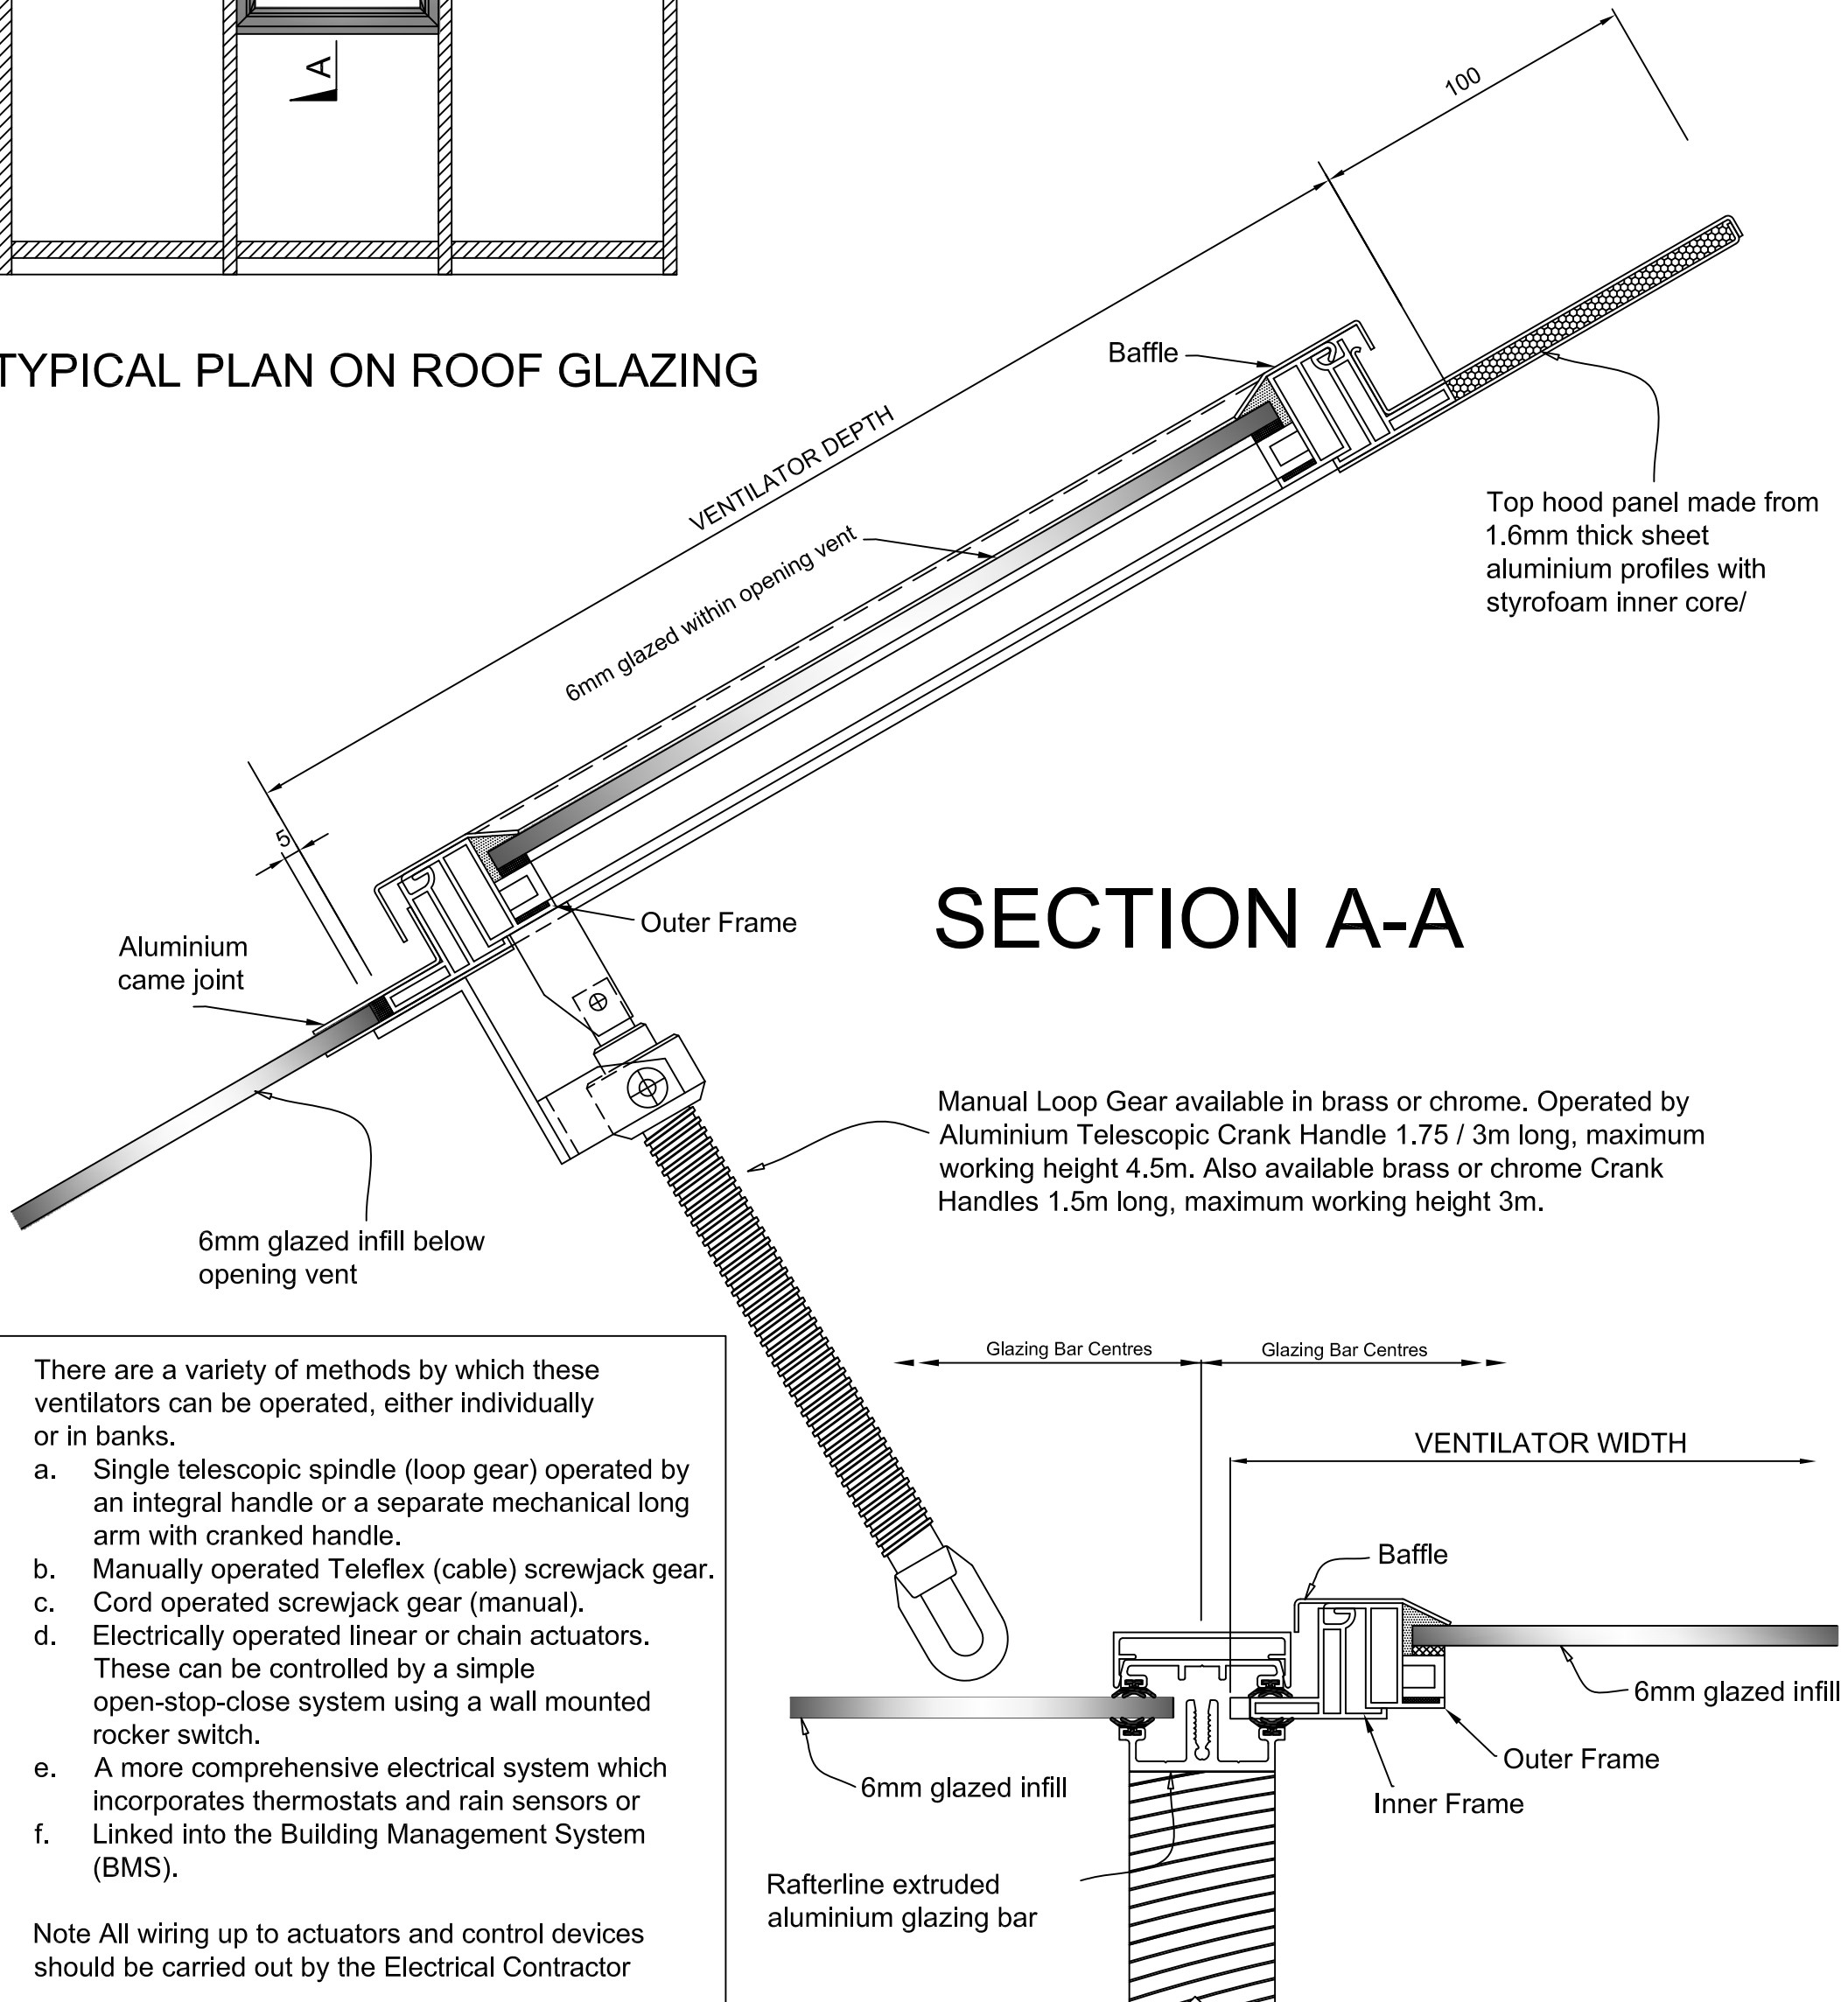

SECTION A-A

Manual Loop Gear available in brass or chrome. Operated by Aluminium Telescopic Crank Handle 1.75 / 3m long, maximum working height 4.5m. Also available brass or chrome Crank Handles 1.5m long, maximum working height 3m.

- There are a variety of methods by which these ventilators can be operated, either individually or in banks.
- Single telescopic spindle (loop gear) operated by an integral handle or a separate mechanical long arm with cranked handle.
  - Manually operated Teleflex (cable) screwjack gear.
  - Cord operated screwjack gear (manual).
  - Electrically operated linear or chain actuators. These can be controlled by a simple open-stop-close system using a wall mounted rocker switch.
  - A more comprehensive electrical system which incorporates thermostats and rain sensors or
  - Linked into the Building Management System (BMS).
- Note All wiring up to actuators and control devices should be carried out by the Electrical Contractor

SECTION B-B