

Function and Play value

For giving the Multi-surface Swing a new design, we developed the special version with metal cross beam. The technically thought-out corner connections make the equipment very sturdy. A playground is not complete without a swing. Children need the possibility of swinging during their development. Swinging to and fro is a basic movement and is fun not only for children. Swinging has a comforting effect, removes tensions and provides pleasure, particularly if swinging is possible side by side.



Order No. 6.12800 Multi-surface Twing Swing



Fundamental characteristics

- high-quality design
- incentive for playing: swing suspension
- movement: swinging, jumping off

Suitable

- for children from 3 years
- for playgrounds near houses
nurseries
children's homes
public playgrounds

Multi-surface Swing
Multi-surface Swing special
Multi-surface Twing Swing
Multi-surface Twing Swing special

© Richter Spielgeräte GmbH 09/13


Design and Copyright




6.12600



L6.12620




6.12800




L6.12820

Order No. 6.12600/6.12800
Multi-surface Swing, Multi-surface Twin Swing

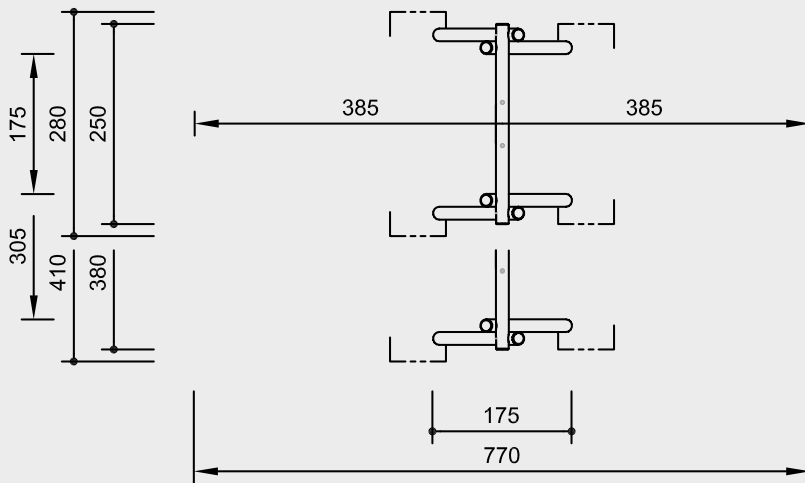

Order No. L6.12620/L6.12820
Multi-surface Swing special
Multi-surface Twin Swing special

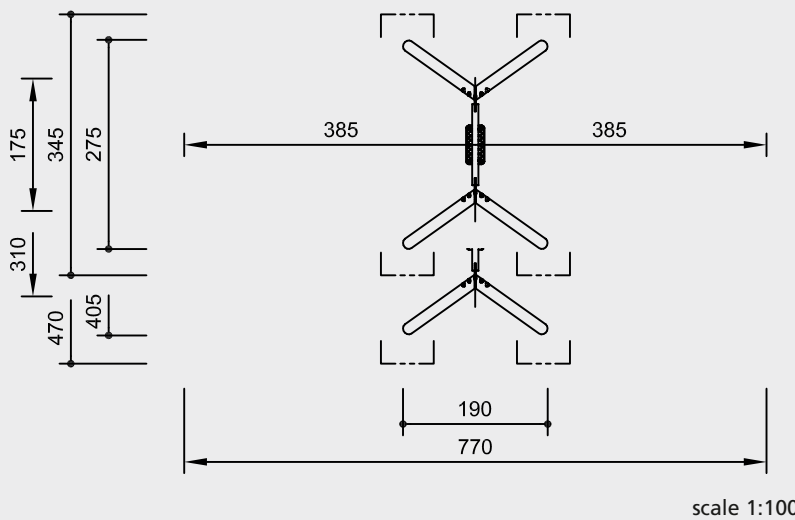

Safety check according to EN 1176

Components

Order No. 6.12600/6.12800
Multi-surface Swing
Multi-surface Twin Swing

1 swing frame
 with 1 or 2 complete suspension
 attachments

Order No. L6.12620/L6.12820
Multi-surface Swing special
Multi-surface Twin Swing special

1 swing frame
 with steel feet and metal cross beam
 with 1 or 2 complete suspension
 attachments with swing seats

Installation information

Surfacing requirements
 corresponding to a fall height of 1.40 m
 (please refer to price list for more
 detailed information)

Foundations

Order No. 6.12600/6.12800
 4 items 60 x 70 x 60 cm, excavation 80 cm

Order No. L6.12620/L6.12820
 4 items 60 x 70 x 40 cm, excavation 60 cm

Attention:

**Exact measurements may vary, for
 all installation dimensions refer to
 current installation instructions.**

Technical changes reserved.


**Order No. 6.12600 and 6.12800 also
 available with steel feet.**



6.12600



L6.12620



6.12800



L6.12820

Technical information

Order No. 6.12600/6.12800

de-barked

de-barked posts, Ø 15 - 18 cm, of
 spruce/fir, boiler pressure impregnated
 according to DIN 68800, hazards
 class 4



perforated

the earth/air zone of the wood is perforated
 by small bore holes to ensure that
 the impregnating agent penetrates this
 particularly endangered zone



rubber seat

rubber seat with anatomically correct
 shape, strong profiled steel insert and
 soft shock absorbing edge



swing joint

drop-forged swing joint with bush with
 graphite sleeve for self-lubrication and
 integrated swivel



concealed head

large surface for pressure distribution,
 prevents water from getting inside, pro-
 tects the bolt head, easy procurement
 of spare parts by company trademark
 indelibly inscribed on the equipment



adjustable bolts

no projecting threads after re-tighte-
 ning due to two-piece bolt connection



strong fastening

bolt connections with milled metal
 rings for connections which are stressed
 cross-wise



brass bush

for all to and fro movements we use
 bush bearings which allow for self-
 lubrication while in use



chains

suspended on short-link chains, 6 mm,
 welded before hot-dip galvanisation
 (stainless steel chains available on
 request)



Order No. L6.12620/L6.12820

materials as before, but posts of
 mountain larch, selected according to
 eight quality criteria

ground anchor

steel feet hot-dip galvanised



crossbar

of galvanised steel, with rigid corner
 connection



Dimensions

(small deviations possible)

| Order No. | 6.12600 | 6.12800 |
|----------------|---------|---------|
| height | 2.50 m | 2.50 m |
| width | 2.50 m | 3.80 m |
| depth | 1.75 m | 1.75 m |
| weight approx. | 235 kg | 250 kg |

| Order No. | L6.12620 | L6.12820 |
|----------------|----------|----------|
| height | 2.60 m | 2.60 m |
| width | 2.75 m | 4.05 m |
| depth | 1.90 m | 1.90 m |
| weight approx. | 200 kg | 220 kg |

For more detailed explanation of the
 quality characteristics see price list.