



Swings

(technical specification)


J442



- 1- **The 125mm round posts** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.
The caps are made of injection moulded polyamide.



- 2- **The seat** is made of polypropylene rope. It is fixed to a stainless-steel frame, suspended from galvanised steel ropes covered in polyester, and extended with a galvanised steel chain.

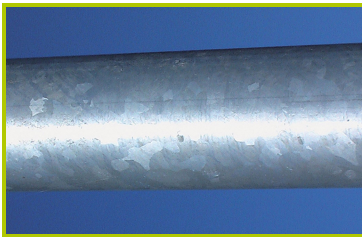

- 3- **The horizontal beam** is made of non-painted galvanised steel.



- 4- **The tubes** are made of 60mm diameter steel.



- 5- **The swing bearings** are made of stainless steel.



- 6- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.