





Springers

(technical specification)

J953

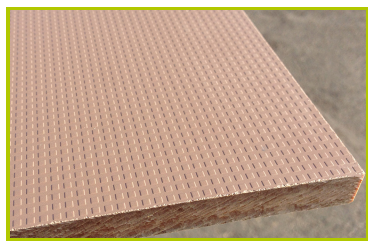

1- **The platform** is made from a 12.5mm thick textured and non-slip compact material (HPL).

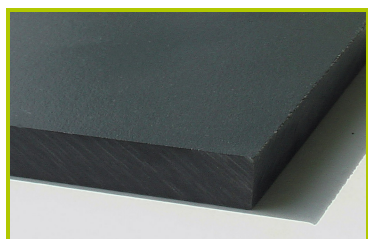

2- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



3- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



4- **The springs** are made from Grade 35SCD6 steel, shot blasted, stress relieved, zinc coated and finished with two coats of epoxy polyester powder. Proludic have patented an exceptionally strong and secure polyamide fixing for the spring, ensuring a long product life.



5- **The dampener** is made from rubber.



6- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.