

Self Binding Gravel

Getting Started

It is recommended that a timber edging is laid down to receive the Self Binding Gravel. Dig out unsuitable material to approx. 150mm for paths; 225mm for drive ways. Below final level required.

Prepare surface with a hardcore sub-base (D), then overlay with 50mm nominal thickness regulating course of granular sub-base material type 1(C), laid and compacted with a minimum 6 tonne roller. The regulating course should be laid to incorporate falls and profiles, it should be blinded with sufficient dust to seal all interstices (B). It is essential that this base allows free drainage.


A quality weed killer should then be applied to the regulating course following the manufacturers instructions.

Application of the Wearing Course

The Self Binding Gravel wearing course should be rolled to a consolidated thickness of 50mm for paths and 100mm for drives and parking areas, using a minimum 1 tonne roller. The wearing course should be sprayed with clean water to achieve binding in periods of dry weather.

Required quantities table

Location	Quantity	Course Depth	Coverage
Footpaths	1 tonne	50mm	10 -Square Metres
Drives & Car Parks	1 tonne	100mm	5 - Square Metres

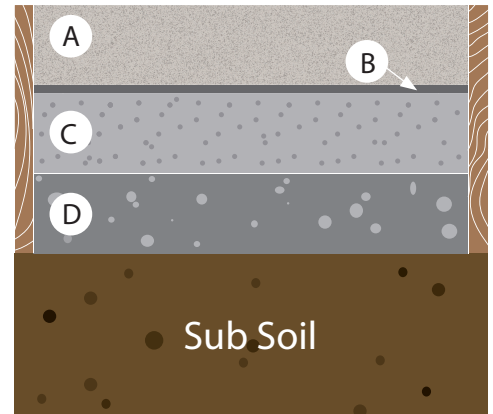

- A: Self Binding Gravel
- B: Blinding Material
- C: Type-1 Sub base Material
- D: Hardcore Sub-base

Deliveries

Bulk deliveries can be made in tipping lorries. Customers are advised to ensure that they have a suitable access for a large lorry and an allocated tipping area for the gravel.

IMAG Limited

5-7 Mill Street, Congleton, Cheshire CW12 1AB
 Telephone: 01260 278810 or 01260 278287 Fax: 01260 278331
 Online: www.imag.co.uk

