






SPG322/B/TRC3/GL/16 BAY



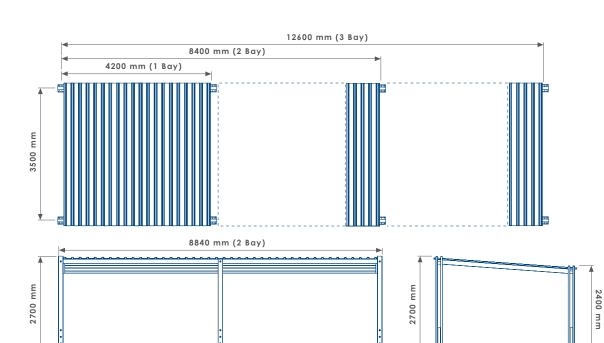


* Technical drawings not to scale

NOTE-

FINISHED GRADE

- Site Engineer to determine suitable fixing method.
- Fixing bolts by others 14 mm dia. holes (use M12 bolts).
- Size of concrete foundation and concrete mix to be determined on site, taking ground conditions into account and local wind and snow loads
- Roof covering in Stucco profile aluminium sheet or 16 mm Multiwall polycarbonate as standard.
- Galvanised steel guttering option available at extra cost.
- Image shown with upgraded roof specification.



SHELDON COVERED WALKWAY SPG322

PRO	DUCT DIMENSIONS HEIGHT	2700 mm		LENG	TH 4200 mm WIDTH 3500	mm								
	Direct Embedment/Root Fix	Α			Treated Redwood Class 3 Unstained	TRC3	TRC3	Aluminium Powder Coated	APC		Black	502-8450	ВК	
	Below Finished Grade Base Fix	В	✓		Treated Redwood Class 3 Stained Dark Oak	TRC3-DO	Galvanised	GL	✓	White	502-8102	WT		
PTION	Surface Mount	С	~		Treated Redwood Class 4 Unstained	TRC4	4	Galvanised and Powder Coated	GPC	✓ ~	Champagne	502-8341	СР	
	Plinth Mount - Buff Exposed Aggregate	D-BEA		¥	Treated Redwood Class 4 Stained Dark Oak	TRC4-DO	$\overline{\mathbf{V}}$	META	Zinc Plated and Powder Coated	PPC		Concrete	502-2167	СС
	Plinth Mount - Buff Granite	D-BG		器	Treated Softwood Unstained	TS			Stainless Steel	\$\$-304/316	☑ ਰ	Boulder	502-2171	ВО
0	Plinth Mount - Grey Granite	D-GG		₽	Douglas Fir	DF		Арех Тор	AT	■	Navy	502-1125	NV	
Ĭ	Free Standing	FS			FSC Hardwood Iroko	НІ	$\overline{\mathbf{V}}$	☑	Chamfer Top	СТ	<u> </u>	Midnight Blue	502-2161	MB
※	Free Standing with Base Weight	FS-BW		S .	Recycled Plastic - Black	RP-BK		Dome Top	DT	III ₹	Рорру	502-8255	PP	
	Wall Mount	WM			Recycled Plastic - Grey	RP-GY		9	Flat Top	FT		Mandarin	502-8204	MA
	Non Standard	NS			Recycled Plastic - Green	RP-GN RP-BR		ř	Open Top	ОТ		Buttercup	502-2166	ВС
	To BREEAM Standard	B06/B08			Recycled Plastic - Brown			Slant Top	ST		Tennis	502-8056	TN	

3300 mm

