


The i3 Window Sealant System

How it works: “inside tighter than outside”

Proper sealing is an effective interaction of the outer, middle, and inner sealing levels on the principle of “inside tighter than outside.” By selecting appropriate products from our six system components, various combinations can be created to suit the installation situation. The resulting system will meet all the requirements of modern sealing technology.

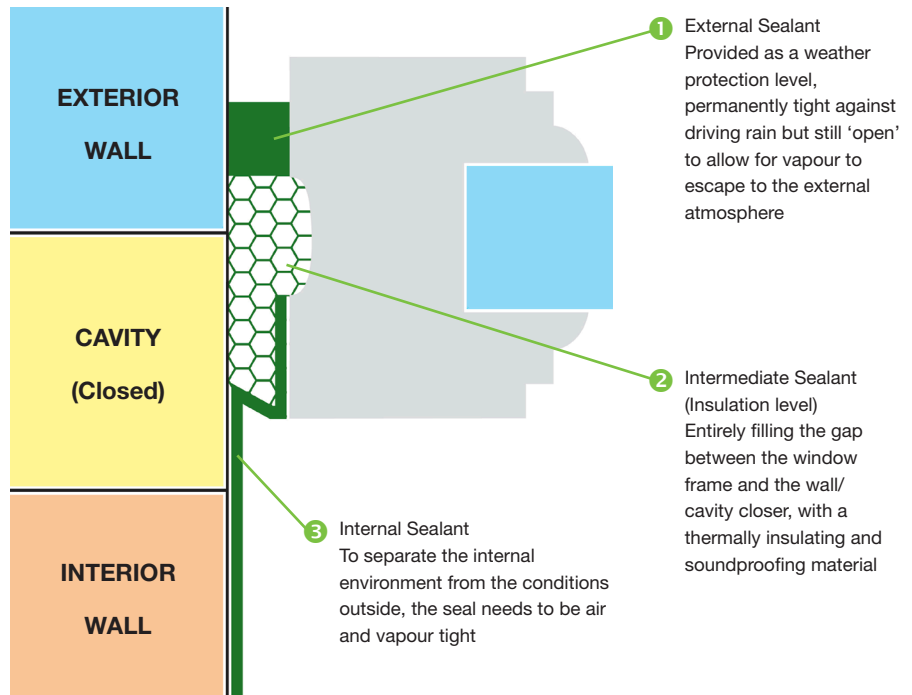

The result:

An externally weather-proof system, which also prohibits the warm, internal air penetrating the joint and forming condensation, a problem which can lead to a reduction in the level of thermal insulation, damage to building components and mould formation.

- a) Exceeds 600 Pa driving rain tightness, per DIN EN 1027 DIN and 18 542
- b) Effective filling of the window joint seal
- c) Airtight to UK Building Regulations and DIN 4108-7

10-year “i3” performance guarantee*

The “i3” Window Sealant System from illbruck comes with a 10-year insurance-backed guarantee* for the performance of the joints.

* Under the conditions specified by Tremco illbruck - available on request

Find the Right Product

The Tremco illbruck colour guide system allows you to find the right products for external, intermediate, and internal sealing.

