

Parklight Asymmetric



Mounting height
4 to 5 metres

Body
cast aluminium


Finish
powder coated
silver - RAL 9006.
Underside of reflector
white

Lamps
included - colour
temperature to
customer specification


Fixation
pole top
(details on request)

Protection
IP65, lamp and gear
compartment

Options
alternative finishes,
integrated photo-
electric cell

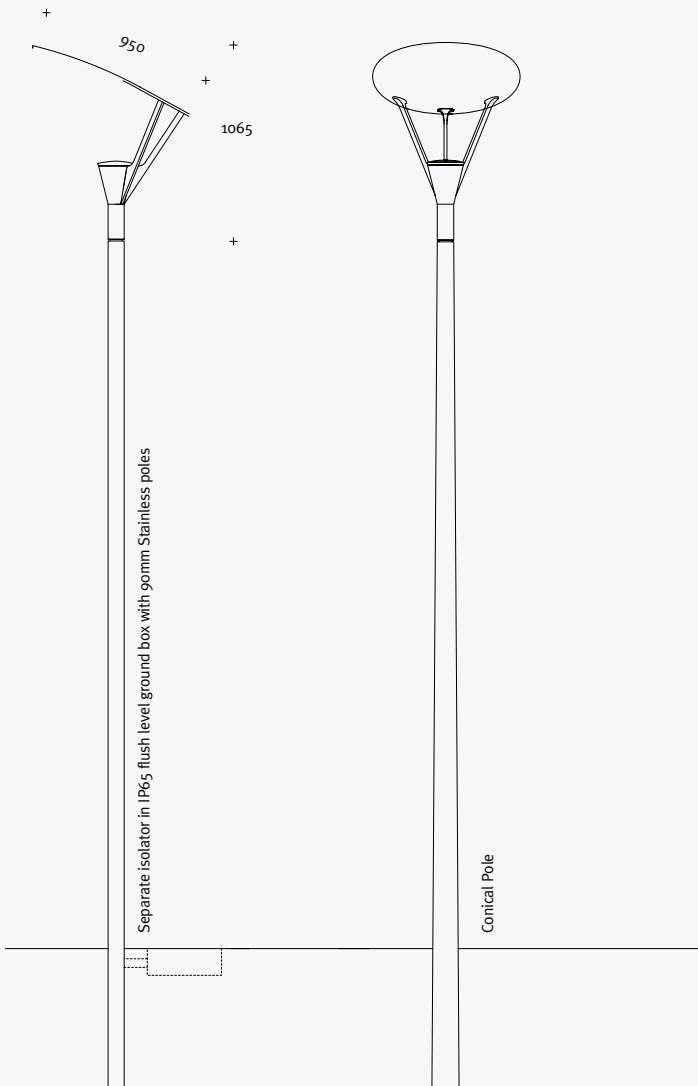

The GEO Parklight is available in both asymmetric or symmetric versions. Manufactured in high quality materials, the Parklight gives a comfortable, uniform illumination ideal for use in pedestrian spaces. Perforated roof option adds accent lighting to tree canopies.



| | POLE DIA | PERFORATED ROOF | SOLID ROOF |
|------------|----------|----------------------|----------------------|
| 70w CDM-T | 90mm | G-LA 30 10 0* | G-LA 31 10 0* |
| 70w CDM-T | 114mm | G-LA 40 10 0 | G-LA 41 10 0 |
| 150w CDM-T | 90mm | G-LA 30 20 0* | G-LA 31 20 0* |
| 150w CDM-T | 114mm | G-LA 40 20 0 | G-LA 41 20 0 |

* Separate isolator in IP65 flush level ground box with 90mm Stainless poles



