




POLYFLOR™
COVERING THE WORLD

Flooring Collection

Commercial and Residential Flooring

Pearlazzo PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

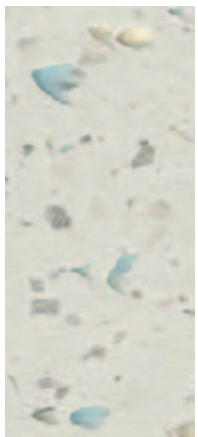

Chalk Burst 9703




Sailcloth 9719



Mineral 9704



Rain Cloud 9718

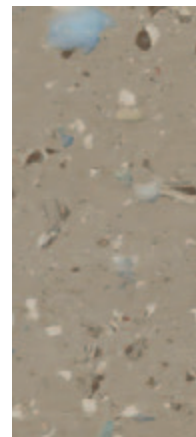

Wholemeal 9724



Truffle 9713


KEY FEATURES

Attractive, high performance, homogeneous floorcovering.


High quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.

Highest Group T abrasion rating / EN ISO 10581 Type I.


Unique multi-flake decoration. Conforms to EN649 / EN ISO 10581.



° Refer to BRE Global ratings on www.greenbooklive.com

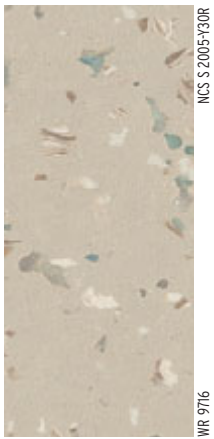

Toasted Almond 9716

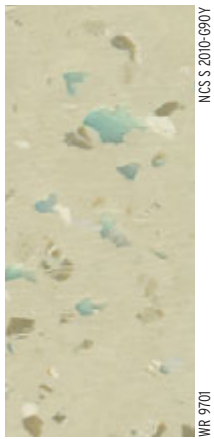

Wild Flax 9701



Mint Crisp 9706



Skylight 9709




Seafoam 9710




Autumn Fire 9717



Sandcastle 9712

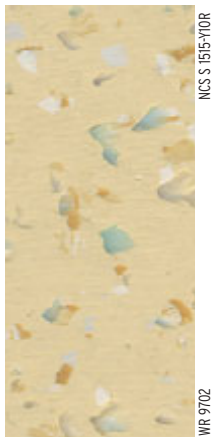

Lemon Ice 9702

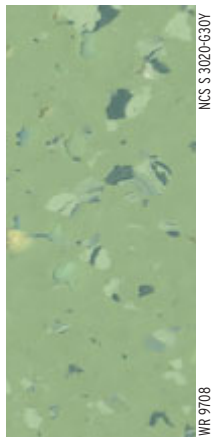


Alpine Meadow 9708



Atlantic Mist 9711



Lilac Bloom 9715

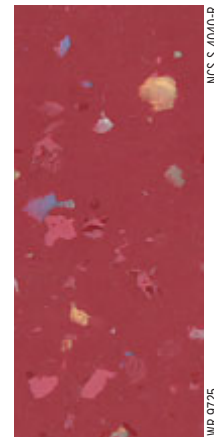


Dark Berry 9725



Caramel 9723



Sunrise 9721

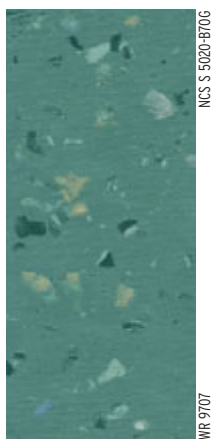

Satin Jade 9707



Ocean Ripple 9720



Purple Crush 9722



Charcoal 9705

WR = weld rod

SPECIFICATIONS




GAUGE: 2.0mm

AVAILABILITY: Sheet




Prestige PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT

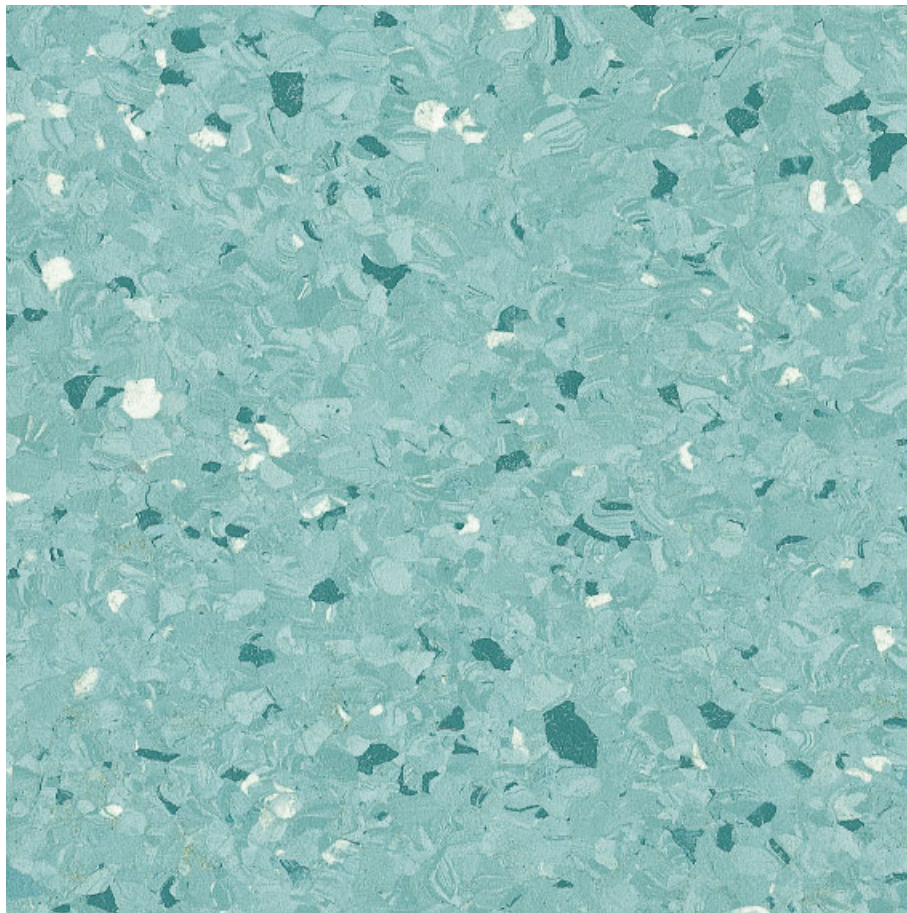


Peppermint 1870

NCS S 2020-B30G
WR 1870




Nutmeg 1910

NCS S 1510-Y50R
WR 1910




Alabaster 1600

NCS S 2005-Y10R
WR 0630




Cinnamon 1850

NCS S 1510-Y70R
WR 1850




Ice Crystal 1950

NCS S 2002-R50B
WR 1950




Gingerlily 1860

NCS S 2020-Y60R
WR 1860




Grey Marl 1930

NCS S 3502-R
WR 1930




Chilli 1960

NCS S 3040-Y70R
WR 1960




Clove 1830

NCS S 4502-B
WR 1830




Chive 1880

NCS S 2010-G20Y
WR 1880




Lavender Mist 1920

NCS S 2020-R40B
WR 1920




Pale Iris 1800

NCS S 2020-R90B
WR 1800




Stone Blue 1840

NCS S 4010-P90B
WR 1840




Bilberry 1900

NCS S 3040-P90B
WR 1900



Liquorice 1940

NCS S 6500-N
WR 1940



Thyme 1890

NCS S 1020-G40Y
WR 1890

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with tonal highlight chips.

Conforms to EN 649 / EN ISO 10581.


SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 300 x 300mm, 608 x 608mm




° Refer to BRE Global ratings on www.greenbooklive.com




Mystique PUR


HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT

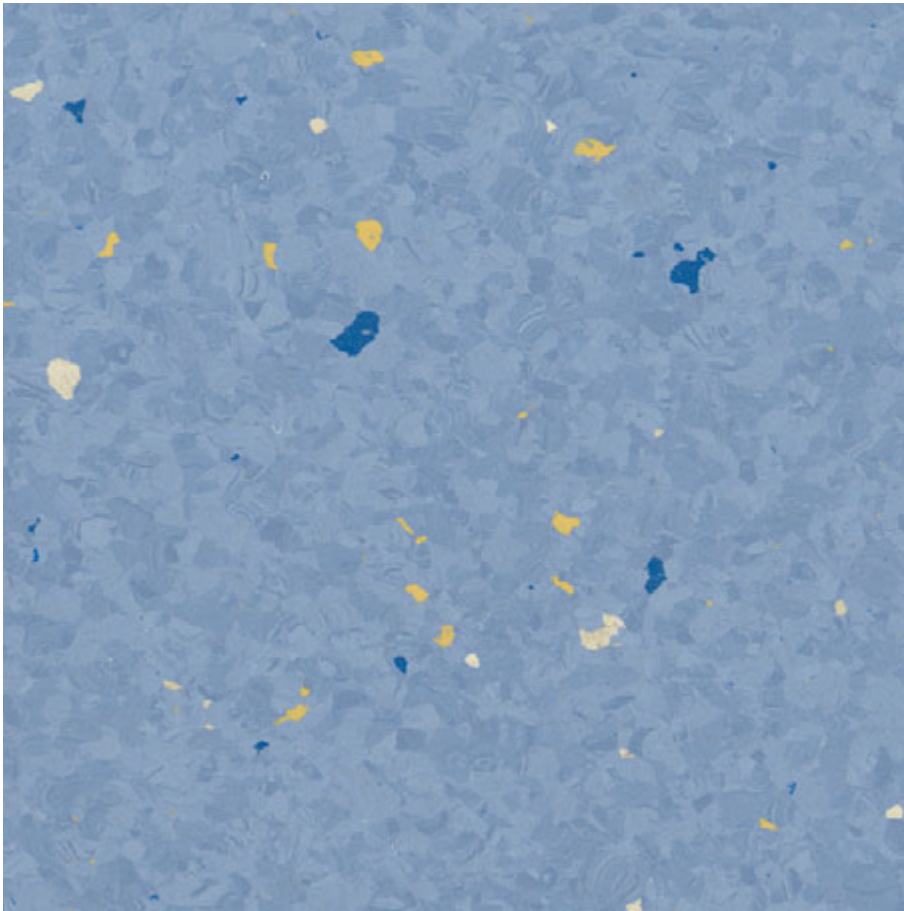


Azul 3570




Celeste 3520



Azurite 3510




Grigio 3410




Alpi 3620




Titanio 3600



Bianco 3480



Corallo 3460




Ametista 3500



Giallo 3580



Ambra 3440



Beola 3560

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with three non-tonal highlight chips.

Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS




GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 300 x 300mm, 608 x 608mm

It is recommended that a larger sample piece is viewed to appreciate the decoration.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




Classic Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING
A POLYURETHANE REINFORCEMENT

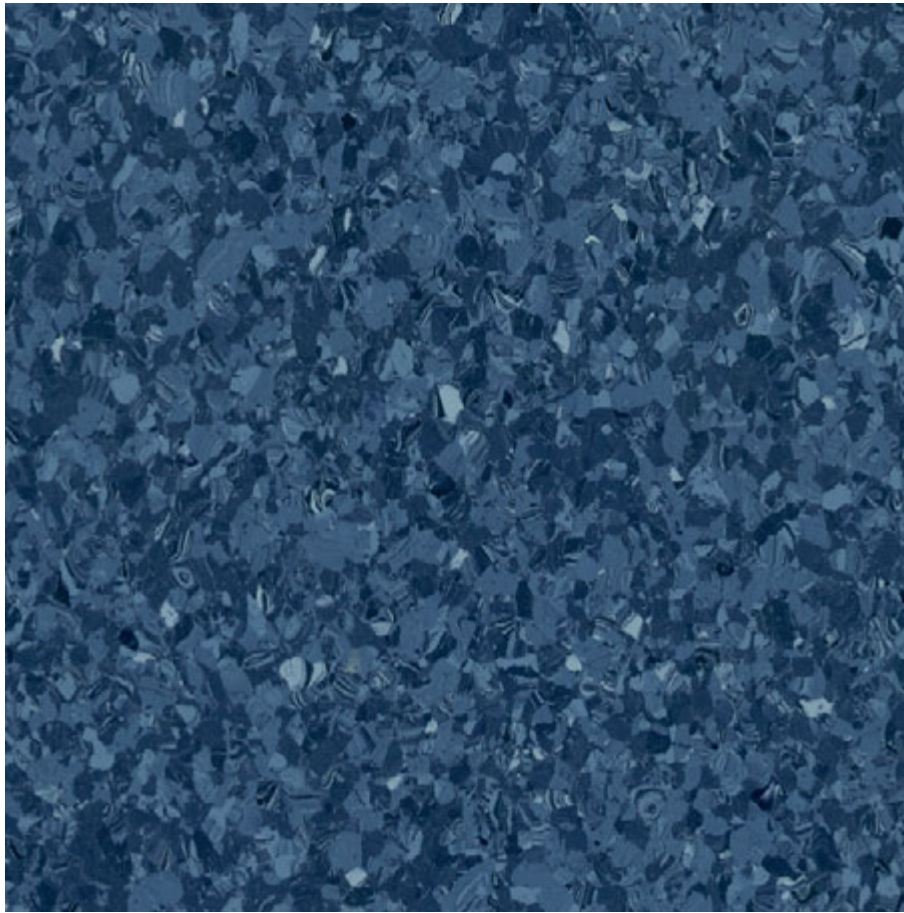

Delta Blue 1220

NCS S 6020-R80B
WR 1220



Coral Drift 1250

NCS S 3050-Y80R
WR 1250



Cornbrook 1240

NCS S 1030-Y10R
WR 1240




Wild Mint 1230

NCS S 2020-B90G
WR 1230



Cloudburst 1210

NCS S 2040-P90B
WR 1210




Mountain Lake 1330

NCS S 3020-P90B
WR 8350



Nocturne 1380

NCS S 5500S-R50B
WR 8270



Sunblaze 1260

NCS S 3560-Y80R
WR 1260



Satinwood 1370

NCS S 1505-Y30R
WR 8320



Silver Mist 1430

NCS S 1505-Y40R
WR 1430




Shoreline 1460

NCS S 2020-Y30R
WR 1460




Quartz 1400

NCS S 2002-B
WR 9340




Asparagus 1320

NCS S 2020-G40Y
WR 8360



Pale Slate 1200

NCS S 2005-B80G
WR 1200



Ladoga 1410

NCS S 1515-P90B
WR 1410



Smokestone 1160

NCS S 4502-G
WR 9120

KEY FEATURES

Attractive, high-performance, homogeneous floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Non-directional duotone chip decoration with marbled tonal highlight chips.

Conforms to EN 649 / EN ISO 10581.


SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Title: 300 x 300mm, 608 x 608mm



° Refer to BRE Global ratings on www.greenbooklive.com



2000 PUR


HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE REINFORCEMENT



Saffron 8490



Dawn Mist 8800



Lace Blue 8500*



Oak 8300*




Wild Lilac 8650




Blossom 8900



Stream 8050



Buckwheat 8850*




Stonewall 8230*




Sapphire 8550




Thistle 8600



Sequoia 8400



Brushed Ochre 8000



Rosehip 8950



Larkspur 8350*



Glacier Blue 8450




Mint Crest 8700



Willowbank 8380*



Glenbeck 8750



Shadow 8150

KEY FEATURES

Hardwearing, homogeneous commercial floorcovering.

High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.

Directional duotone marbled decoration with marbled highlight tones.

Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm

AVAILABILITY: Sheet (2.0mm, 2.5mm)

Tile: 300 x 300mm (2.0mm, 2.5mm),
608 x 608mm (2.0mm)

All colours are available ex-stock in 2.0mm.
*6 colours are available ex-stock in 2.5mm.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

XL PU

HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE SURFACE TREATMENT



Turquoise 3810*



Carnelian Beige 3890



Rose Quartz 3870*



Porcelain 3880




Pumice 3700*



Citrine 3930



Fossil 3710*



Dolomite 3910*



Flint 3720*




Connemara Green 3800




Blue Nickel 3730



Tanzanite Blue 3750



Azure 3770



Sablee Beige 3900*




Jade 3830



Crystal Blue 3740*



Blue Zircon 3760*



Ironstone 3850

All colours are available ex-stock in 2.0mm.

* 9 colours are available ex-stock in 1.5mm.

KEY FEATURES


Hardwearing, homogeneous commercial floorcovering.

Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Directional duotone marbled decoration.

Conforms to EN 649 / EN ISO 10581.


SPECIFICATIONS



GAUGE: 1.5mm, 2.0mm

AVAILABILITY: Sheet (1.5mm, 2.0mm)

Tile: 300 x 300mm (2.0mm), 608 x 608mm (2.0mm)



* Refer to BRE Global ratings on www.greenbooklive.com

Standard XL


HEAVY-DUTY VINYL FLOORING WITH A MARBLEISED DECORATION




Black Cherry 8580




Atlantic Blue 9170



Black Panther 8640*



Graphite 9120*



Slate Grey 9200*✓



Mushroom 9110*✓

All colours are available ex-stock in 2.0mm.

*4 colours are available ex-stock in 1.5mm.

✓2 colours are available ex-stock in 2.5mm and 3.0mm.


KEY FEATURES

Hardwearing, homogeneous commercial floorcovering, in a choice of gauges.

Directional duotone marbled decoration.

Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS




GAUGE: 1.5mm, 2.0mm, 2.5mm, 3.0mm

AVAILABILITY: Sheet (1.5mm, 2.0mm, 2.5mm, 3.0mm)

Tile: 300 x 300mm (2.0mm)

608 x 608mm (2.0mm)




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polyflex Plus PU


ECONOMICAL, GENERAL-PURPOSE VINYL TILE FEATURING
A POLYURETHANE SURFACE TREATMENT



Arran Beige 7420




Dover Grey 7330*



Border Grey 7110




Lomond Grey 7320



Snowdrop 6010




Pearl Grey 6130




Magnolia 6060*




Avon Sand 7080




Durham Fawn 7400*



Wensley Beige 7390



Mendip Mauve 7360




Mournie Grey 7310*



Walnut 6180*



Jersey Tan 7410*



Brecon Beige 7040*




Romney Green 7340




Pennine Fawn 7030




Firth Grey 7060*



Dark Brown 6300




Cambrian Bronze 7100




Cornish Cream 7370*




Cotswold Green 7010*



Anglian Red 7380*



Lakeland Blue 7350*



Black Tulip 6040

All colours are available ex-stock in 2.0mm. *12 colours are also available ex-stock in 1.5mm and 2.5mm.

KEY FEATURES

General-purpose, homogeneous vinyl tile.


Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10581.

Available in traditional or duotone marbling.


Traditional marbling colours include a secondary complimentary colour.

SPECIFICATIONS

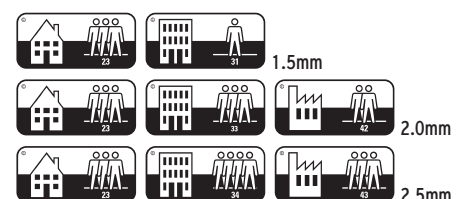

GAUGE: 1.5mm, 2.0mm, 2.5mm


AVAILABILITY: Tile: 300 x 300mm




† Refer to BRE Global ratings on www.thegreenguide.org.uk

Polysafe Corona PUR


HEAVY-DUTY SAFETY FLOORING WITH A MULTI-CHIP DECORATION

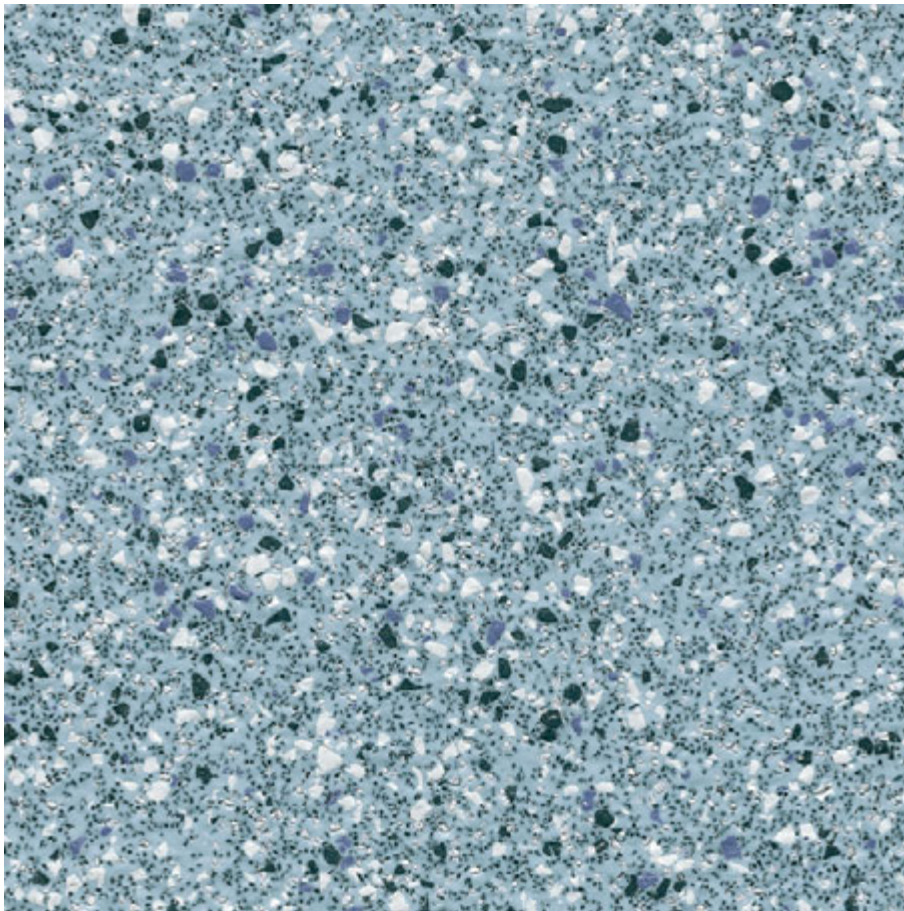


Geysers 5580




Grasshopper 5540




Seal 5570




Pacific 5550




Otter 5530




Bluebell 5510




Blackbird 5560




Seawater 5490




Drystone 5470



Barley 5500



Mango 5480



Tulip 5520

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet




° Refer to BRE Global ratings on www.greenbooklive.com




Polysafe Astral PUR


HEAVY-DUTY SAFETY FLOORING WITH MULTI-FLAKE DECORATION

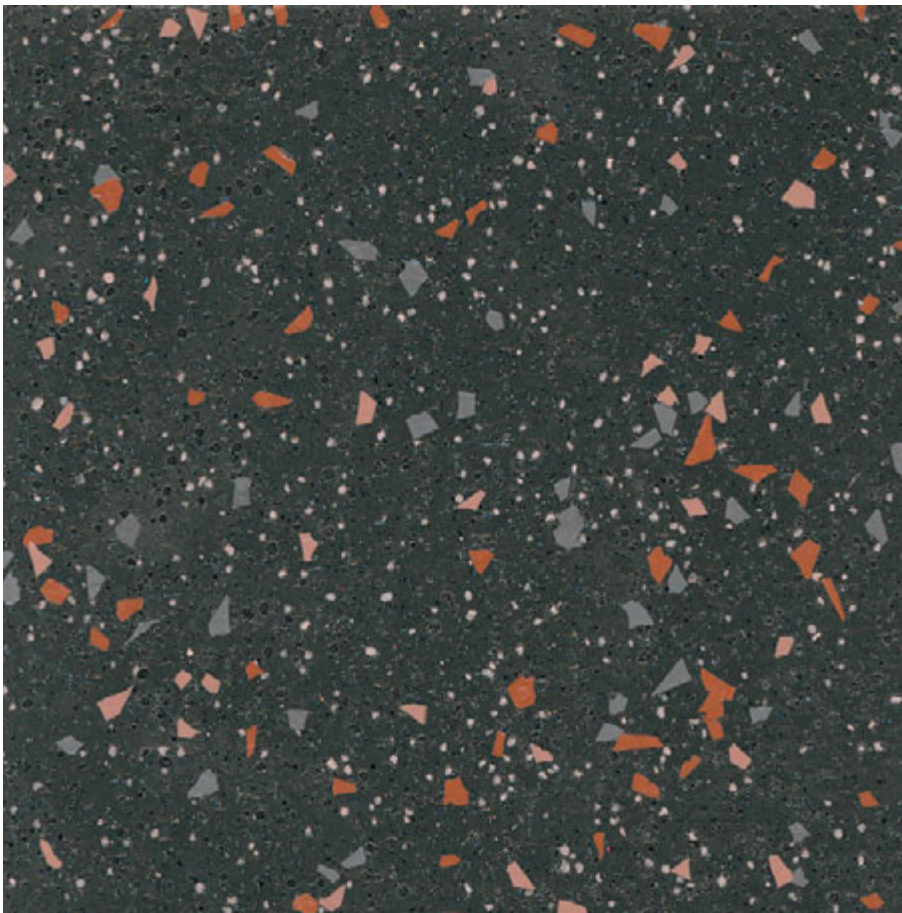


Lunar Grey 4240




Solstice 4260




Isis 4380




Vega Green 4270




Aquarius 4220




Polaris 4250




Nebula Blue 4200




Sculptor 4400




Red Sky 4310




Space Mauve 4230




Sunspot 4410



Orion Beige 4280



North Star 4370



Starburst 4300

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet




° Refer to BRE Global ratings on www.greenbooklive.com



Polysafe Mosaic PUR


HEAVY-DUTY SAFETY FLOORING WITH HIGH DENSITY FLAKE DECORATION AND PEARLESCENT

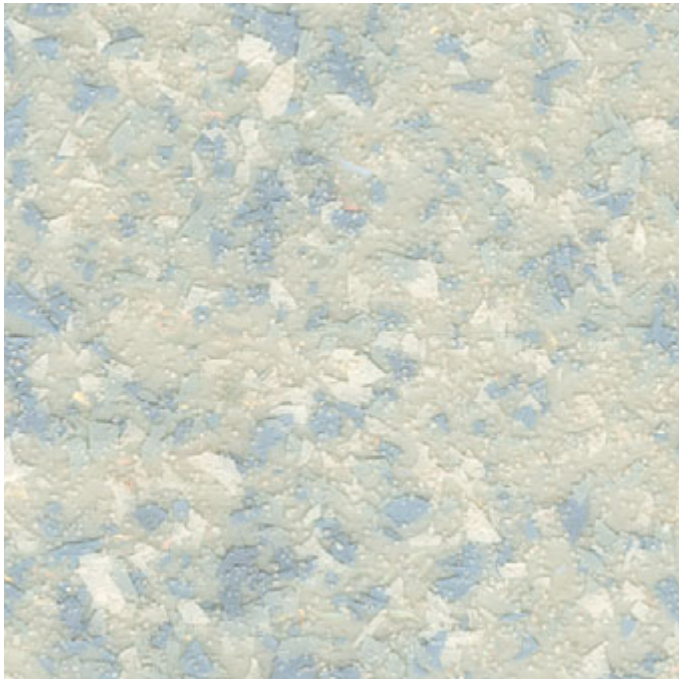

Pearlite 4115

NCS S 2005-670Y

WR 4115

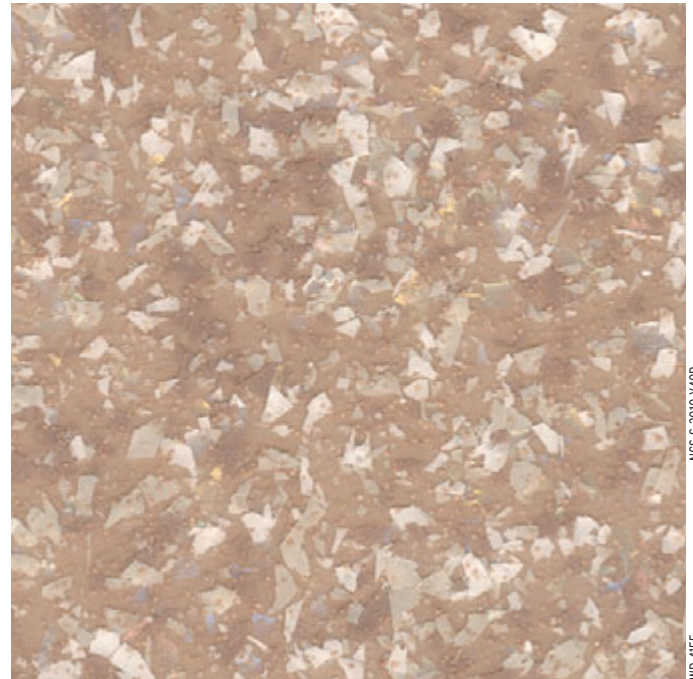

Earthstone 4155

NCS S 3010-140R


WR 4155



Akoya 4125

NCS S 3010-120R

WR 4125



Orient Grey 4135

NCS S 5500-N


WR 4135



Green Opal 4195

NCS S 4010-60Y

WR 4195



Freshwater 4145

NCS S 4020-B0G


WR 4145



Grey Fusion 4105

NCS S 3502-Y


WR 4105



Sunstone 4185

NCS S 3030-170R

WR 4185



South Sea 4175

NCS S 5020-H90B

WR 4175



Graphite Pearl 4165

NCS S 6500-N

WR 4165

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates aluminium oxide and coloured quartz particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet


It is recommended that a larger piece is viewed at floor level to appreciate the decoration



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Modena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING CLEAR MICRO-GRANITE DESIGNS



NCS S 2005-Y30R

WR 9800


Gypsum 4044



NCS S 3010-Y20R

WR 9801


Copal 4046



NCS S 2010-G30Y

WR 9809


Aventurine 4055



NCS S 2040-Y00R

WR 9811


Citrina 4048



NCS S 6010-G00Y

WR 9810


Green Tourmaline 4052



NCS S 3040-Y60R

WR 9812


Orange Calcite 4053



NCS S 5030-Y80R

WR 9813

Garnet 4056

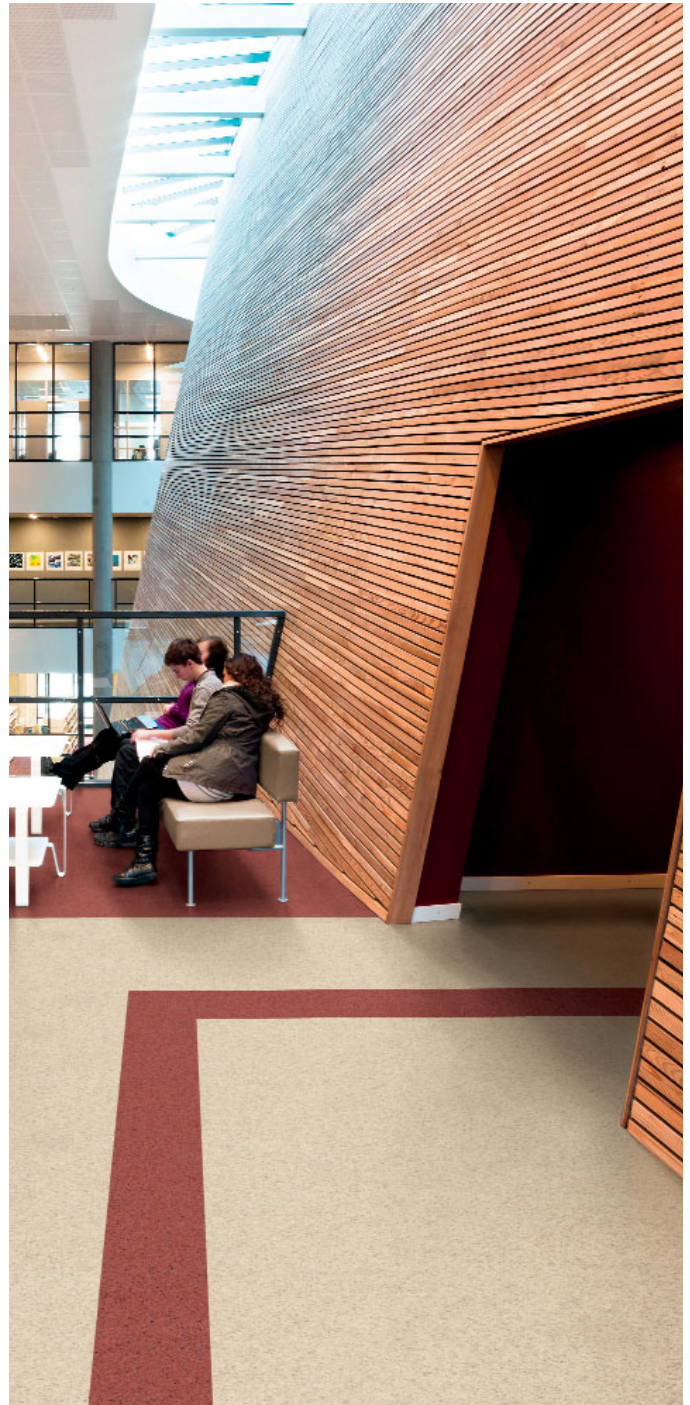

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity micro granite designs.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).


Conforms to EN 13845 50,000 cycles abrasion test.




100% RECYCLABLE

CONTAINS RECYCLED MATERIAL


† Refer to BRE Global ratings on www.thegreenguide.org.uk




Grey Fluorite 4042

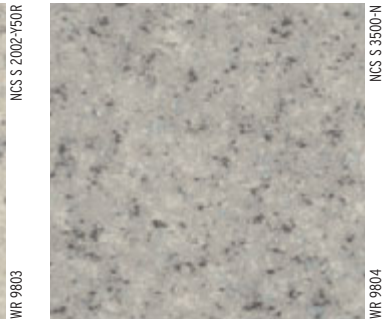


Agate Grey 4043




Galena 4047

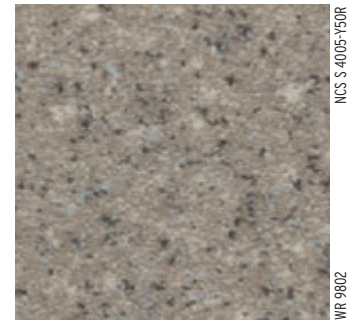

Andesite 4049



Angelite 4051

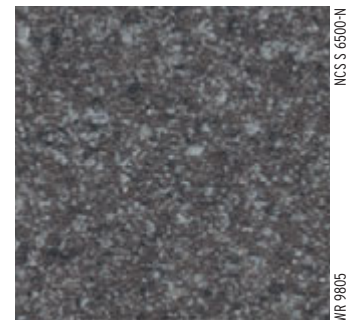

Jetstone 4045



Blue Quartz 4054

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet



Polysafe Arena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING ABSTRACT, MATERIAL AND STONE DESIGNS



NCS S 2005-Y50R

WR 5081


Linen 5081



NCS S 2010-Y10R

WR 5090

Crema Nova 5090



NCS S 5502-Y

WR 5082


Steelwool 5082



NCS S 5005-Y80R

WR 5092

Clay Stone 5092



NCS S 4000-N

WR 5083


Chambray 5083



NCS S 4005-Y50R

WR 5091

Flagstone Grey 5091

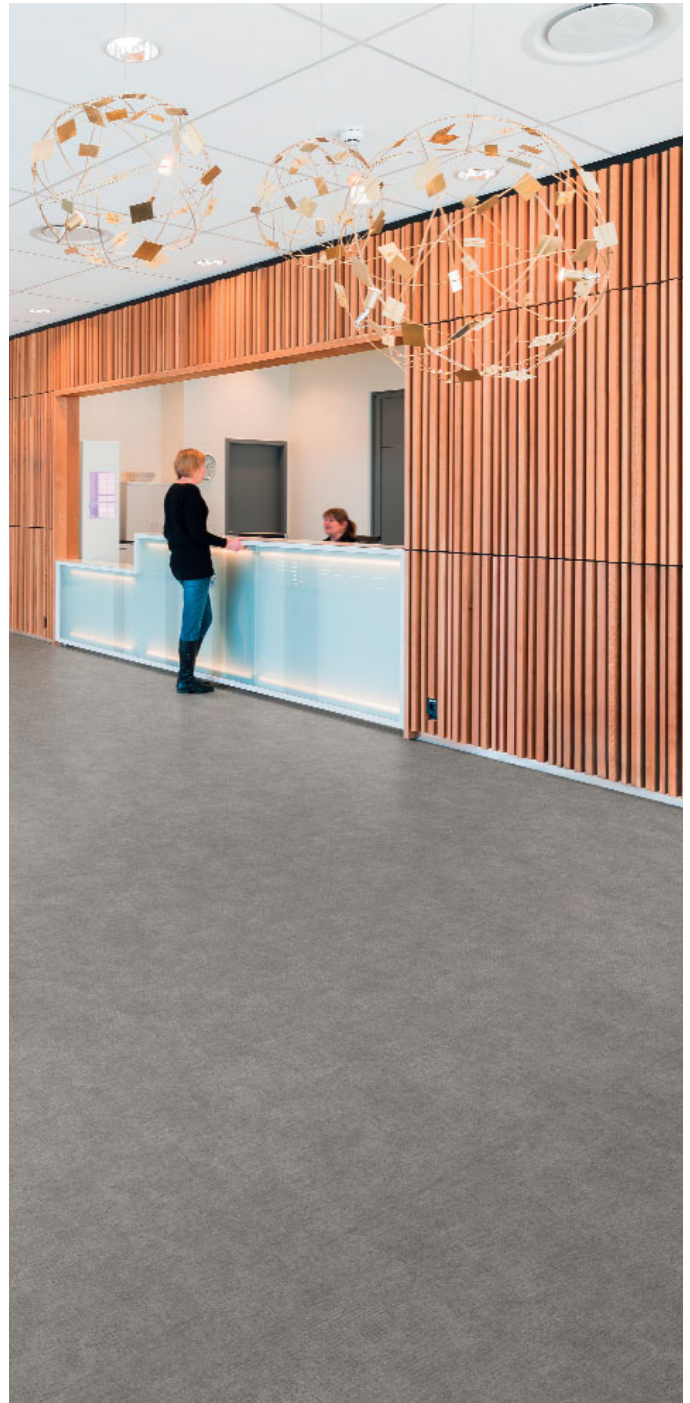

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity abstract, stone and material effects.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).


Conforms to EN 13845 50,000 cycles abrasion test.




100% RECYCLABLE

CONTAINS RECYCLED MATERIAL

† Refer to BRE Global ratings on www.thegreenguide.org.uk

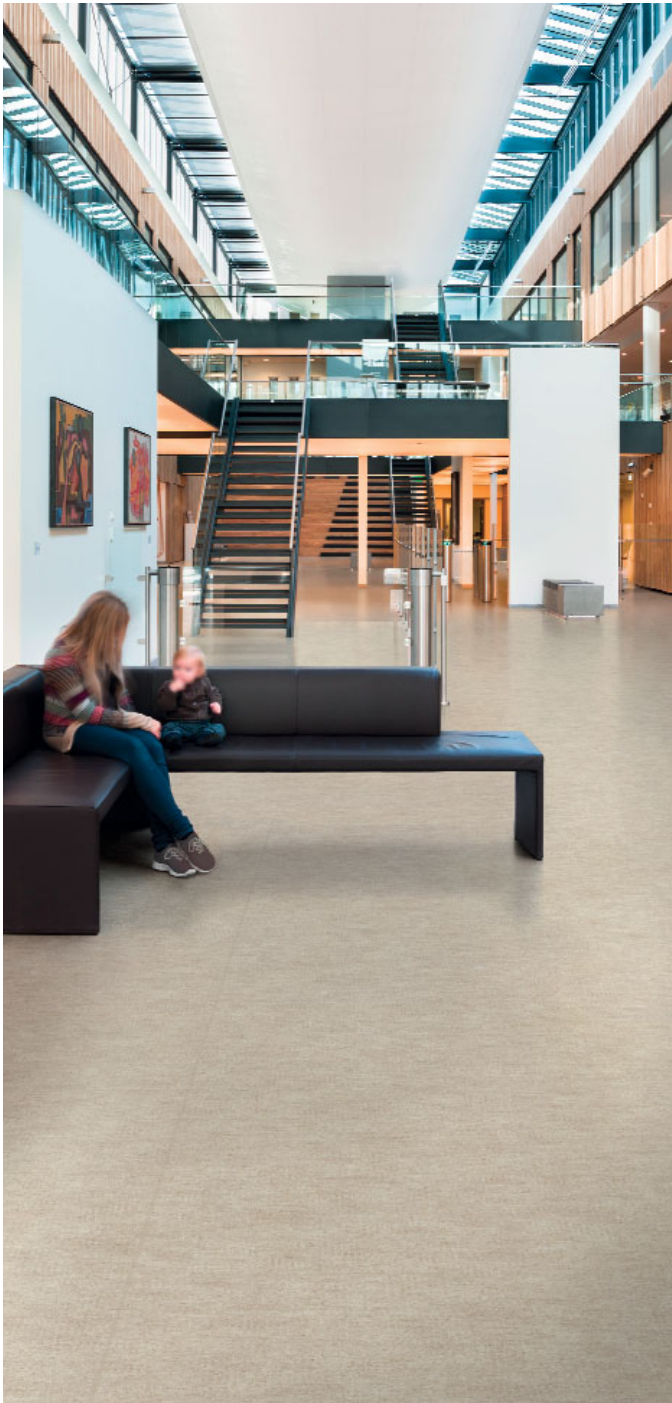

Sand Grain 5085

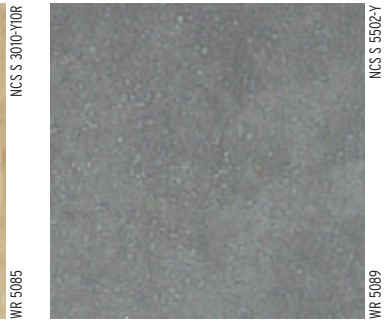

Dark Concrete 5089



Brushed Titanium 5086



Cement 5088



Frosted Silver 5084



Light Concrete 5087

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet



Polysafe Wood fx PUR

HEAVY-DUTY SAFETY FLOORING FEATURING SOPHISTICATED WOOD DESIGNS



plank w/l: 133 x 1000mm
WR 3237

Silver Oak 3357




plank w/l: 167 x 1500mm
WR 3330

Classic Oak 3107 WIDE PLANK DESIGN



plank w/l: 100 x 500mm
WR 3290

Vermont Maple 3097



plank w/l: 100 x 500mm
WR 3290

Warm Beech 3297




plank w/l: 100 x 1000mm
WR 3380

American Oak 3387




plank w/l: 84 x 332/664mm
WR 3330

Rustic Oak 3337




plank w/l: 100 x 500mm
WR 3300

Cherry 3307



plank w/l: 100 x 1000mm
WR 3340

European Oak 3347



plank w/l: 84 x 332/664mm
WR 3360

Mahogany 3367



plank w/l: 133 x 1000mm
WR 3990

Brazilian Walnut 3997

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.


Hardwearing safety floorcovering featuring authentic and contemporary wood designs.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



° Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Polysafe Vogue Ultra PUR


HEAVY-DUTY, DECORATIVE SAFETY FLOORING WITH MULTI-CHIP DESIGN




Snowstorm 4835




Whirlpool 4805




Toffee 4825




Galactic 4815




Bisque 4860




Oystershell 4800




Dune 4690




Meadow 4810




Nightsky 4760




Winter Dusk 4730




Woodland Grey 4770




Firestar 4790




Moonbeam 4780



Marine 4870



Steel Blue 4740



Forest Pine 4500

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


Polysafe Standard PUR

HEAVY-DUTY SAFETY FLOORING WITH A TRADITIONAL DECORATION

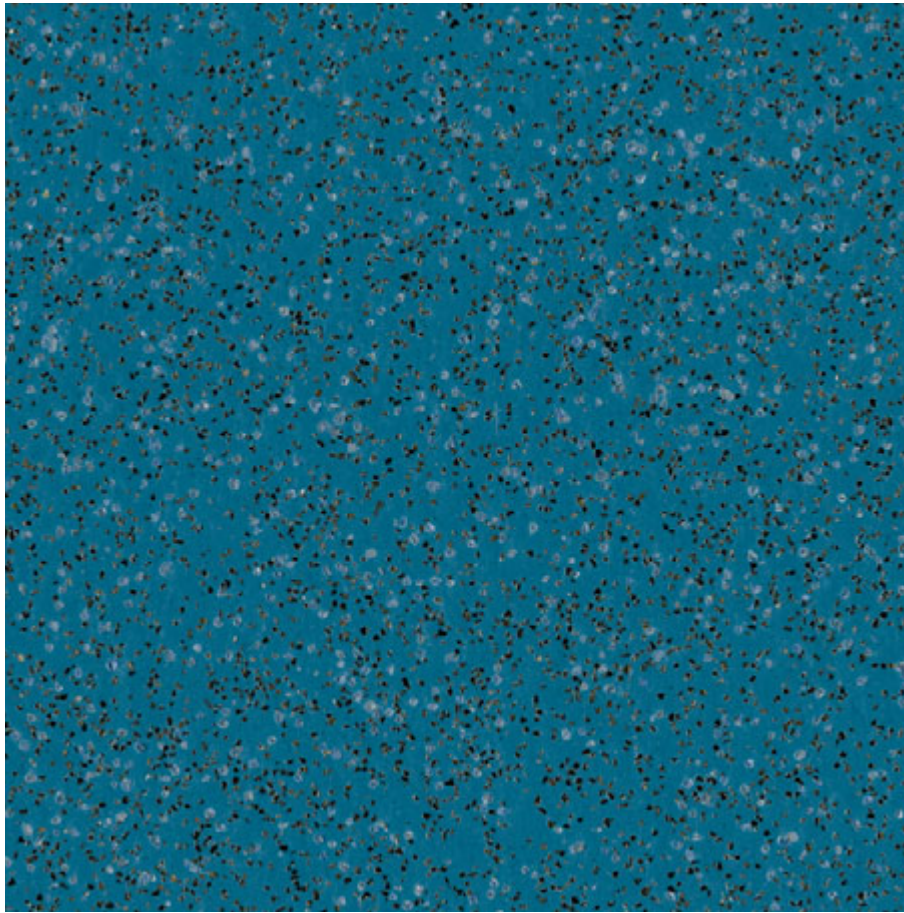


Cedar Blue 4060*

NCS S 5030-B
WR 9040




Ash Grey 4540

NCS S 3502-B
WR 2090




Cool Aqua 4570

NCS S 3020-B10G
WR 4570




Silver Birch 4020*

NCS S 4500-N
WR 9200




Arctic Blue 4130

NCS S 4020-B
WR 4130




Nordic Grey 4090

NCS S 5005-B20G
WR 8680




Lilac Blue 4580

NCS S 4020-R60B
WR 4580




Alpine Green 4110

NCS S 4010-G30Y
WR 4110




Storm Blue 4560

NCS S 5020-R80B
WR 4910




Elmwood 4520

NCS S 3010-Y60R
WR 9610




Autumn Beige 4140

NCS S 3010-Y30R
WR 4140




Maple Fawn 4030*

NCS S 4020-Y50R
WR 4030



Antique Copper 4120

NCS S 4040-Y80R
WR 4120




Twilight 4490

NCS S 7502-B
WR 4490



Black Walnut 4150

NCS S 6505-Y20R
WR 8640



Redwood 4040*

NCS S 3060-Y90R
WR 9230

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.


SPECIFICATIONS



GAUGE: 2.0mm, 2.5mm, 3.5mm*

AVAILABILITY: Sheet

* 4 colours are available ex-stock in 3.5mm.




* Refer to BRE Global ratings on www.greenbooklive.com




Polysafe Strata


HEAVY-DUTY SAFETY FLOORING WITH A MULTI-FLAKE DECORATION

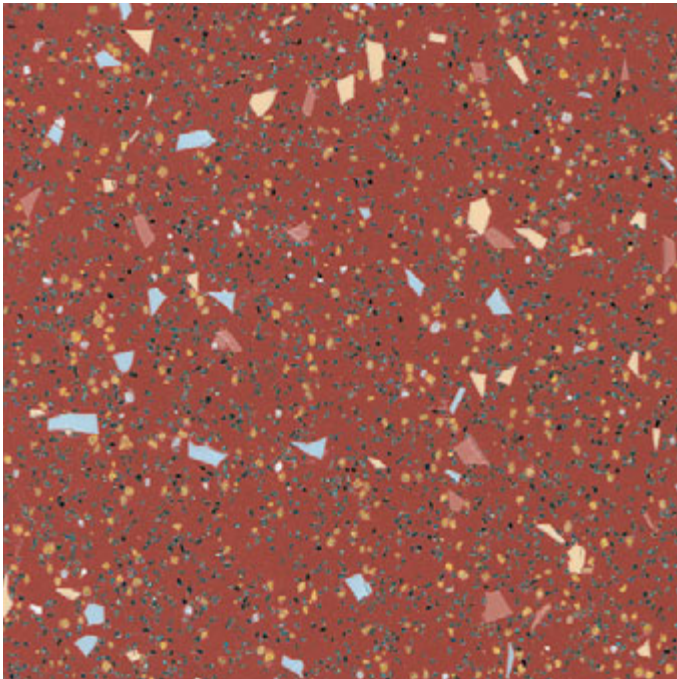


Marlstone 4630

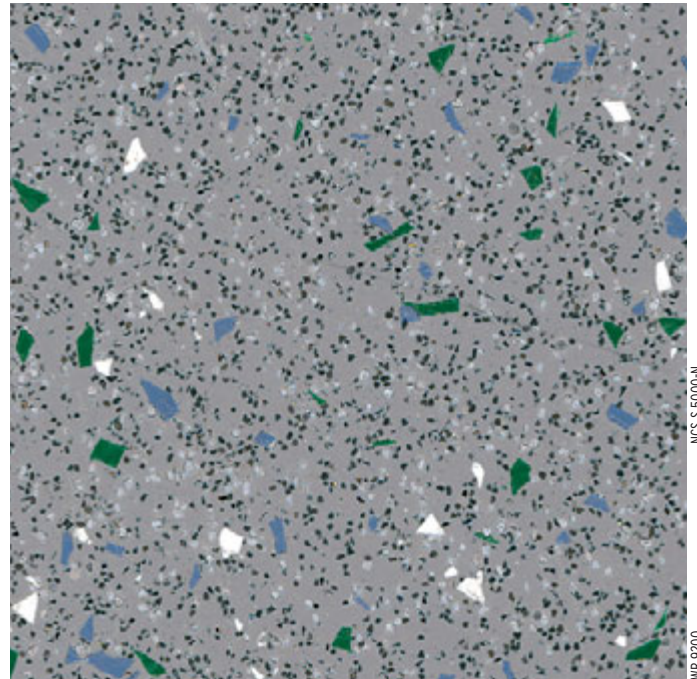


Bedrock 4170




Elvan Fawn 4180




Calcite Blue 4460




Feldspar 4620




Greenstone 4440



Arkose 4190



Deep Sapphire 4050



Black Opal 4080

KEY FEATURES

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).

SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Hydro


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

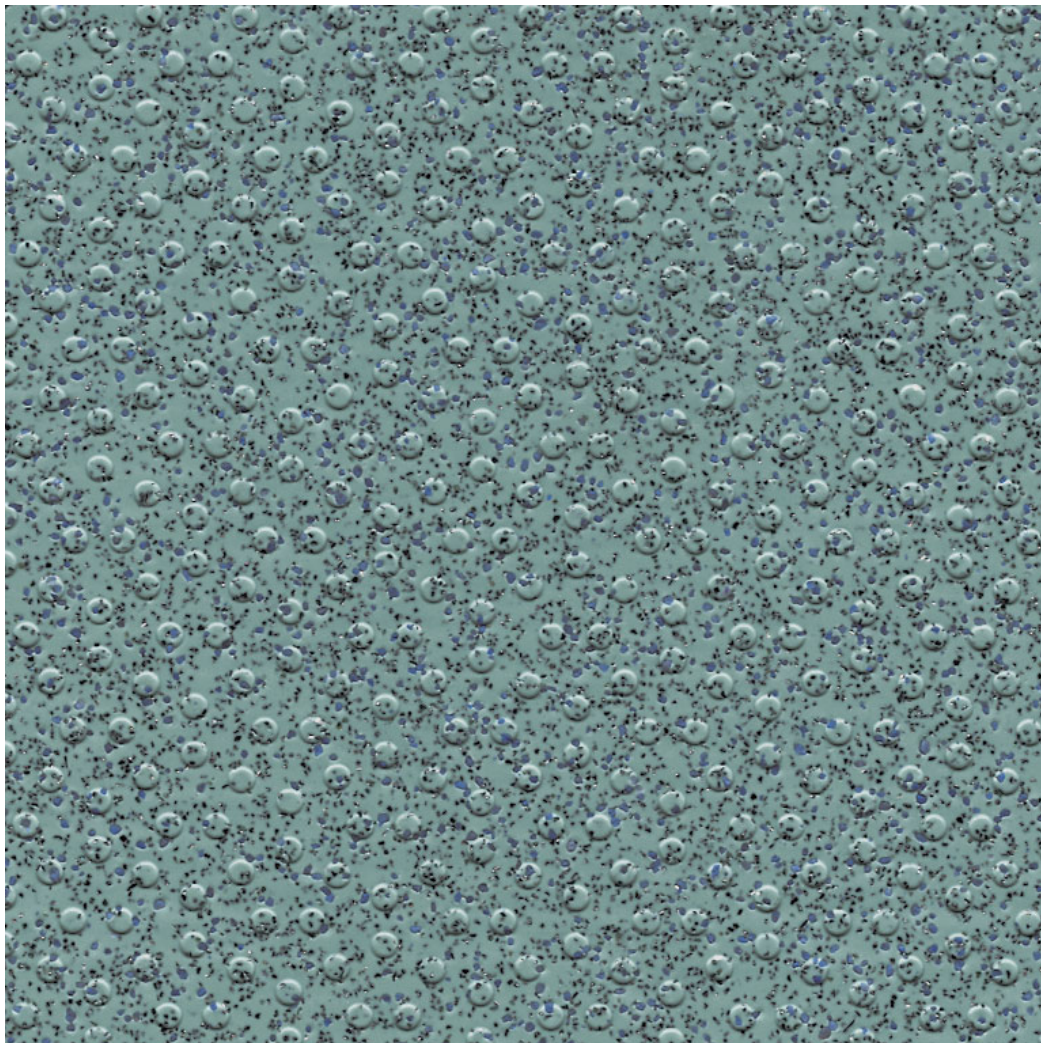


Sheared Slate H4960




Oystershell H4800




Bisque H4860




White Stone H4930




Blue Forge H4850



Marine H4870



Woodland Grey H4770



Tempered Steel H4940

KEY FEATURES

Designed for barefoot and continually wet areas.

Features raised pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.
 ≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm


AVAILABILITY: Sheet




° Refer to BRE Global ratings on www.greenbooklive.com

Polysafe Hydro Evolve


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT WET AREAS

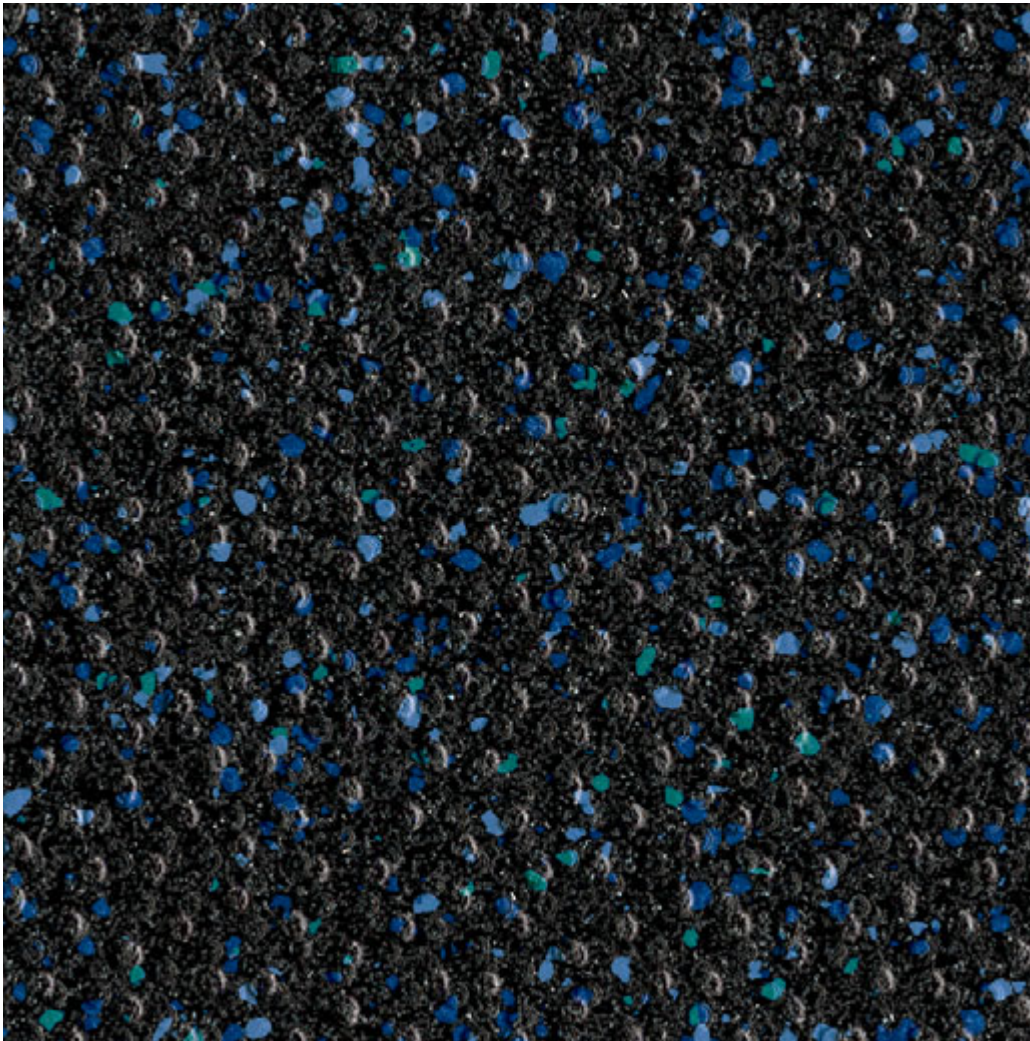


Black Volta 4255




Danube 4254




Amazon 4252




Indus 4251




Tigris 4257



Colorado 4253



Blue Nile 4256



Adriatic 4258

KEY FEATURES

- Designed for barefoot and continually wet areas.
- Features raised pimple emboss and carborundum-free safety aggregates.
- Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test).
- Conforms to EN 13845 50,000 cycles abrasion test.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet




† Refer to BRE Global ratings on www.thegreenguide.org.uk



Polysafe Ultima


SAFETY FLOORING WITH A MULTI-CHIP DECORATION. DESIGNED FOR HEAVY USE AREAS WHICH REQUIRE ENHANCED SLIP RESISTANCE




Baltic Green 4350




Mortar 4360




Pearl Granite 4330



Aurora Grey 4290



Bluestone 4390



Iron Ore 4340

KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.

Ideal for high footfall areas, such as food preparation areas or busy commercial kitchens, with risks of oil and grease spillages. Can also be used in continually wet and barefoot areas.

Slip resistance is assured for the guaranteed life of the product. ≥ 40 (Pendulum wet test - 4S Rubber) and ≥ 36 (TRL Rubber) with a surface roughness of $Rz \geq 70\mu m$.

SPECIFICATIONS



GAUGE: 2.5mm

AVAILABILITY: Sheet

100% RECYCLABLE
CONTAINS RECYCLED MATERIAL



° Refer to BRE Global ratings on www.greenbooklive.com

Polysafe Wood fx Acoustix PUR

HEAVY-DUTY SAFETY FLOORING WITH ACOUSTIC PROPERTIES, FEATURING SOPHISTICATED WOOD DESIGNS



plank w/t: 133 x 1000mm
WR 3990

Brazilian Walnut 3992




plank w/t: 133 x 1000mm
WR 3237

Silver Oak 3352



plank w/t: 84 x 332/664mm
WR 3360

Mahogany 3362



plank w/t: 100 x 500mm
WR 3300

Cherry 3302




plank w/t: 100 x 500mm
WR 3290

Warm Beech 3292




plank w/t: 100 x 1000mm
WR 3380

American Oak 3382



plank w/t: 84 x 332/664mm
WR 3330

Rustic Oak 3332



plank w/t: 100 x 1000mm
WR 3340

European Oak 3342

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety floorcovering featuring authentic and contemporary wood designs.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

≥19dB impact sound reduction level to exceed Building Regulation Part E requirements.

Ergonomically designed for anti-fatigue benefits. Conforms to EN 651/EN ISO 11368.

SPECIFICATIONS




GAUGE: 3.7mm, wear layer 0.65mm

AVAILABILITY: Sheet


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




Apple Mint 4628




Chicory 4625




Starflower 4627




Tuscan Blue 4626




Iris 4629




Santolina 4631




Anise Grey 4632




Blackseed 4633




Allspice 4622



Cassia 4621



Caraway 4623



Mace 4624

KEY FEATURES

Incorporates complementary coloured quartz and silicon carbide particles, to improve traction and safety underfoot.

All the Polyflor XL hallmarks, now engineered as a safety range.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.


≥36 (Pendulum wet test - 4S Rubber/Slider 96).

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet



Forest fx PUR

HARDWEARING COMMERCIAL WOOD EFFECT SHEET VINYL FLOORCOVERING



Vermont Maple 3090



Warm Beech 3290



American Oak 3380



Oiled Oak 2990 **WIDE PLANK DESIGN**



Rustic Oak 3330



European Oak 3340




Rich Cherry 3310



Classic Oak 3100 **WIDE PLANK DESIGN**




Stained Maple 3110




Smoked Oak 3150 **WIDE PLANK DESIGN**




Classic Walnut 3230 **WIDE PLANK DESIGN**



French Walnut 3120 **WIDE PLANK DESIGN**



Mahogany 3360



Brazilian Walnut 3990

KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering.

Highly realistic wood designs in a choice of 14 shades.

Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 649 / EN ISO 10582.


SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



° Refer to BRE Global ratings on www.greenbooklive.com



Acoustix Forest fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



plank w/l: 84 x 332/664mm
WR 3330

Rustic Oak 3335



plank w/l: 167 x 1500mm
WR 2990

Oiled Oak 3095

WIDE PLANK DESIGN



plank w/l: 100 x 500mm
WR 3290

Warm Beech 3295



plank w/l: 100 x 1000mm
WR 3380

American Oak 3385



plank w/l: 167 x 1500mm
WR 3330

Classic Oak 3125

WIDE PLANK DESIGN



plank w/l: 167 x 1500mm
WR 3150

Smoked Oak 3155

WIDE PLANK DESIGN



plank w/l: 100 x 1000mm
WR 3340

European Oak 3345



plank w/l: 167 x 1000mm
WR 3230

Classic Walnut 3235

WIDE PLANK DESIGN

KEY FEATURES

- Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.
- Choice of highly realistic and popular wood designs.
- Polyurethane reinforcement to facilitate a lifelong, low-cost, polish-free maintenance regime.
- Conforms to EN 651.


SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.65mm

AVAILABILITY: Sheet

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




Acoustix Gallery fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT NOISE SOUND REDUCTION OF 19dB




Vermont Maple 6837



Mercury 6840




Zinc 6841



Onyx 6842




American Oak 6815



Silica Sand 6843




Mica Sand 6844




Earth 6845




Rustic Oak 6836



Euclase Green 6846



Celestine Blue 6847



Lazulite Blue 6848



European Oak 6835



Stained Maple 6838

KEY FEATURES

Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.

Choice of highly realistic wood and micro-granite designs.

Polyurethane reinforcement to facilitate a lifelong, low-cost polish-free maintenance regime

Conforms to EN 651.


SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.6mm

AVAILABILITY: Sheet

This range includes highly realistic replications of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.



° Refer to BRE Global ratings on www.greenbooklive.com



Secura PUR


HARDWEARING DOMESTIC AND LIGHT COMMERCIAL LUXURY VINYL SHEET



Natural Oak 2126
1000 x 200mm




Alabaster Elm 2123
1000 X 166mm



Aspen 2124
1000 x 100mm




Norwegian Maple 2125
1000 x 80mm




Blond Oak 2127
1500 x 200mm



Golden Oak 2128
1000/500 x 62.5mm




Antique Herringbone 2129
710 x 140mm




Country Oak 2130
1500 x 200mm




Antique Oak 2131
1500 x 200mm



Sweet Chestnut 2132
1000 x 100mm



Black Walnut 2133
580/420 x 100mm



African Mahogany 2134
1000/500 x 62.5mm



Ebony 2135
1000 x 100/150mm

KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 653 / EN ISO 26986.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



Yorkstone 2110
500 x 333mm

R10



Limestone 2111
500 x 333mm

R10




Black Slate 2114
500 x 333mm

R10



Peakmoor Sandstone 2112
235 x 235mm

R10



Farmhouse Terracotta 2113
165 x 165mm

R10



Riviera Sands 2115

NCS S 2010-Y0R
R10



Riviera Taupe 2116

NCS S 1510-Y30R
R10



Riviera Bluebell 2117

NCS S 2502-Y
R10




Polished Concrete 2118

NCS S 4502-Y
R10



Grey Flagstone 2119
400 x 375mm

R10



Linear Ivory 2120

NCS S 1000-N
R10



Linear Fawn 2121

NCS S 2020-Y0R
R10



Linear Charcoal 2122

NCS S 7005-Y20R
R10

SPECIFICATIONS

The **R value**s shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.



GAUGE: 3.0mm, wear layer 0.35mm

AVAILABILITY: Sheet



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Expona Commercial PUR

ELEGANT WOOD COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



Beige Weathered Spruce 4074
203 x 1219mm




American Oak 4059
152 x 914mm



Light Classic Oak 4085
152 x 1219mm




Honey Classic Oak 4086
152 x 1219mm




Classic Oak 1902
101 x 914mm



Nut Tree 1907
101 x 914mm



Vintage Timber 4091
101 x 914mm



Light Pine 4061
152 x 1219mm



Honey Ash 4022
152 x 1219mm



Grey Ash 4020
152 x 1219mm



Beige Varnished Wood 4069
152 x 1219mm



Light Varnished Wood 4071
152 x 1219mm



Blue Varnished Wood 4070
152 x 1219mm



KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



Blond Limed Oak 4081
203 x 1219mm



Grey Limed Oak 4082
203 x 1219mm



Grey Pine 4063
152 x 1219mm



Brown Heritage Cherry 4065
184 x 1219mm



Dark Classic Oak 4088
152 x 1219mm



Brown Weathered Spruce 4072
203 x 1219mm



Red Heritage Cherry 4066
184 x 1219mm



Indian Ebony 1969
101 x 914mm



Blue Weathered Spruce 4073
203 x 1219mm



Brown Limed Oak 4084
203 x 1219mm



Dark Limed Oak 4083
203 x 1219mm



Graphite Pine 4062
152 x 1219mm




Blue Recycled Wood 4068
Mixed sizes



Dark Recycled Wood 4067
Mixed sizes



Weathered Country Plank 4019
152 x 914mm



Aged Elm 4036
152 x 914mm

4067 and 4068 feature mixed plank sizes: 76 x 914, 101 x 914, 152 x 914mm

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.55mm

AVAILABILITY: Plank: sizes as shown


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR

AUTHENTIC STONE AND EFFECTS COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS

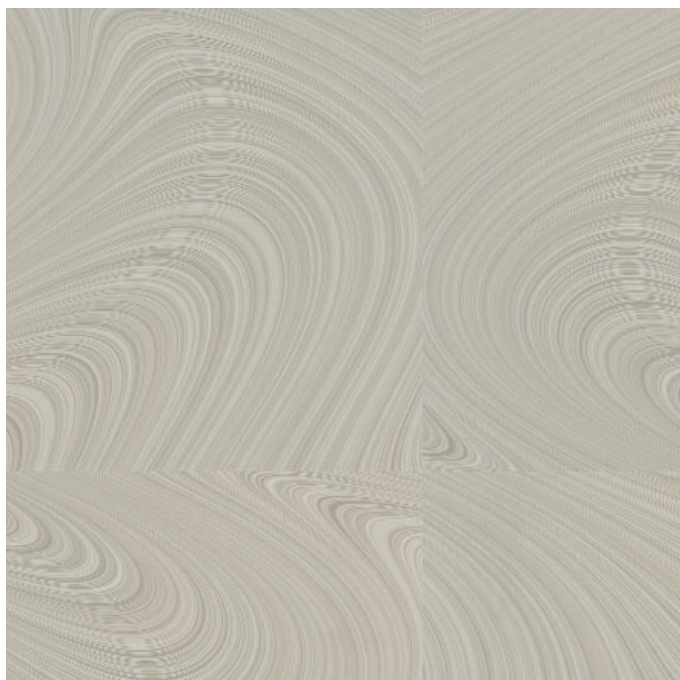

Crème Swirl 5048
457 x 457mm



Beige Travertine 5061
305 x 610mm




Classic Yorkstone 1992
457 x 457mm



Light Grey Travertine 5062
305 x 610mm




Exposed Concrete 5028
457 x 457mm




Green Swirl 5047
457 x 457mm



Birch Trunk 4077
305 x 914mm




Dark Grey Travertine 5063
305 x 610mm



Cambrian Stone 1993
457 x 457mm



Grey Plywood 4075
305 x 914mm



Brown Plywood 4076
305 x 914mm



Silver Slate 1921
457 x 457mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com



Light Grey Concrete 5067
610 x 610mm

R10



Cool Grey Concrete 5068
610 x 610mm

R10



Warm Grey Concrete 5064
610 x 610mm

R10



Dark Grey Concrete 5069
610 x 610mm

R10



Beige Brazilian Slate 5041
610 x 610mm

R10



White Brazilian Slate 5042
610 x 610mm

R10



Gold Brazilian Slate 5043
610 x 610mm

R10



Taupe Brazilian Slate 5044
610 x 610mm

R10



Crème Matrix 5076
610 x 610mm

R10



Light Grey Matrix 5074
610 x 610mm

R10




Mocca Matrix 5075
610 x 610mm

R10



Black Matrix 5071
610 x 610mm

R10



Nature Textile 5078
610 x 610mm

R10



Black Textile 5077
610 x 610mm

R10

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



GAUGE: 2.5mm, wear layer 0.55mm

AVAILABILITY: Tile: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Design PUR

ELEGANT WOOD AND AUTHENTIC STONE AND EFFECTS COLLECTION FOR VERY HEAVY COMMERCIAL APPLICATIONS



White Oak 6185
152 x 914mm



American Oak 6139
152 x 914mm



Blond Country Plank 6151
152 x 914mm



Classic Oak 6138
152 x 914mm



Light Elm 6182
152 x 914mm



Blond Indian Apple 6173
152 x 1219mm



Amber Classic Oak 6222
152 x 1219mm



Natural Brushed Oak 6179
203 x 1219mm




Silvered Driftwood 6146
203 x 1219mm




Aged Indian Apple 6174
152 x 1219mm



Antique Oak 6149
203 x 1219mm



Walnut 6155
152 x 914mm



Dark Brushed Oak 6178
203 x 1219mm



Grey Heritage Cherry 6204
184 x 1219mm



Black Elm 6183
152 x 914mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

* Refer to BRE Global ratings on www.greenbooklive.com



Classic Limestone 7173
305 x 610mm

R10



Roman Limestone 7219
305 x 610mm

R10



Crème Matrix 8077
610 x 610mm

R10



Warm Grey Concrete 7233
610 x 610mm

R10




Cool Grey Concrete 7237
610 x 610mm

R10




Light Contour 7214
305 x 914mm

R10



Dark Grey Concrete 7238
610 x 610mm

R10




Black Treadplate 8122
457 x 914mm

R10



Mocca Matrix 8076
610 x 610mm

R10




Dark Contour 7215
305 x 914mm

R10




Silver Slate 7155
305 x 610mm

R10



Atlantic Slate 7154
305 x 610mm

R10



Black Slate 7153
305 x 610mm

R10

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 3.0mm, wear layer 0.7mm

AVAILABILITY: Tile: sizes as shown




This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.


Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Control PUR


LUXURY VINYL TILES WITH SUSTAINABLE WET SLIP RESISTANCE




American Oak 6500
152 x 914mm




White Oak 6505
152 x 914mm




Blond Country Plank 6501
152 x 914mm




Light Elm 6506
152 x 914mm



Nut Tree 6502
152 x 914mm



Weathered Country Plank 6504
152 x 914mm



Classic Oak 6503
152 x 914mm



KEY FEATURES

The first EN 13845 sustainable slip resistant LVT in the World.

Featuring a polyurethane reinforcement to assist ongoing maintenance, offering cost saving of up to 60%.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).


Conforms to EN 13845 50,000 cycles abrasion test.



100% RECYCLABLE

40% RECYCLED MATERIAL


† Refer to BRE Global ratings on www.thegreenguide.org.uk



Portland Stone 7500
457 x 457mm




Classic Yorkstone 7502
457 x 457mm



Classic Limestone 7501
457 x 457mm



Cambrian Stone 7507
305 x 610mm



Smoked Limestone 7503
457 x 457mm



Warm Grey Concrete 7504
457 x 457mm



Roman Limestone 7506
305 x 610mm

SPECIFICATIONS




GAUGE: 2.5mm, wear layer 0.7mm

AVAILABILITY: Tile & Plank: sizes as shown


Bevel Line PUR

COLLECTION OF BEVELLED WOOD AND STONE DESIGNS DEVELOPED FOR VERY HEAVY COMMERCIAL PROJECTS

WOOD

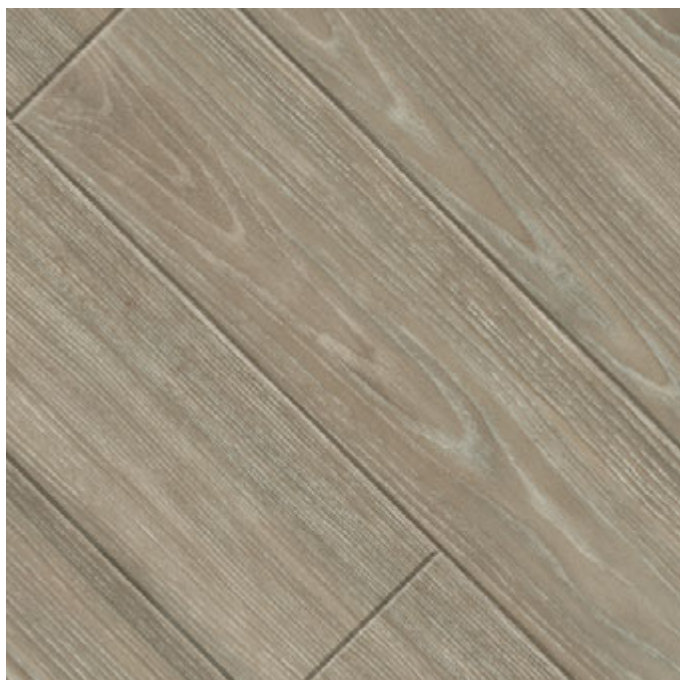


Grey Ash 1998
101 x 914mm

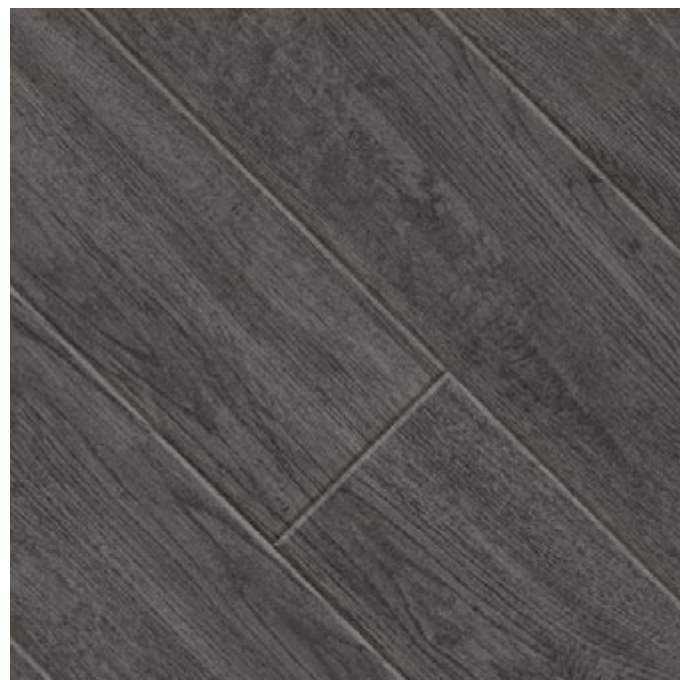


Smoked Chestnut 1999
101 x 914mm




Maple 1972
101 x 914mm




Beech 1973
101 x 914mm




American Oak 1974
101 x 914mm




Light Oak 1971
101 x 914mm




Rich Oak 1975
101 x 914mm



French Nut Tree 1976
101 x 914mm



Merbau 1977
101 x 914mm



Mahogany 1978
101 x 914mm



KEY FEATURES

Luxury vinyl tile range featuring authentic and popular wood and stone designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



100% RECYCLABLE
40% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com

STONE



Sandstone 1984
457 x 457mm



R10



Smoked Limestone 1985
457 x 457mm




R10



Ivory Stone 1980
457 x 457mm



R10



Portland Stone 1981
457 x 457mm



R10



Shellstone 1982
457 x 457mm




R10



Limestone 1983
457 x 457mm




R10



Brushed Concrete 1986
457 x 457mm




R10



Wet Concrete 1987
457 x 457mm



R10



Burnt Sandstone 1988
457 x 457mm



R10



Black Limestone 1989
457 x 457mm



R10

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges.



These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.7mm

AVAILABILITY: Tile & Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Camaro PUR

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE, SLATE AND MARBLE DESIGN TILES FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS


WOOD



Ambrosia Maple 2231
101 x 914mm




American Oak 2217
101 x 914mm



Waxed Pine 2206
101 x 914mm



Nut Tree 2202
101 x 914mm



Natural Oak 2232
152 x 1219mm



Vintage Timber 2220
152 x 914mm



Classic Oak 2216
101 x 914mm



Warwick Oak 2235
101 x 914mm




White Limed Oak 2229
152 x 914mm



Smoke Brushed Elm 2233
152 x 914mm



Figured Pine 2234
152 x 1219mm



North American Walnut 2236
152 x 914mm



Country Teak 2238
152 x 914mm



Roasted Oak 2237
152 x 1219mm



Heritage Oak 2239
203 x 1219mm

KEY FEATURES

Luxury vinyl plank and tile collection featuring creative and authentic wood and stone designs.

Accurate timber variation, grain and knots are sympathetically represented.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649/EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com

STONE



White Oilshale 2331
305 x 305mm

R10



White Metalstone 2332
305 x 610mm

R10



Portico Limestone 2334
305 x 610mm

R11



Ivory Stone 2333
457 x 457mm

R10



Classic Limestone 2335
457 x 457mm

R10



Travertine 2304
305 x 610mm

R10



Classic Yorkstone 2336
303 x 305mm

R11



Crema Slate 2318
305 x 610mm

R10



Romano Stone 2301
305 x 305mm

R10



Serpentine 2337
305 x 305mm

R11



Aged Metalstone 2338
305 x 610mm

R11




Ocean Slate 2319
305 x 610mm

R10



Atlantic Slate 2339
305 x 305mm

R10



Black Oilshale 2340
305 x 305mm

R10



Black Marble 2317
305 x 305mm

R10

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges



GAUGE: 2.0mm, wear layer 0.3mm

AVAILABILITY: Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Colonia PUR

COLLECTION OF AUTHENTIC WOOD AND STONE DESIGNS FOR RESIDENTIAL APPLICATIONS

WOOD




RIO

English Oak 4435
152 x 1219mm




RIO

Kings Oak 4437
184 x 1219mm



RIO

Woodland Oak 4411
101 x 914mm




RIO

Schoolhouse Oak 4434
152 x 1219mm



RIO

Oxford Maple 4431
152 x 914mm



RIO

Virginia Walnut 4432
152 x 914mm



RIO

Nordic White Oak 4436
184 x 1219mm



RIO

New England Elm 4433
152 x 1219mm



RIO

Mountain Alder 4401
101 x 914mm



RIO

Golden Koa 4403
101 x 914mm

KEY FEATURES

Collection of luxury vinyl tiles inspired by natural wood and stone materials for residential applications.

Shades and textures can be combined to create stunning floor designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product

Conforms to EN 649/EN ISO 10582.



100% RECYCLABLE

40% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com

STONE




Welsh Raven Slate 4535
305 x 610mm



Natural Limestone 4536
457 x 457mm



Imperial Black Marble 4515
305 x 305mm



Quarried Millstone 4532
305 x 305mm



Fossil Limestone 4537
457 x 457mm



Cottage Yorkstone 4531
305 x 305mm



Balmoral Grey Slate 4534
305 x 610mm



Glazed Metalstone 4533
305 x 610mm

SPECIFICATIONS

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges



GAUGE: 2.0mm, wear layer 0.2mm

AVAILABILITY: Tile & Plank: sizes as shown

This range includes highly realistic replications of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS

WOOD



R10

EF 93069


Grey Country Oak 2506



R10

EF 93089


Blond Country Oak 2507



R10

EF 93130


American Oak 2503



R10

EF 93130


Natural Oak 2502



R10

EF 93111


Light Cherry 2501



R10

EF 93148


Rich Oak 2500



R10

EF 93148

Dark Country Oak 2505



R10

EF 93040

Rich Walnut 2504



KEY FEATURES

A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.

Authentic replications of wood, stone and textile effects.

Polyurethane reinforcement provides an excellent foundation for an on going cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10582.



These items feature a bevelled edge.



100% RECYCLABLE & REUSABLE
20% RECYCLED MATERIAL



STONE & TEXTILE




Limed Concrete 2540



Black Concrete 2541



Champagne Limestone 2542

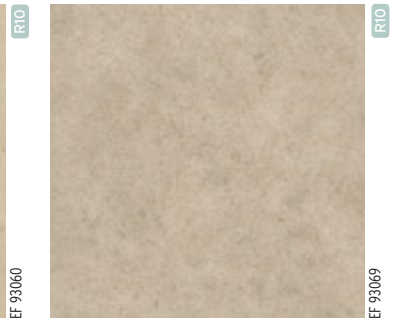

Jerusalem Limestone 2543



Cathedral Limestone 2544



Ground Limestone 2545



Porcelain Weave 2546



Charcoal Weave 2547

EF = expansion filler

The **R values** shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control or the Polysafe ranges

SPECIFICATIONS



GAUGE: 5.0mm, wear layer 0.7mm

AVAILABILITY: Wood planks: 177.8 x 1219.2mm
Stone & textile tiles: 457.2 x 457.2mm

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


LVT Design Accessories

INDIVIDUAL FLOOR CONCEPTS DEVELOPED FROM A VARIETY OF DESIGN ACCESSORIES.
THE FOLLOWING INFORMATION PROVIDES DETAILS OF AVAILABLE PRODUCTS.



Expona Design PUR and Expona Commercial PUR

Each of these collections have been compiled so the planks and tiles can be combined within the same installation. Collections can not be mixed. The brochure displays many exciting installation ideas along with a selection of Grouting, Marquetry & Feature Strips, to offer further scope for creativity. Refer to the brochure or log onto www.polyflor.com to view the online version.

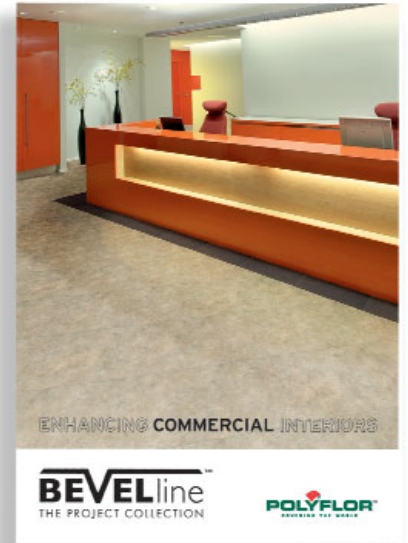

Bevel Line PUR

Standard borders and inlay designs are not offered with the Bevel Line collection as it is recommended to always feature bevelled edges against each other for aesthetic and performance benefits. A selection of Feature Strips, Grouting Strips & Marquetry Strips are readily available for use with tiles and planks to create natural grout and ships decking effects. Refer to the Bevel Line product brochure for further details of colours of strips available or log onto www.polyflor.com to view the online version.




Expona Control PUR

As the tiles and planks in this collection feature an aggregate within the wear layer, it is not recommended to produce bespoke cut floor designs, to ensure the edges remain straight and true. Creative inlay strips are offered to produce more installations options, or products can be inlaid together to create zonal floor areas. Refer to the brochure or log onto www.polyflor.com to view the online version.

Colonia PUR

The Colonia collection of residential luxury vinyl tiles features a wide range of high-design planks and tiles. These are supported by a tailored range of design accessories including Grouting, Marquetry and Feature Strips along with a wide range of design floor ideas. For full details on the collection, refer to the new 124 page product brochure or log onto www.polyflor.com to view the online version.

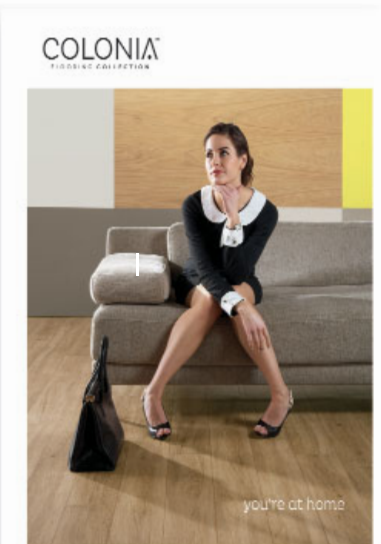

Camaro PUR

The Camaro collection of residential and light commercial luxury vinyl tiles features a wide range of high-design planks and tiles. These are supported by a tailored range of design accessories including Grouting, Marquetry and Feature Strips along with a wide range of design floor ideas. For full details on the collection, refer to the new 104 page product brochure or log onto www.polyflor.com to view the online version.



SD Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION



POLYFLOR SD



Ocean Blue 5050


NCS S 3005-R80B
WR 5550



Golden Sand 5070


NCS S 3020-Y10R
WR 2500

FINESSE SD



Cascade 5800

NCS S 3010-R80B
WR 5200



Lodestone 5830

NCS S 4000-N
WR 3140




Flaxen 5060

NCS S 1010-Y30R
WR 5330



Teal 5080

NCS S 4010-B70G
WR 2610




Woodglade 5840

NCS S 3005-G20Y
WR 5240



Moonscape 5860

NCS S 2005-Y40R
WR 5260



Steel Grey 5030

NCS S 4502-G
WR 9120



Silver Grey 5110

NCS S 2500-N
WR 2090



Daybreak 5820

NCS S 2500-N
WR 3130



KEY FEATURES

- High-performance, homogeneous floorcoverings with static dissipative properties.
- Choice of marbled or non-directional decoration.
- Conforms to a broad range of ESD standards.
- Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 608 x 608 mm



100% RECYCLABLE
25% RECYCLED MATERIAL



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

EC Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION




FINESSE EC



Corn Husk 5330

NCS S 2005+160R
WR 5330

POLYFLOR EC



Black/Grey 8990


NCS S 7502-B
WR 8640

CONDUCTIVE ROF*




Black 5980

NCS S 8502-R
WR 8640




Birchwood 5360

NCS S 1002+190R
WR 0630




Silver Leaf 5320

NCS S 2000+11
WR 5320



Water Ripple 5350

NCS S 3010-B
WR 5350



Hedgerow 5370

NCS S 3010+020Y
WR 5370


KEY FEATURES

High-performance, homogeneous floorcoverings with electrostatic conductive properties.

Conforms to a broad range of ESD standards.

Conforms to EN 649 / EN ISO 10581.

* ROF option is intended for explosive handling areas. It does not offer protection from a short circuit on a 240/250 volt mains, so installation and switching in these rooms are critical and must be considered, prior to any handover.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Tile: 608 x 608 mm

* ROF - Available in sheet only

Polyclad Pro and Plus PU



TOUGH, DURABLE AND FLEXIBLE VINYL WALL AND CEILING CLADDING FEATURING THE PROTECTION OF A POLYURETHANE SURFACE TREATMENT

POLYCLAD PRO PU



White Chalk 4093

NCS S 0603-G80Y
WR 4093



Frosted Grey 4094

NCS S 1502-Y50R
WR 4094



Biscuit Beige 4092

NCS S 1505-Y40R
WR 4092



Blue Shingle 4097

NCS S 1005-R90B
WR 4097



Grey Steel 4095

NCS S 2500-N
WR 4095



Dusted Blue 4096

NCS S 0907-B20G
WR 4096

POLYCLAD PLUS PU



Summer Sky 2830

NCS S 1500-B80G
WR 4430



Spring Fern 2810

NCS S 1000-G30Y
WR 4420



Frosted Cream 2800

NCS S 0907-Y10R
WR 3880



Nimbus Grey 2710

NCS S 1505-Y60R
WR 0630



Polar Ice 2840

NCS S 0603-Y40R
WR 9520



Dove White 2700

NCS S 0603-Y40R
WR 2700

KEY FEATURES

Wall and ceiling cladding sheet featuring a subtle marbled decoration.

Polyurethane surface treatment provides benefits in terms of hygiene and ease of maintenance.


Designed to be welded to Polyflor floorcoverings, to provide a floor-to-wall surface that provides an excellent barrier to dirt and infection.

Ideal for wet and hygiene-critical areas.

SPECIFICATIONS

GAUGE: Polyclad Pro PU 1.25mm
Polyclad Plus PU 2.0mm

AVAILABILITY: Sheet



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polyflor Sport

HARDWEARING VINYL SPORTSFLOOR DESIGNED FOR USE IN 'MULTI-PURPOSE' INDOOR SPORTS ARENAS




Maple 7516



Green 7515



Blue 7512

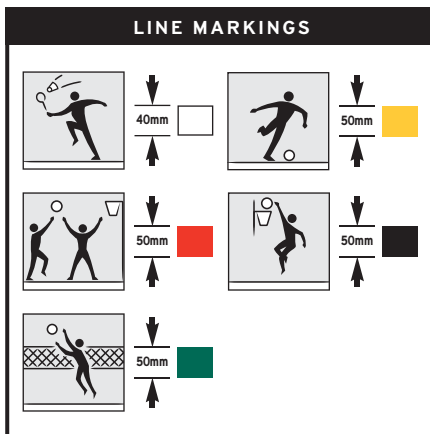

KEY FEATURES

High performance vinyl sheet sports flooring conforming to EN 14904.

Designed to perform safely and effectively in 'multi-purpose' indoor sports venues.

Suitable for basketball, netball, volleyball, gymnastics, badminton, handball, indoor football, martial arts and others.

SPECIFICATIONS

GAUGE: 6.7mm


AVAILABILITY: Sheet 2m x 18.5m

Note, standard sheet length is now 18.5m.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




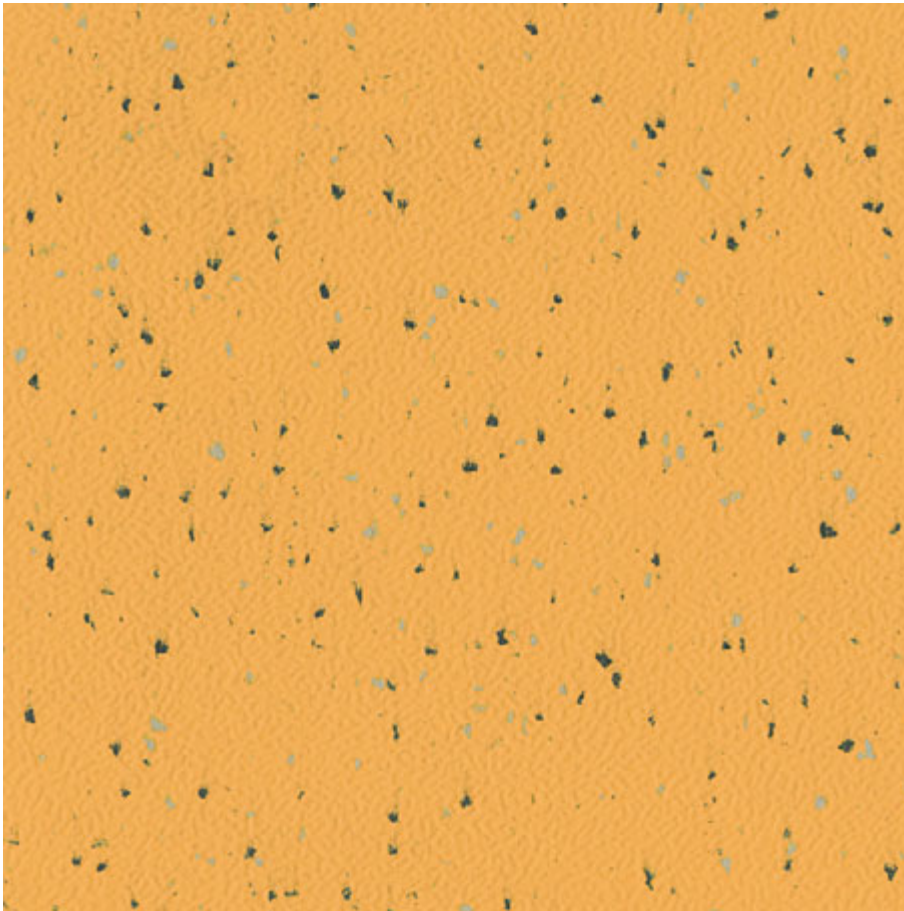


Mustard 503




Almond 206




Cotton 313




Rice 203




Pepper 306




Mocha 205




Raisin 307




Molasses 210




Apricot 607



Lentil 408




Sea Salt 213




Blue Poppy 702




Water Lily 707



Blue Vervain 713



Tomato 611



Water Melon 413

KEY FEATURES

Hardwearing rubber sheet floorcovering designed for heavy traffic commercial areas.

Multi-coloured chip decoration with embossed surface finish.

Inherent sound deadening properties and cigarette burn resistance.

Conforms to EN 1817: 1998.

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet

Noppe Stud Tile

COMMERCIAL RUBBER STUD TILE




Group 1



Steel 014*



Limestone Green 013*



Green Baize 015



Deep Blue 191*



Anthracite 102*



Black Coal 101*

Group 2



Sandstone 140



Orange 010



Warm Red 012



Mercury 129



Cool Blue 707*



Cobalt 019

KEY FEATURES

Hardwearing commercial rubber floor tile.

Low-profile studded surface.


Conforms to EN 12199: 1998.

Resistant to cigarette burns.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS




GAUGE: 3.0mm, 4.0mm

AVAILABILITY: Tile: 500 x 500mm

All shades are available in 3.0mm. *Also available in 4.0mm






Blue 9650




Light Fawn 9590



White 9520




Light Beige 9610



Fawn 9580




Beige 9600



Brown 9560



Russet 9620




Dark Brown 9570



Green 9640



Cream 9630



Light Grey 9550



Grey 9540





Dark Grey 9530



Black 9510

PRODUCT	CODE	GAUGE/SIZE	UNIT LENGTH	STANDARD PACK	EX-STOCK COLOURS
SIT-ON COVING	MC8	20 x 100 mm	2 metres	20 x 2 metres	15 colours
	MC14	20 x 75 mm	2 metres	20 x 2 metres	15 colours
SET-IN COVING	MC18	50 x 100 mm	2 metres	20 x 2 metres	15 colours
COILED SKIRTING	MC8c SIT-ON	20 x 100 mm	20 metres	2 x 20 metres coil*	15 colours
	MC18c SET-IN	50 x 100 mm	20 metres	2 x 20 metres coil*	15 colours
COVE FORMER	CF 20mm	20 x 20 mm	2 metres	30 x 2 metres	Black only
	CF 38mm	38 x 38 mm	2 metres	15 x 2 metres	Black only
CAPPING STRIP	CS-N	40 mm	2 metres	40 x 2 metres	15 colours
	CS-NC	40 mm	20 metres coil	20 metres coil*	15 colours
	CS	20 mm	20 metres coil	20 metres coil*	Black only
	CT	41 mm	2 metres	50 x 2 metres	White only
CORNER CAP	EFA 75	75 x 75 mm	2 metres	10 x 2 metres	Black only
WELDING ROD			100 metres coil	100 metres coil*	Colours to match vinyl sheet flooring



Special colours subject to a minimum order of 500 linear metres (excludes CS, CT, EFA 75, CF) *Supplied in standard packs only.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
2000 PUR	8000	Brushed Ochre	22.6	Bevel Line Wood PUR	1972	Maple	38.0	Classic Mystique PUR	1460	Shoreline	54.9
2000 PUR	8050	Stream	35.0	Bevel Line Wood PUR	1973	Beech	31.4				
2000 PUR	8150	Shadow	12.1	Bevel Line Wood PUR	1974	American Oak	31.8	Colonia Stone PUR	4515	Imperial Black Marble	5.7
2000 PUR	8230	Stonewall	29.4	Bevel Line Wood PUR	1975	Rich Oak	18.6	Colonia Stone PUR	4531	Cottage Yorkstone	44.3
2000 PUR	8300	Oak	54.1	Bevel Line Wood PUR	1976	French Nut Tree	17.4	Colonia Stone PUR	4532	Quarried Millstone	16.1
2000 PUR	8350	Larkspur	26.9	Bevel Line Wood PUR	1977	Merbau	8.1	Colonia Stone PUR	4533	Glazed Metalstone	33.2
2000 PUR	8380	Willowbank	29.4	Bevel Line Wood PUR	1978	Mahogany	7.6	Colonia Stone PUR	4534	Balmoral Grey Stone	39.4
2000 PUR	8400	Sequoia	16.3	Bevel Line Wood PUR	1998	Grey Ash	27.8	Colonia Stone PUR	4535	Welsh Raven Slate	39.6
2000 PUR	8450	Glacier Blue	42.4	Bevel Line Wood PUR	1999	Smoked Chestnut	14.1	Colonia Stone PUR	4536	Natural Limestone	51.2
2000 PUR	8490	Saffron	40.8					Colonia Stone PUR	4537	Fossil Limestone	39.4
2000 PUR	8500	Lace Blue	47.0	Camaro Stone & Design PUR	2301	Romano Stone	26.5	Colonia Wood PUR	4401	Mountain Alder	22.6
2000 PUR	8550	Sapphire	21.1	Camaro Stone & Design PUR	2304	Travertine	39.4	Colonia Wood PUR	4403	Golden Koa	28.4
2000 PUR	8600	Thistle	18.2	Camaro Stone & Design PUR	2317	Black Marble	7.2	Colonia Wood PUR	4411	Woodland Oak	23.2
2000 PUR	8650	Wild Lilac	51.2	Camaro Stone & Design PUR	2318	Cream Slate	44.5	Colonia Wood PUR	4431	Oxford Maple	27.6
2000 PUR	8700	Mint Crest	44.8	Camaro Stone & Design PUR	2319	Ocean Slate	23.0	Colonia Wood PUR	4432	Virginia Walnut	12.2
2000 PUR	8750	Glenbeck	23.7	Camaro Stone & Design PUR	2331	White Oilshale	67.2	Colonia Wood PUR	4433	New England Elm	43.2
2000 PUR	8800	Dawn Mist	60.0	Camaro Stone & Design PUR	2332	White Metalstone	56.6	Colonia Wood PUR	4434	Schoolhouse Oak	20.6
2000 PUR	8850	Buckwheat	39.2	Camaro Stone & Design PUR	2333	Ivory Stone	54.3	Colonia Wood PUR	4435	English Oak	25.4
2000 PUR	8900	Blossom	51.5	Camaro Stone & Design PUR	2334	Portico Limestone	54.4	Colonia Wood PUR	4436	Nordic White Oak	51.5
2000 PUR	8950	Rosehip	36.8	Camaro Stone & Design PUR	2335	Classic Limestone	51.6	Colonia Wood PUR	4437	Kings Oak	8.8
				Camaro Stone & Design PUR	2336	Classic Yorkstone	46.2				
Acoustix Forest fx	3095	Oiled Oak	34.8	Camaro Stone & Design PUR	2337	Sepentine	15.5	EC	8990	Black	8.4
Acoustix Forest fx	3125	Classic Oak	29.6	Camaro Stone & Design PUR	2338	Aged Metalstone	14.5				
Acoustix Forest fx	3155	Smoked Oak	14.2	Camaro Stone & Design PUR	2339	Atlantic Slate	8.3	Ecomax	4621	Cassia	41.1
Acoustix Forest fx	3235	Classic Walnut	13.4	Camaro Stone & Design PUR	2340	Black Oilshale	13.1	Ecomax	4622	Allspice	36.5
Acoustix Forest fx	3295	Warm Beech	34.0	Camaro Wood PUR	2202	Nut Tree	29.3	Ecomax	4623	Caraway	29.6
Acoustix Forest fx	3335	Rustic Oak	25.1	Camaro Wood PUR	2206	Waxed Pine	31.6	Ecomax	4624	Mace	25.5
Acoustix Forest fx	3345	European Oak	20.3	Camaro Wood PUR	2216	Classic Oak	15.1	Ecomax	4625	Chicory	36.5
Acoustix Forest fx	3385	American Oak	33.2	Camaro Wood PUR	2217	American Oak	33.6	Ecomax	4626	Tuscan Blue	22.1
				Camaro Wood PUR	2220	Vintage Timber	16.7	Ecomax	4627	Starflower	19.7
Acoustix Gallery fx	6815	American Oak	34.7	Camaro Wood PUR	2229	White Limed Oak	50.2	Ecomax	4628	Apple Mint	30.7
Acoustix Gallery fx	6835	European Oak	23.6	Camaro Wood PUR	2231	Ambrosia Maple	37.4	Ecomax	4629	Iris	37.1
Acoustix Gallery fx	6836	Rustic Oak	29.2	Camaro Wood PUR	2232	Natural Oak	22.0	Ecomax	4631	Santolina	41.1
Acoustix Gallery fx	6837	Vermont Maple	34.7	Camaro Wood PUR	2233	Smoke Brushed Elm	24.6	Ecomax	4632	Anise Grey	25.4
Acoustix Gallery fx	6838	Stained Maple	12.0	Camaro Wood PUR	2234	Figured Pine	13.7	Ecomax	4633	Blackseed	5.6
Acoustix Gallery fx	6840	Mercury	48.3	Camaro Wood PUR	2235	Warwick Oak	14.7				
Acoustix Gallery fx	6841	Zinc	37.2	Camaro Wood PUR	2236	North American Walnut	8.9	Ejecta Accessories	9510	Black	4.3
Acoustix Gallery fx	6842	Onyx	13.7	Camaro Wood PUR	2237	Roasted Oak	7.2	Ejecta Accessories	9520	White	79.2
Acoustix Gallery fx	6843	Silica Sand	53.0	Camaro Wood PUR	2238	Country Teak	9.2	Ejecta Accessories	9530	Dark Grey	23.0
Acoustix Gallery fx	6844	Mica Sand	39.3	Camaro Wood PUR	2239	Heritage Oak	7.5	Ejecta Accessories	9540	Grey	28.6
Acoustix Gallery fx	6845	Earth	28.2					Ejecta Accessories	9550	Light Grey	46.5
Acoustix Gallery fx	6846	Euclase Green	45.1	Classic Mystique PUR	1160	Smokestone	28.4	Ejecta Accessories	9560	Brown	23.6
Acoustix Gallery fx	6847	Celestine Blue	40.7	Classic Mystique PUR	1200	Pale Slate	47.0	Ejecta Accessories	9570	Dark Brown	8.1
Acoustix Gallery fx	6848	Lazulite Blue	15.4	Classic Mystique PUR	1210	Cloudburst	31.8	Ejecta Accessories	9580	Fawn	37.0
				Classic Mystique PUR	1220	Delta Blue	11.0	Ejecta Accessories	9590	Light Fawn	53.3
Bevel Line Stone PUR	1980	Ivory Stone	53.6	Classic Mystique PUR	1230	Wild Mint	43.6	Ejecta Accessories	9600	Beige	28.5
Bevel Line Stone PUR	1981	Portland Stone	51.4	Classic Mystique PUR	1240	Cornbrook	52.4	Ejecta Accessories	9610	Light Beige	41.7
Bevel Line Stone PUR	1982	Shellstone	45.8	Classic Mystique PUR	1250	Coral Drift	19.3	Ejecta Accessories	9620	Russet	17.9
Bevel Line Stone PUR	1983	Limestone	47.7	Classic Mystique PUR	1260	Sunblaze	13.5	Ejecta Accessories	9630	Cream	43.5
Bevel Line Stone PUR	1984	Sandstone	56.7	Classic Mystique PUR	1320	Asparagus	37.3	Ejecta Accessories	9640	Green	22.5
Bevel Line Stone PUR	1985	Smoked Limestone	51.5	Classic Mystique PUR	1330	Mountain Lake	28.1	Ejecta Accessories	9650	Blue	28.9
Bevel Line Stone PUR	1986	Brushed Concrete	45.9	Classic Mystique PUR	1370	Satinwood	55.2				
Bevel Line Stone PUR	1987	Wet Concrete	34.6	Classic Mystique PUR	1380	Nocturne	12.9	Expona Design Wood PUR	6138	Classic Oak	21.6
Bevel Line Stone PUR	1988	Burnt Sandstone	16.9	Classic Mystique PUR	1400	Quartz	50.3	Expona Design Wood PUR	6139	American Oak	32.4
Bevel Line Stone PUR	1989	Black Limestone	13.7	Classic Mystique PUR	1410	Ladoga	46.1	Expona Design Wood PUR	6146	Silvered Driftwood	18.6
Bevel Line Wood PUR	1971	Light Oak	36.8	Classic Mystique PUR	1430	Silver Mist	61.8	Expona Design Wood PUR	6149	Antique Oak	16.1

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Polyclad Plus PU	2700	Dove White	71.7	Polysafe Astral PUR	4250	Polaris	15.5	Polysafe Mosaic PUR	4105	Grey Fusion	38.5
Polyclad Plus PU	2710	Nimbus Grey	70.2	Polysafe Astral PUR	4260	Solstice	40.7	Polysafe Mosaic PUR	4115	Pearlite	54.6
Polyclad Plus PU	2800	Frosted Cream	65.7	Polysafe Astral PUR	4270	Vega Green	27.4	Polysafe Mosaic PUR	4125	Akoya	41.1
Polyclad Plus PU	2810	Spring Fern	62.2	Polysafe Astral PUR	4280	Orion Beige	35.9	Polysafe Mosaic PUR	4135	Orient Grey	22.5
Polyclad Plus PU	2830	Summer Sky	60.6	Polysafe Astral PUR	4300	Starburst	25.7	Polysafe Mosaic PUR	4145	Freshwater	25.1
Polyclad Plus PU	2840	Polar Ice	73.0	Polysafe Astral PUR	4310	Red Sky	13.9	Polysafe Mosaic PUR	4155	Earthstone	38.7
				Polysafe Astral PUR	4370	North Star	51.6	Polysafe Mosaic PUR	4165	Graphite Pearl	17.6
Polyflex Plus	6010	Snowdrop	69.7	Polysafe Astral PUR	4380	Isis	28.6	Polysafe Mosaic PUR	4175	South Sea	18.9
Polyflex Plus	6040	Black Tulip	5.1	Polysafe Astral PUR	4400	Sculptor	32.8	Polysafe Mosaic PUR	4185	Sunstone	24.2
Polyflex Plus	6060	Magnolia	37.1	Polysafe Astral PUR	4410	Sunspot	19.8	Polysafe Mosaic PUR	4195	Green Opal	34.4
Polyflex Plus	6130	Pearl Grey	32.9					Polysafe Standard PUR	4020	Silver Birch	26.7
Polyflex Plus	6180	Walnut	11.2	Polysafe Corona PUR	5470	Drystone	48.8	Polysafe Standard PUR	4030	Maple Fawn	27.3
Polyflex Plus	6300	Dark Brown	7.5	Polysafe Corona PUR	5480	Mango	33.4	Polysafe Standard PUR	4040	Redwood	12.1
Polyflex Plus	7010	Cotswold Green	29.9	Polysafe Corona PUR	5490	Seawater	14.9	Polysafe Standard PUR	4060	Cedar Blue	13.9
Polyflex Plus	7030	Pennine Fawn	38.2	Polysafe Corona PUR	5500	Barley	42.0	Polysafe Standard PUR	4090	Nordic Grey	23.6
Polyflex Plus	7040	Brecon Beige	32.3	Polysafe Corona PUR	5510	Bluebell	23.3	Polysafe Standard PUR	4110	Alpine Green	27.1
Polyflex Plus	7060	Firth Grey	25.5	Polysafe Corona PUR	5520	Tulip	20.1	Polysafe Standard PUR	4120	Antique Copper	17.8
Polyflex Plus	7080	Avon Sand	36.6	Polysafe Corona PUR	5530	Otter	22.8	Polysafe Standard PUR	4130	Arctic Blue	25.2
Polyflex Plus	7100	Cambrian Bronze	26.0	Polysafe Corona PUR	5540	Grasshopper	37.0	Polysafe Standard PUR	4140	Autumn Beige	38.9
Polyflex Plus	7110	Border Grey	50.0	Polysafe Corona PUR	5550	Pacific	32.7	Polysafe Standard PUR	4150	Black Walnut	6.3
Polyflex Plus	7310	Mourne Grey	35.0	Polysafe Corona PUR	5560	Blackbird	11.1	Polysafe Standard PUR	4490	Twilight	9.8
Polyflex Plus	7320	Lomond Grey	30.7	Polysafe Corona PUR	5570	Seal	37.7	Polysafe Standard PUR	4520	Elmwood	38.8
Polyflex Plus	7330	Dover Grey	58.3	Polysafe Corona PUR	5580	Geyser	29.5	Polysafe Standard PUR	4540	Ash Grey	36.9
Polyflex Plus	7340	Romney Green	44.5					Polysafe Standard PUR	4560	Storm Blue	15.3
Polyflex Plus	7350	Lakeland Blue	25.6	Polysafe Hydro	H4770	Woodland Grey	27.5	Polysafe Standard PUR	4570	Cool Aqua	34.9
Polyflex Plus	7360	Mendip Mauve	46.8	Polysafe Hydro	H4800	Oystershell	34.4	Polysafe Standard PUR	4580	Lilac Blue	22.8
Polyflex Plus	7370	Cornish Cream	47.9	Polysafe Hydro	H4850	Blue Forge	9.2				
Polyflex Plus	7380	Anglian Red	20.1	Polysafe Hydro	H4860	Bisque	45.6	Polysafe Strata	4050	Deep Sapphire	14.1
Polyflex Plus	7390	Wensley Beige	47.6	Polysafe Hydro	H4870	Marine	18.5	Polysafe Strata	4080	Black Opal	8.8
Polyflex Plus	7400	Durham Fawn	46.7	Polysafe Hydro	H4930	White Stone	43.8	Polysafe Strata	4170	Bedrock	25.9
Polyflex Plus	7410	Jersey Tan	33.9	Polysafe Hydro	H4940	Tempered Steel	25.0	Polysafe Strata	4180	Elvan Fawn	27.9
Polyflex Plus	7420	Arran Beige	58.4	Polysafe Hydro	H4960	Sheared Slate	26.2	Polysafe Strata	4190	Arkose	37.9
								Polysafe Strata	4440	Greenstone	25.9
Polyflor Conductive R0F	5980	Black	4.9	Polysafe Hydro Evolve	4251	Indus	58.3	Polysafe Strata	4460	Calcite Blue	23.4
				Polysafe Hydro Evolve	4252	Amazon	59.3	Polysafe Strata	4620	Feldspar	35.4
Polyflor Sport	7512	Blue	15.0	Polysafe Hydro Evolve	4253	Colorado	44.2	Polysafe Strata	4630	Marlstone	16.9
Polyflor Sport	7515	Green	18.0	Polysafe Hydro Evolve	4254	Danube	42.2				
Polyflor Sport	7516	Maple	36.9	Polysafe Hydro Evolve	4255	Black Volta	6.4	Polysafe Ultima	4290	Aurora Grey	14.6
				Polysafe Hydro Evolve	4256	Blue Nile	33.7	Polysafe Ultima	4330	Pearl Granite	18.7
Polysafe Arena PUR	5081	Linen	45.6	Polysafe Hydro Evolve	4257	Tigris	27.7	Polysafe Ultima	4340	Iron Ore	12.4
Polysafe Arena PUR	5082	Steelwool	21.9	Polysafe Hydro Evolve	4258	Adriatic	27.2	Polysafe Ultima	4350	Baltic Green	22.6
Polysafe Arena PUR	5083	Chambray	33.5					Polysafe Ultima	4360	Mortar	22.9
Polysafe Arena PUR	5084	Frosted Silver	63.2	Polysafe Modena PUR	4042	Grey Fluorite	47.5	Polysafe Ultima	4390	Bluestone	14.2
Polysafe Arena PUR	5085	Sand Grain	45.3	Polysafe Modena PUR	4043	Agate Grey	38.3				
Polysafe Arena PUR	5086	Brushed Titanium	13.7	Polysafe Modena PUR	4044	Gypsum	49.5	Polysafe Vogue Ultra PUR	4500	Forest Pine	24.4
Polysafe Arena PUR	5087	Light Concrete	33.3	Polysafe Modena PUR	4045	Jetstone	14.7	Polysafe Vogue Ultra PUR	4690	Dune	27.9
Polysafe Arena PUR	5088	Cement	41.9	Polysafe Modena PUR	4046	Copal	39.4	Polysafe Vogue Ultra PUR	4730	Winter Dusk	22.9
Polysafe Arena PUR	5089	Dark Concrete	23.2	Polysafe Modena PUR	4047	Galena	27.2	Polysafe Vogue Ultra PUR	4740	Steel Blue	14.4
Polysafe Arena PUR	5090	Crema Nova	53.6	Polysafe Modena PUR	4048	Citrina	44.4	Polysafe Vogue Ultra PUR	4760	Nightsky	17.0
Polysafe Arena PUR	5091	Flagstone Grey	35.0	Polysafe Modena PUR	4049	Andesite	26.4	Polysafe Vogue Ultra PUR	4770	Woodland Grey	29.7
Polysafe Arena PUR	5092	Clay Stone	24.7	Polysafe Modena PUR	4051	Angelite	40.0	Polysafe Vogue Ultra PUR	4780	Moonbeam	21.4
				Polysafe Modena PUR	4052	Green Tourmaline	17.3	Polysafe Vogue Ultra PUR	4790	Firestar	15.9
Polysafe Astral PUR	4200	Nebula Blue	11.5	Polysafe Modena PUR	4053	Orange Calcite	23.8	Polysafe Vogue Ultra PUR	4800	Oystershell	40.9
Polysafe Astral PUR	4220	Aquarius	16.9	Polysafe Modena PUR	4054	Blue Quartz	16.9	Polysafe Vogue Ultra PUR	4810	Meadow	25.8
Polysafe Astral PUR	4230	Space Mauve	17.5	Polysafe Modena PUR	4055	Aventurine	44.9	Polysafe Vogue Ultra PUR	4860	Bisque	48.1
Polysafe Astral PUR	4240	Lunar Grey	11.7	Polysafe Modena PUR	4056	Garnet	14.7	Polysafe Vogue Ultra PUR	4870	Marine	22.3

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Polysafe Vogue Ultra PUR	4805	Whirlpool	37.0	Saarfloor Diamant	707	Water Lily	18.8	SimpLay Stone & Textile PUR	2546	Porcelain Weave	46.7
Polysafe Vogue Ultra PUR	4815	Galactic	5.5	Saarfloor Diamant	713	Blue Vervain	8.3	SimpLay Stone & Textile PUR	2547	Charcoal Weave	14.4
Polysafe Vogue Ultra PUR	4825	Toffee	30.4					SimpLay Wood PUR	2500	Rich Oak	14.8
Polysafe Vogue Ultra PUR	4835	Snowstorm	48.6	Saarfloor Noppe	010	Orange	21.9	SimpLay Wood PUR	2501	Light Cherry	25.7
				Saarfloor Noppe	012	Warm Red	11.8	SimpLay Wood PUR	2502	Natural Oak	25.0
Polysafe Wood fx PUR	3097	Vermont Maple	37.5	Saarfloor Noppe	013	Limestone Green	21.7	SimpLay Wood PUR	2503	American Oak	34.4
Polysafe Wood fx PUR	3107	Classic Oak	28.6	Saarfloor Noppe	014	Steel	21.3	SimpLay Wood PUR	2504	Rich Walnut	6.0
Polysafe Wood fx PUR	3297	Warm Beech	35.2	Saarfloor Noppe	015	Green Baize	7.6	SimpLay Wood PUR	2505	Dark Country Oak	11.4
Polysafe Wood fx PUR	3307	Cherry	29.4	Saarfloor Noppe	019	Cobalt	6.6	SimpLay Wood PUR	2506	Grey Country Oak	40.4
Polysafe Wood fx PUR	3337	Rustic Oak	25.8	Saarfloor Noppe	101	Black Coal	4.6	SimpLay Wood PUR	2507	Blond Country Oak	35.6
Polysafe Wood fx PUR	3347	European Oak	23.3	Saarfloor Noppe	102	Anthracite	10.3				
Polysafe Wood fx PUR	3357	Silver Oak	22.9	Saarfloor Noppe	129	Mercury	38.5	Standard XL	8580	Black Cherry	8.8
Polysafe Wood fx PUR	3367	Mahogany	10.8	Saarfloor Noppe	140	Sandstone	33.8	Standard XL	8640	Black Panther	5.5
Polysafe Wood fx PUR	3387	American Oak	37.2	Saarfloor Noppe	191	Deep Blue	7.3	Standard XL	9110	Mushroom	39.7
Polysafe Wood fx PUR	3997	Brazilian Walnut	8.3	Saarfloor Noppe	707	Cool Blue	17.8	Standard XL	9120	Graphite	27.5
								Standard XL	9170	Atlantic Blue	23.4
Polysafe Wood fx Acoustix PUR	3292	Warm Beech	35.2	SD	5030	Steel Grey	31.5	Standard XL	9200	Slate Grey	31.8
Polysafe Wood fx Acoustix PUR	3302	Cherry	29.4	SD	5050	Ocean Blue	41.4				
Polysafe Wood fx Acoustix PUR	3332	Rustic Oak	25.8	SD	5060	Flaxen	60.3	XL PU	3700	Pumice	53.9
Polysafe Wood fx Acoustix PUR	3342	European Oak	23.3	SD	5070	Golden Sand	42.9	XL PU	3710	Fossil	40.5
Polysafe Wood fx Acoustix PUR	3352	Silver Oak	22.9	SD	5080	Teal	29.8	XL PU	3720	Flint	25.4
Polysafe Wood fx Acoustix PUR	3362	Mahogany	10.8	SD	5110	Silver Grey	48.6	XL PU	3730	Blue Nickel	38.6
Polysafe Wood fx Acoustix PUR	3382	American Oak	37.2					XL PU	3740	Crystal Blue	37.8
Polysafe Wood fx Acoustix PUR	3992	Brazilian Walnut	8.3	Secura PUR	2110	Yorkstone	47.7	XL PU	3750	Tanzanite Blue	19.1
				Secura PUR	2111	Limestone	54.5	XL PU	3760	Blue Zircon	10.6
Prestige PUR	1600	Alabaster	56.7	Secura PUR	2112	Peakmoor Sandstone	56.6	XL PU	3770	Azure	26.0
Prestige PUR	1800	Pale Iris	38.6	Secura PUR	2113	Farmhouse Terracotta	20.0	XL PU	3800	Connemara Green	35.1
Prestige PUR	1830	Clove	32.6	Secura PUR	2114	Black Slate	8.0	XL PU	3810	Turquoise	30.8
Prestige PUR	1840	Stone Blue	28.9	Secura PUR	2115	Riviera Sands	53.0	XL PU	3830	Jade	14.1
Prestige PUR	1850	Cinnamon	48.7	Secura PUR	2116	Riviera Taupe	58.2	XL PU	3850	Ironstone	18.1
Prestige PUR	1860	Gingerlily	63.7	Secura PUR	2117	Riviera Bluebell	44.7	XL PU	3870	Rose Quartz	55.8
Prestige PUR	1870	Peppermint	56.2	Secura PUR	2118	Polished Concrete	22.9	XL PU	3880	Porcelain	58.1
Prestige PUR	1880	Chive	48.3	Secura PUR	2119	Grey Flagstone	14.4	XL PU	3890	Carnelian Beige	60.5
Prestige PUR	1890	Thyme	52.9	Secura PUR	2120	Linear Ivory	67.4	XL PU	3900	Sablee Beige	29.3
Prestige PUR	1900	Bilberry	25.1	Secura PUR	2121	Linear Fawn	46.6	XL PU	3910	Dolomite	41.1
Prestige PUR	1910	Nutmeg	58.2	Secura PUR	2122	Linear Charcoal	13.8	XL PU	3930	Citrine	45.8
Prestige PUR	1920	Lavender Mist	51.6	Secura PUR	2123	Alabaster Elm	53.0				
Prestige PUR	1930	Grey Marl	38.2	Secura PUR	2124	Aspen	62.3				
Prestige PUR	1940	Liquorice	11.8	Secura PUR	2125	Norwegian Maple	33.1				
Prestige PUR	1950	Ice Crystal	53.2	Secura PUR	2126	Natural Oak	31.9				
Prestige PUR	1960	Chilli	23.8	Secura PUR	2127	Blond Oak	42.3				
				Secura PUR	2128	Golden Oak	36.5				
Saarfloor Diamant	203	Rice	29.1	Secura PUR	2129	Antique Herringbone	20.2				
Saarfloor Diamant	205	Mocha	18.6	Secura PUR	2130	Country Oak	20.0				
Saarfloor Diamant	206	Almond	47.4	Secura PUR	2131	Antique Oak	7.7				
Saarfloor Diamant	210	Molasses	15.1	Secura PUR	2132	Sweet Chestnut	15.6				
Saarfloor Diamant	213	Sea Salt	39.5	Secura PUR	2133	Black Walnut	10.7				
Saarfloor Diamant	306	Pepper	47.6	Secura PUR	2134	African Mahogany	8.5				
Saarfloor Diamant	307	Raisin	31.0	Secura PUR	2135	Ebony	12.1				
Saarfloor Diamant	313	Cotton	59.2								
Saarfloor Diamant	408	Lentil	29.7	SimpLay Stone & Textile PUR	2540	Limed Concrete	47.0				
Saarfloor Diamant	413	Water Melon	13.6	SimpLay Stone & Textile PUR	2541	Black Concrete	11.5				
Saarfloor Diamant	503	Mustard	41.9	SimpLay Stone & Textile PUR	2542	Champagne Limestone	50.0				
Saarfloor Diamant	607	Apricot	28.3	SimpLay Stone & Textile PUR	2543	Jerusalem Limestone	43.2				
Saarfloor Diamant	611	Tomato	16.7	SimpLay Stone & Textile PUR	2544	Cathedral Limestone	35.2				
Saarfloor Diamant	702	Blue Poppy	25.6	SimpLay Stone & Textile PUR	2545	Ground Limestone	29.8				

All products tested in accordance with BS8300:2009

Product Specification

	PEARLAZZO PUR	PRESTIGE PUR	MYSTIQUE PUR	CLASSIC MYSTIQUE PUR	2000 PUR
Gauge	2mm	2mm	2mm	2mm	2mm, 2.5mm
Wear Layer	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ² 2m x 15m = 30m ²
Tile Size	–	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm*
Weight	2950g/m ²	3030g/m ²	3250g/m ²	3250g/m ²	2mm: 3550g/m ² 2.5mm: 4552g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	–	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	<450	<450	<450
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1*
EN 660-2 Abrasion Group EN ISO 10581	Group T Type I	Group P Type I	Group P Type I	Group P Type I	Group M Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product
AqBB	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+ rating	A+ rating	A+ rating	A+ rating	A+ rating
Hygiene	+	+	+	+	+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

* Tile size available in selected gauges – see tile availability table for more details.

* Certification available for 2mm only.

✦ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



EN ISO 10581

TILE AVAILABILITY AND COVERAGE	TILE SIZE	COVERAGE	TILES PER BOX
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflor SD, Finesse SD, Polyflor EC, Finesse EC	608 x 608mm	5.17m ²	14
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflex Plus PU 1.5/2.0mm	300 x 300mm	4.5m ²	50
2000 PUR 2.5mm, Polyflex Plus PU 2.5mm	300 x 300mm	3.6m ²	40
Noppe Stud Tile 3mm	500 x 500mm	5m ²	20
Noppe Stud Tile 4mm	500 x 500mm	4m ²	16

Product Specification

	XL PU	STANDARD XL	POLYFLEX PLUS PU
Gauge	1.5mm, 2mm	1.5mm, 2mm 2.5mm, 3mm	1.5mm, 2mm, 2.5mm
Roll Size	2m x 27.5m = 55m ² 2m x 20m = 40m ²	2m x 27.5m = 55m ² 2m x 20m = 40m ² 2m x 15m = 30m ² 2m x 13m = 26m ²	–
Tile Size	300 x 300mm* 608 x 608mm*	300 x 300mm* 608 x 608mm*	300 x 300mm
Weight	1.5mm: 2360g/m ² 2mm: 3200g/m ²	1.5mm: 2360g/m ² 2mm: 3200g/m ² 2.5mm: 4200g/m ² 3mm: 5010g/m ²	1.5mm: 2800g/m ² 2mm: 3800g/m ² 2.5mm: 4860g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms*
Use Area Classification	1.5mm: 23, 32, 41 2mm: 23, 34, 43	1.5mm: 23, 32, 41 2mm: 23, 34, 43 2.5mm: 23, 34, 43 3mm: 23, 34, 43	1.5mm: 23, 31 2mm: 23, 33, 42 2.5mm: 23, 34, 43
Agrément	1.5mm: ✓ 2mm: ✓	1.5mm: ✓ 2mm: ✓ 2.5mm: ✓ 3mm: ✓	–
ASTM F1913	Conforms	Conforms	–
ASTM F1700	Conforms	Conforms	–
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	<450	<450†	–
ASTM E648	Class 1	Class 1†	Class 1
EN 660-2 Abrasion Group EN ISO 10581	Group M Type II	Group M Type II	Group F Type III
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	–
FloorScore	Certified product	Certified product	–
AgBB	Pass	Pass	–
BRE Green Guide	A+ rating	A+ rating	A+ Generic
Hygiene	+	+	–
Maintenance Enhancement	Polyurethane surface treatment	–	Polyurethane surface treatment

† Certification available for 1.5mm and 2mm only.

• Tile size available in selected gauges – see tile availability table for more details.

* 40mm mandrel.

✦ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	CORONA PUR	ASTRAL PUR	MOSAIC PUR	MODENA PUR	ARENA PUR	WOOD FX PUR	VOGUE ULTRA PUR
Gauge	2mm	2mm	2mm	2mm	2mm	2mm	2mm
Wear Layer	–	–	0.7mm	0.7mm	0.7mm	0.7mm	–
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2400g/m ²	2450g/m ²	2400g/m ²	2780g/m ²	2780g/m ²	2780g/m ²	2400g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
CE Marking	DA0010	DA0009	DA0035	DA0053	DA0053	DA0053	DA0005
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
RRL Pendulum Test	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)*
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	R10	R10	R10	R10	R10
Indoor Air Comfort Gold	–	–	–	Approved	Approved	Approved	–
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AqBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+ Generic	A+ Generic	A+	A+
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR

* 4S Rubber/Slider 96. ▲ TRL/Slider 55.

✦ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	STANDARD PUR	STRATA	HYDRO	HYDRO EVOLVE	ULTIMA	WOOD FX ACOUSTIX PUR	ECOMAX
Gauge	2mm, 2.5mm, 3.5mm	2mm	2mm	2mm	2.5mm	3.7mm	2mm
Wear Layer	–	–	–	–	–	0.65mm	–
Roll Size	2m x 20m = 40m ² 2m x 15m = 30m ² *	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2mm: 2430g/m ² 2.5mm: 3100g/m ² 3.5mm: 4400g/m ²	2430g/m ²	2700g/m ²	2650g/m ²	3000g/m ²	3000g/m ²	3350g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	–	Conforms
EN 651 / EN ISO 11368	–	–	–	–	–	Conforms	–
CE Marking	DA0003	DA0004	DA0006	DA0052	DA0007	DA0054	–
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 42	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	–	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	–	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
EN ISO 10140-3 / EN ISO 140-8	–	–	–	–	–	≥19dB	–
RRL Pendulum Test	≥36 (wet test)*	≥36 (wet test)*	≥36 (wet test)▲*	≥36 (wet test)	≥40 (wet test)* ≥36 (wet test)▲	≥36 (wet test)*	≥36 (wet test)*
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥70µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	Class B	Class B	R11	R10	R10
Indoor Air Comfort Gold	–	–	–	–	–	Approved	–
FloorScore	Certified product	–	Certified product	Certified product	Certified product	Certified product	Certified product
AqBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+ Generic	A+	A+	A+ Generic
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	–	–	–	–	Polysafe™ PUR	–

* 3.5mm gauge.

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

⊕ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection



EN 651



EN 13845

Product Specification

	FOREST FX PUR	ACOUSTIX FOREST FX PUR	ACOUSTIX GALLERY FX PUR	SECURA PUR
Gauge	2mm	3.7mm	3.7mm	3.0mm
Wear Layer	0.7mm	0.65mm	0.6mm	0.35mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 25m = 50m ² 3m x 25m = 75m ² 4m x 25m = 100m ²
Weight	2700g/m ²	2800g/m ²	2800g/m ²	1780g/m ²
EN 649 / EN ISO 10582	Conforms	–	–	–
EN 651	–	Conforms	Conforms	–
EN 653 / EN ISO 26986	–	–	–	Conforms
Use Area Classification	23, 34, 43	23, 34, 42	23, 33, 42	23, 32, 41
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN ISO 10140-3 (EN ISO 140-8)	–	≥19dB	≥19dB	≥19dB
EN 433 Residual Indentation	<0.10mm	<0.2mm	<0.2mm	<0.2mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10
AS/NZS 4586	R10	–	–	R10
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product
AqBB	Very low emissions	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+	+
BRE Green Guide	A+	A+	A+	A Generic
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	EXPONA DESIGN PUR	EXPONA COMMERCIAL PUR	EXPONA CONTROL PUR
Gauge	3mm	2.5mm	2.5mm
Wear Layer	0.7mm	0.55mm	0.7mm
Plank Size: Wood (planks per box)	152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15) 203 x 1219mm (14)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15) 203 x 1219mm (14)	152 x 914mm (24)
Tile Size: Stone/Design (tiles per box)	305 x 610mm (18) 457 x 457mm (16) 305 x 914mm (12) 610 x 610mm (9)	305 x 610mm (18) 457 x 457mm (16) 305 x 914mm (12) 610 x 610mm (9)	305 x 610mm (18) 457 x 457mm (16)
Weight	5100g/m ²	4290g/m ²	4290g/m ²
EN 649/EN ISO 10582	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 33, 42	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	-	-	<450
ASTM E648	Class 1	Class 1	Class 1
EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class ES (wet)
RRL Pendulum Test	-	-	≥36 (wet test)
Surface Roughness Rz	-	-	≥20µm
DIN 51130	R10	R10	-
Responsible Sourcing BES 6001 SA 8000	Very Good Approved Factory	Very Good Approved Factory	Very Good Approved Factory
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	BEVEL LINE PUR	CAMARO PUR	COLONIA PUR	SIMPLAY PUR
Gauge	2.5mm	2mm	2mm	5mm
Wear Layer	0.7mm	0.3mm	0.2mm	0.7mm
Plank Size: Wood (planks per box)	101 x 914mm (36)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 203 x 1219mm (14)	101 x 914mm (36) 152 x 914mm (24) 152 x 1219mm (18) 184 x 1219mm (15)	178 x 1219mm (10)
Tile Size: Stone/Design (tiles per box)	457 x 457mm (16)	305 x 305mm (36) 305 x 610mm (18) 457 x 457mm (16)	305 x 305mm (36) 305 x 610mm (18) 457 x 457mm (16)	457 x 457mm (12)
Weight	4200g/m ²	3600g/m ²	3680g/m ²	8000g/m ²
EN 649/EN ISO 10582	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 31	22	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
ASTM E648	Class 1	-	-	Class 1
EN 649/EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10
Responsible Sourcing BES 6001 SA 8000	Very Good Approved Factory	Very Good Approved Factory	Very Good Approved Factory	- -
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement



EN ISO 10582

Product Specification

POLYFLOR SPORT	
Gauge	6.7mm
Roll Size	2m x 18.5m = 37m ²
Weight	Plain 4260g/m ² Maple 4510g/m ²
EN 14904	Conforms
EN 13501-1	Class Cfl-S1
EN ISO 9239-1	≥4.5kw/m ²
EN ISO 11925-2	Pass
EN 649 Abrasion Group	Group T
EN 13893	Class DS (dry)
Maintenance Enhancement	Polymer surface treatment

DIAMANT		NOPPE STUD TILE	
Gauge	2mm	3mm, 4mm	
Tile Size	–	500 x 500mm	
Roll Size	1.90m x 15m = 28.5m ²	–	
Weight	3200g/m ²	3mm: 4200g/m ² 4mm: 5600g/m ²	
EN 1817	Conforms	–	
EN 12199	–	Conforms	
Use Area Classification	23, 34, 42	3mm: 23, 32, 41 4mm: 23, 34, 43	
EN 13501-1	Class Bfl-S1	Class Cfl-S1	
EN ISO 9239-1	≥8kw/m ²	≥4.5kw/m ²	
EN ISO 11925-2	Pass	Pass	
EN 13893	Class DS (dry)	Class DS (dry)	



	SD	FINESSE SD	POLYFLOR EC	FINESSE EC	CONDUCTIVE ROF†
Gauge	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Tile Size	608 x 608mm	608 x 608mm	608 x 608mm	608 x 608mm	–
Weight	3400g/m ²	3030g/m ²	3500g/m ²	2900g/m ²	3300g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	34, 43	34, 43	34, 43	34, 43	34, 43
Agrément	✓	✓	–	–	–
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	–	<450	–
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
EN 649 Abrasion Group	Group M	Group P	Group M	Group P	Group M
EN ISO 10581	Type II	Type I	Type II	Type I	Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
IEC 61340-4-1 2003 R ₆	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	–
EN 1081 R ₁ /R ₂	<10 ⁹ ohms	<10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	<5 x 10 ⁴ ohms
ESD S 7.1	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	–
BRE Green Guide	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)
Hygiene	+	+	–	+	–

† Polyflor ROF flooring for explosive handling areas, no protection from short circuit on a 240/250 volt mains. All SD results require minimum 40% R.H.


+




Product Specification

	POLYCLAD PRO PU	POLYCLAD PLUS PU
Gauge	1.25mm	2mm
Roll Size	1.83m x 30m = 54.9m ²	2m x 20m = 40m ²
Weight	1900g/m ²	3530g/m ²
BS 476: Part 6	–	(I)<12 (i1)<6*
BS 476: Part 7	–	Class 1*
EN 13501-1	B-s2-d0	B-s3-d0
Hygiene	+	+
Maintenance Enhancement	Polyurethane surface treatment	Polyurethane surface treatment

* For details of how this result was achieved (eg. adhesive, plasterboard), contact Polyflor.

 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s2-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13 1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s3-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD



ENVIRONMENTALLY PREFERABLE FLOORING

At Polyflor, we strive to be an environmentally and economically sustainable business, recycling and reducing waste wherever possible and being as carbon neutral as possible. Choosing Environmentally Preferable Flooring from Polyflor means zero compromise in choice and the function of the product.

POLYFLOR'S ENVIRONMENTAL CREDENTIALS

- BRE A+ rating certification (ENP 415, ENP 429 & ENP 472) on 27 key ranges within homogeneous, heterogeneous, LVT and safety flooring categories
- EN 15804 EPDs verified by IBU
- ISO 14001 accreditation since 2000
- Member of the UK Green Building Council
- Fully support the Vinyl Plus commitment for 2020
- Active member of Epfloor and Recovinyl
- Co founding and funding member of Recofloor, the industry's nationwide take-back scheme
- Vinyl flooring is 100% recyclable
- Polyflor flooring can contain up to 40% recycled content
- 9,570 tonnes of post production waste recycled and 800 tonnes of post consumer waste recycled in 2013
- Reduction in dry waste of 82% in eleven years and 91% reduction in liquid waste when compared to 2000's figures
- Recycled water is 96% with just 4% coming from mains
- Pass international VOC emissions tests, including Indoor Air Comfort Gold, FloorScore, Afset and AgBB, with no negative contribution to indoor air quality
- Low odour compared to many other floorcoverings
- Up to 85% sustainable material
- Plasticisers used by Polyflor are not classified substances and do not need authorisation under REACH. A range of ortho-phthalates and non-phthalate alternatives used across Polyflor's vinyl collection.
- 20-25 year life span means fewer replacements over the life of a building, therefore less manufacturing, energy & materials
- Energy consumption in manufacture reduced by over 46% in the last 13 years
- Carbon emissions reduced by 18,426 tonnes since 2000
- Our claims are independently audited, certified and documented



BRE Global Generic Ratings

Where Polyflor products have not been individually certificated by BRE Global, generic ratings are available. These generic ratings apply to specific categories of flooring installed into defined use areas. Vinyl flooring achieves on average a generic BRE Global A+ rating across the categories shown below.



Standard	Homogeneous EN 649	Heterogeneous EN 649	Acoustic EN 651	LVT EN 649	Safety EN 13845	Rubber (smooth) EN 1817	Rubber (profiled) EN 12199	LVS EN 653
Health Element	A+ 821570038	A+ 821570039	A+ 821570053	A+ 821570054	A+ 821570055	A+ 821570056	A+ 821570057	-
Education Element	A+ 821570065	A+ 821570066	A+ 821570010	A+ 821570013	A+ 921570010	A+ 821570014	A+ 821570015	-
Commercial Element	A 821570038	A 821570039	A 821570041	A 821570042	A 821570043	A 821570044	A 821570045	-
Retail Element	A+/A+ 821570038	A+/A+ 821570039	A+/A 821570053	A+/A 821570054	A+/A 821570055	A+/A+ 821570056	A+/A+ 821570057	-
Domestic Element	A 821570065	A 821570066	A 821570010	A 821570013	B 921570010	A 821570014	A 821570015	A 821570002

Polyflor ranges not individually assessed can be included within the appropriate generic ratings:

Safety	Homogeneous	Rubber (smooth)	Rubber (profiled)	LVS	LVT
Modena PUR Hydro Evolve Ecomax Arena PUR Expona Control PUR	Polyflor SD Finesse SD Finesse EC Polyflor EC Polyflex Plus PU	Diamant	Noppe Stud Tile	Secura	SimpLay PUR

BRE Global Certification - individual ratings

Independent, third-party certification is always important as its impartiality reassures customers that our products will perform as expected. This is why Polyflor has had the majority of its product ranges individually assessed and rated by BRE Global. Each product certificated by BRE Global has undergone a 'cradle to grave' life cycle analysis (LCA), therefore scrutinising its environmental performance throughout every stage of its life. Generic ratings are a good guidance, but are based on European production averages, whereas individual certification ensures accuracy of LCA data specific to the product and manufacturer.

Polyflor's safety, homogeneous, heterogeneous and LVT ranges have been individually assessed by BRE Global to measure their environmental impact. The rating spans from A+ to E, with A+ being the best rating. A better rating helps to maximise a building's BREEAM score, which is achievable through our 25 A+ ratings.

The BRE Global rating scheme is categorised by end use areas, as the environmental impact in each can vary. The reason for this is that various products will be available in the different sectors, which are subject to a pre-determined spread of ratings across the categories A+ to E. Therefore more options may be available within the domestic sector, for example. Overall, Polyflor's certified ratings are impressive, particularly in the key areas of health and education, where BREEAM ratings are linked to government funding. For more information on our certification, visit www.greenbooklive.com and enter 'Polyflor' into the search box.

HOMOGENEOUS	Certificate	Health	Education	Retail (fashion)	Retail (durability)	Office	Domestic
Polysafe Astral PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Mosaic PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Corona PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Vogue Ultra PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Standard PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Wood fx PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Wood fx Acoustix PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Hydro	ENP472	A+	A+	A+	A+	A	A
Polysafe Strata	ENP472	A+	A+	A+	A+	A	A
Polysafe Ultima	ENP472	A+	A+	A+	A+	A	A
HOMOGENEOUS							
Pearlazzo PUR	ENP472	A+	A+	A+	A+	A	A
2000 PUR	ENP472	A+	A+	A+	A+	A	A
Classic Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Prestige PUR	ENP472	A+	A+	A+	A+	A	A
Standard XL	ENP472	A+	A+	A+	A+	A	A
XL PU	ENP472	A+	A+	A+	A+	A	A
HETEROGENEOUS							
Forest fx PUR	ENP415	A+	A+	A+	A+	A	A
Mineral fx PUR	ENP415	A+	A+	A+	A+	A	A
Acoustix Forest fx PUR	ENP415	A+	A+	A+	A	A	B
Acoustix Gallery fx PUR	ENP415	A+	A+	A+	A+	A	A
LVT							
Expona Commercial PUR	ENP429	A+	A+	A+	A+	A	B
Expona Design PUR	ENP429	A+	A+	A+	A	B	B
Bevel Line PUR	ENP429	A+	A+	A+	A	A	A
Camaro PUR	ENP429	*	*	A+	*	A	A
Colonia PUR	ENP429	*	*	*	*	*	A

* Product not suitable for use area and has therefore not been rated for the particular use area.

Flooring Collection



Homogeneous	2-3	Pearlazzo PUR	7	2000 PUR
	4	Prestige PUR	8	XL PU
	5	Mystique PUR	9	Standard XL
	6	Classic Mystique PUR		

Semi Flexible Tiles	10	Polyflex Plus PU
---------------------	----	------------------

Safety (Polysafe)	11	Corona PUR	21	Strata
	12	Astral PUR	22	Hydro
	13	Mosaic PUR	23	Hydro Evolve
	14-15	Modena PUR	24	Ultima
	16-17	Arena PUR	25	Wood fx Acoustix PUR
	18	Wood fx PUR	26	Ecomax
	19	Vogue Ultra PUR	38-39	Expona Control PUR
	20	Standard PUR		

Heterogeneous	27	Forest fx PUR	29	Acoustix Gallery fx PUR
	28	Acoustix Forest fx PUR	30-31	Secura PUR

Luxury Vinyl Tiles	32-35	Expona Commercial PUR	42-43	Camaro PUR
	36-37	Expona Design PUR	44-45	Colonia PUR
	38-39	Expona Control PUR	46-47	SimpLay PUR
	40-41	Bevel Line PUR	48	LVT Design Accessories

Loose Lay Tiles	46-47	SimpLay PUR
-----------------	-------	-------------

ESD	49	SD Collection
	50	EC Collection

Wall Cladding	51	Polyclad Pro PU
	51	Polyclad Plus PU

Sport	52	Polyflor Sport
-------	----	----------------

Rubber Flooring	53	Diamant
	54	Noppe Stud Tile

Flooring Accessories	55	Ejecta
----------------------	----	--------

Product Specifications	56-67
------------------------	-------

Acoustic	25	Wood fx Acoustix PUR
	28	Acoustix Forest fx PUR
	29	Acoustix Gallery fx PUR
	30-31	Secura PUR



POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: +61 3 9215 4400
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: anthonylam@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

New Zealand

Polyflor New Zealand
Tel: +64 9 269 1111
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

Russia

Polyflor Contract Ltd
Tel: +7 (812) 332 42 02
E-mail: info@polyflor.ru

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

United Arab Emirates

Polyflor Middle East
Tel: +971 4 349 1078
E-mail: espm@eim.ae

www.polyflor.com



POLYFLOR™ HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT:	+44 (0)161 767 1122	UK FAX:	+44 (0)161 767 1128	RECEPTION:	+44 (0)161 767 1111
UK SAMPLE REQUESTS:	+44 (0)161 767 2551	EXPORT FAX:	+44 (0)161 767 1166	E-MAIL:	INFO@POLYFLOR.COM
EXPORT SALES DIRECT:	+44 (0)161 767 1913	TECHNICAL SUPPORT:	+44 (0)161 767 1912	WEBSITE:	WWW.POLYFLOR.COM

