

COVEYA
COVEYA.CO.UK



**Specialist Conveyors for
Farming & Biomass**

Over the past 30 years
we've been proud to
work with...



BI@ Collectors



Evesham Vale
Growers



marches biogas



Pentland
BIOMASS



Sutton Hoo
Produce

ixora Energy



VEOLIA

Cargill



Stobart
Energy

blazersfuels



CEG

for
farmers
the total feed business



Coveya has built a reputation for excellence over the past 30 years and is now one of the most respected conveyor manufacturers and suppliers in the UK and worldwide. We also pride ourselves on offering the best in customer care, support, and training.

We have many years of experience within the Farming & Biomass supplying a range of conveyors to enable picking lines within arable farming production and the efficient processing and movement of animal feed to biomass, grains, seeds and other farming materials as well as woodchip, pellets, oversized materials, compostables and waste.

Regardless of the size or complexity of a site, we have a conveyor that will efficiently handle material movement, helping you to increase productivity and eliminate downtime.

Coveya conveyors are available for purchase and short, as well as long term hire and each system is supported by expert installation, maintenance, servicing, and parts.

T. 0800 915 9195

E. sales@coveya.co.uk

W. www.coveya.co.uk

 [linkedin.com/company/coveya](https://www.linkedin.com/company/coveya)

 [YouTube Coveya](https://www.youtube.com/Coveya)

Coveya Product Range

Product	Loose Material handling	Bulk Material handling	Material Sorting – Manual	Medium Duty Supports	Heavy Duty Supports	Height Adjustable Undercarriage	Belt Scrapers available	Side Guides available 150-600mm
Easikit™ 450 / EasiWheel 	✓			✓			✓	✓
Easikit™ 600 	✓			✓	✓		✓	✓
Easikit™ 900 	✓	✓	✓	✓	✓		✓	✓
Easikit™ 1200 	✓	✓	✓	✓	✓		✓	✓
Easikit™ 1500 	✓	✓	✓	✓	✓		✓	✓
Easikit™ Mobile 	✓	✓				✓	✓	✓
Easikit™ Radial 	✓	✓				✓	✓	✓
Screw Conveyor 	✓			✓				
Telescopic Veya 	✓					✓	✓	
HC1000 Monstaveya™ 		✓						✓
Bulk Feed Hopper FH510 		✓					✓	

Top Covers available	Variable Speed Controls	Hydraulic Controls	In Stock	Built to Order	Service Package Available	Capacity	Hire	Buy	Page
✓	✓	✓	✓		✓	<50tph	✓	✓	6
✓	✓	✓	✓		✓	<100tph	✓	✓	8
✓	✓	✓	✓		✓	<125tph	✓	✓	10
✓	✓	✓		✓	✓	<200tph		✓	12
✓	✓	✓		✓	✓	<300tph		✓	14
✓	✓	✓	✓		✓	from <100tph using EK600 to <200tph using EK1200	✓	✓	16
✓	✓	✓	✓		✓	from <100tph using EK600 to <200tph using EK1200	✓	✓	18
				✓	✓	up to 50 tons/hr capacity	✓	✓	20
	✓			✓	✓	up to 90 tons/hr capacity		✓	22
			✓			<500tph	✓		24
	✓			✓	✓	15m ³ bulk capacity	✓	✓	26

Easikit™ 450

Hire ✓

Purchase ✓

The Easikit™ 450 is a simple and compact modular system with a large capacity, which is perfect for low volume material handling. It has a robust and compact design making it the perfect solution when space is limited and throughput do not warrant a larger conveyor.





SPECIFICATIONS	
Power supply	100V, 415V or 240V
Type of material	Loose material such as animal feed, grain, biomass
Loading method	By hand, Small machine, Other conveyor
Mobile or static	Static
Length	Up to 20m
Weight	Variable 50kg/m
Belt width	450mm
Belt speed	0.3m/s, 0.7m/s, 0.9m/s + 1.2m/s
Maximum throughput	50 tons p/h
Hopper size (if used)	630 x 800mm
Max. incline angle	45°

SECTIONS	L (mm)	W (mm)	H (mm)	Kg
Head Unit (no motor)	960	960	310	53
Base tension unit	1190	1190	310	72
1m section	1050	1050	310	35
2m section	2050	2050	310	65



EASIWHEEL

The Easiwheel is a versatile, wheeled undercarriage specially designed for the EK450 conveyor, it clips onto the underside of the conveyor and can be mounted in any position along its length.

It makes it an ideal unit with its large pneumatic tyres for manoeuvring over uneven ground and making it easier to clear areas that are tight for space or to save on manual handling or back restraints.



Easikit™ 600

Hire ✓

Purchase ✓

The Easikit™ 600 will efficiently transfer materials from bays and across yards to other storage areas, or awaiting vehicles due to its considerable capacity and ease of loading from other machinery.



SPECIFICATIONS			
Power supply	415v or 240v	Belt width	600mm
Type of material	Loose material such as animal feed, grain, biomass	Belt speed	0.2m/s – 1.2 m/s
Loading method	By hand, Excavator, Small machine, Other conveyor	Maximum throughput	100 tons p/h
Mobile or static	Static	Hopper size (if used)	785 x 850mm or 940 x 940mm
Length	Up to 40m	Max. incline angle	35°
Weight	Variable 70kg/m		

SECTIONS	L (mm)	W (mm)	H (mm)	Kg
Head Unit (no motor)	1505	930	285	85
Head Unit (with motor)	1525	1015	300	120
Base tension unit	1545	730	285	93
1.2m section	1350	620	285	43
2.4m section	2550	625	285	85
Available lengths	2.86, 4.06, 6.46, 7.66, 8.86, 10.06, 11.26, 12.46, 13.66, 14.86, 16.06, 17.26, 18.46, 19.66, 20.86, 22.06, 23.26, 24.46, 25.66, 26.86			
Other	Plain, 15mm chevron, 50mm cleated belt	Fully galvanised		



CASE STUDY

Biomass: Dewatered Waste Processing (Bespoke Conveyor)



Coveya was approached by Cannington Enterprises Ltd, based in Somerset as they needed a bespoke conveyor system for taking around the clock, dewatered waste vegetation from their biomass process instead of offloading it from farm trailers.

Swang Farm has been operating for nearly 100 years and it wasn't until 1997 when the company changed direction and the farm operation was

separated from what was to become Cannington Cold Stores. Since then, they have diversified into sorting waste products such as fruit juice and now have their own biomass plant generating electricity for the farm and the grid.

With the help of the Coveya team, a design was produced which was later produced in 3D Solid works. The conveyor solution meant that they could divert the centrifuge waste to conveyors that would automatically convey from one to another and from one trailer to another, once each trailer had been filled.

The design was completed and manufactured at our Bristol site and the top half of the structure was pre-assembled to prove the concept and for our customer to see for themselves how it all goes together.

Easikit™ 900


Hire ✓

Purchase ✓

The modular Easikit™ 900 is designed to support high-volume loads. It can reach up to 40m on a single belt and with adjustable speeds of 0.2 – 1.2m/s, the Easikit™ 900 helps to significantly improve onsite productivity.

SPECIFICATIONS			
Power supply	415v or 240v	Belt width	900mm
Type of material	Loose material such as animal feed, grain, biomass	Belt speed	0.2m/s – 1.2 m/s
Loading method	By hand, Excavation, Other conveyor	Maximum throughput	125 tons p/h
Mobile or static	Static	Hopper size (if used)	940 x 1240mm
Length	Up to 40m	Max. incline angle	35°
Weight	Variable 80kg/m		



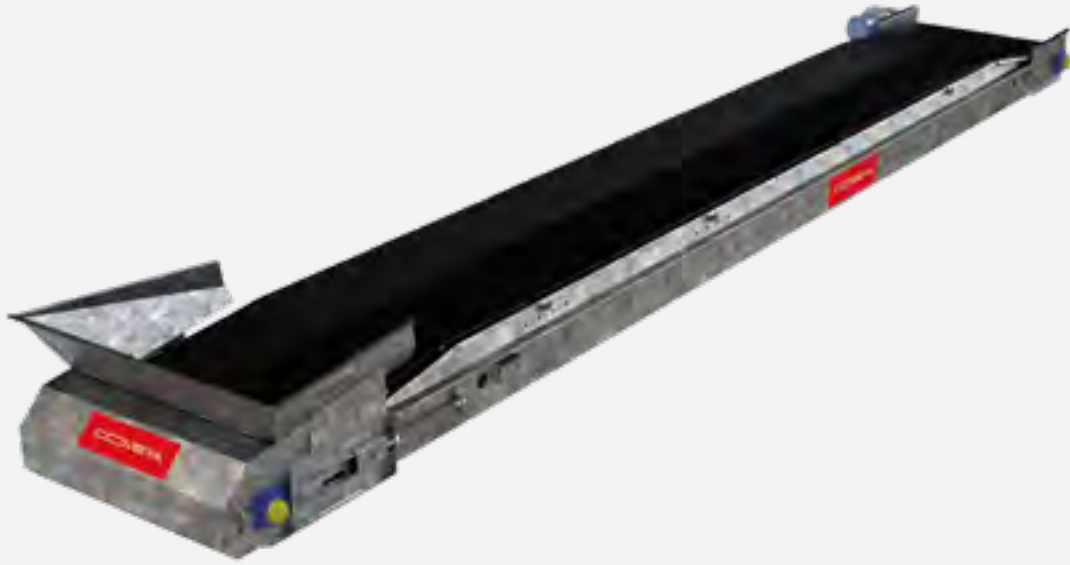

SECTIONS	L (mm)	W (mm)	H (mm)	Kg
Head Unit (no motor)	1500	1225	310	103
Head Unit (with motor)	1500	1315	310	138
Base tension unit	1500	1020	285	111
1.2m section	1350	925	285	52
2.4m section	2550	925	285	96
Available lengths	2.86, 4.06, 6.46, 7.66, 8.86, 10.06, 11.26, 12.46, 13.66, 14.86, 16.06, 17.26, 18.46, 19.66, 20.86, 22.06, 23.26, 24.46, 25.66, 26.86			
Other	Plain, 15mm chevron, 50mm cleated belt		Fully galvanised	

CASE STUDY

Greener Gardening Company

Greener Gardening Company found themselves with 40,000 pallets of compost that needed to be unloaded, debagged, and delivered up to a screener machine for processing. That's enough compost to fill 28 Olympic swimming pools!



Unfortunately, the pallets couldn't be dumped straight into the hopper: each plastic bag of compost had to be split open by hand to remove the compost from the plastic and then loaded into a hopper, by hand to avoid jams, delays and added expense.

Coveya visited the Operations Manager on-site and recommended an Easikit 900 conveyor to move the bags up and into the hopper. One end would be on the ground (for easy loading) and the other end of the conveyor would discharge up into the 3m high hopper.


With the belt running at a speed of about 1m/s, the team of two was able to shift over 550 bags per hour, completing 1,400 pallets in the first two weeks and over 40,000 pallets over the year. Once space had cleared, Greener Gardening Company hired a second Easikit 900 conveyor to double the throughput and complete the work more quickly.

Easikit™ 1200

Hire ✓

Purchase ✓

The Easikit™ 1200 has an extra wide 1200mm belt which optimises throughput safely. It's extremely robust and is ideal for fast, efficient bulk materials handling, making it popular for large volume applications, shifting up to 150 tons per hour.

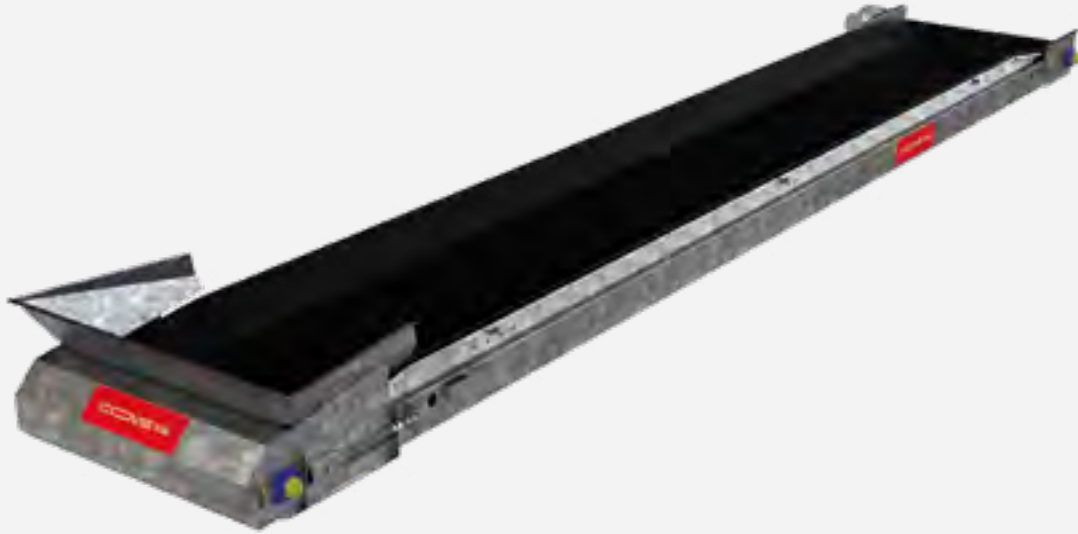

SPECIFICATIONS

Power supply	415V	Belt width	1200mm
Type of material	Bulk loose material such as animal feed, grain, biomass	Belt speed	0.2m/s – 1.2 m/s
Loading method	By hand, Excavator, Small machine, Other conveyor	Maximum throughput	150 tons p/h
Mobile or static	Static	Hopper size (if used)	940 x 1540mm
Length	Up to 40m	Max. incline angle	35°
Weight	Variable 80kg/m		

SECTIONS	L (mm)	W (mm)	H (mm)	Kg
Head Unit (no motor)	1500	1525	310	122
Head Unit (with motor)	1500	1615	310	157
Base tension unit	1500	1320	255	120
1.2m section	1245	1225	285	54
2.4m section	2445	1225	285	100
Available lengths	2.86, 4.06, 6.46, 7.66, 8.86, 10.06, 11.26, 12.46, 13.66, 14.86, 16.06, 17.26, 18.46, 19.66, 20.86, 22.06, 23.26, 24.46, 25.66, 26.86			
Other	Plain, 15mm chevron, 50mm cleated belt		Fully galvanised	



CASE STUDY

Heathrow Fruit Market

Coveya supplied an Easikit 1200 with a flighted belt that fed onto an Easikit 1200 picking line conveyor, which in-turn fed onto an Easikit 600 Radial conveyor so that the team could sort through the waste that came from the market. The conveyor configuration enabled the efficient sorting of piles of rubbish, segregating card and plastics from 'green' and food waste to avoid any waste then going onto landfill.




Easikit™ 1500

[Purchase ✓](#)

The extra wide, modular Easikit™ 1500 is designed for high-volume, low density material handling. It's simple to assemble, making it perfect for a range of applications and environments, enabling material to naturally spread across the conveyor for easy sorting and picking.

SPECIFICATIONS			
Power supply	415V	Belt width	1500mm
Type of material	Bulk loose material such as animal feed, grain, biomass	Belt speed	0.2 m/s – 1.2m/s
Loading method	By hand, Excavator, Small machine, Other conveyor	Maximum throughput	250 tons p/h
Mobile or static	Static	Hopper size (if used)	940 x 1935mm
Length	Up to 30m	Max. incline angle	35°
Weight	Variable 90kg/m		



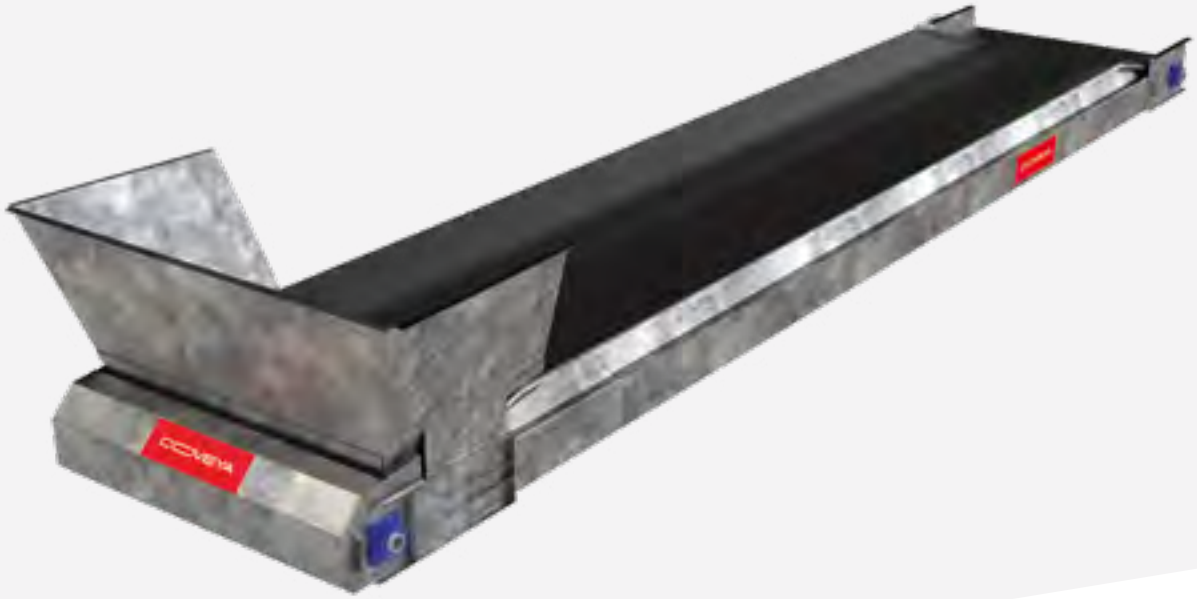

SECTIONS	L (mm)	W (mm)	H (mm)	Kg
Head Unit (no motor)	1500	1870	380	228
Head Unit (with motor)	1500	1960	380	279
Base tension unit	1500	1640	380	240
1.2m section	1350	1525	380	91
2.4m section	2550	1525	380	161
Available lengths	2.86, 4.06, 6.46, 7.66, 8.86, 10.06, 11.26, 12.46, 13.66, 14.86, 16.06, 17.26, 18.46, 19.66, 20.86, 22.06, 23.26, 24.46, 25.66, 26.86			
Other	Plain, 15mm chevron, 50mm cleated belt		Fully galvanised	

Easikit™ Mobile

Hire ✓

Purchase ✓

The Easikit™ Mobile 600, 900 & 1200 is the ideal solution for variable discharge heights. It's durable, weatherproof, easy to move around onsite and has a hydraulic ram to achieve inclines of up to 35 degrees.

SPECIFICATIONS			
Power supply	110V, 415V or hydraulic	Belt width	600mm, 900mm, 1200mm
Type of material	Aggregate, Recyclables, Sludge, Soil	Belt speed	0.2 m/s – 1.2 m/s
Loading method	By hand, Excavator, Small machine, Other conveyor	Maximum throughput	100 tons p/h
Mobile or static	Mobile	Hopper size (if used)	Small, Medium and Mega
Length	Up to 14.86m	Max. incline angle	35°
Weight	Variable 100kg/m		





Easikit™ Radial

Hire ✓


Purchase ✓

Built to order, the Easikit™ 600, 900 & 1200 Radial is ideal for projects where a combination of radial slewing movements and variable discharge positions are needed. With its fixed feed point and powered radial wheels, this model rotates through a full 360-degree arc and is supplied with a hydraulic ram and hand pump for easy height adjustment.



SPECIFICATIONS			
Power supply	415V	Belt width	600mm, 900mm, 1200mm
Type of material	Bulk loose material such as animal feed, grain, biomass	Belt speed	0.2 m/s – 1.2 m/s
Loading method	By hand, Excavator, Small machine, Other conveyor	Maximum throughput	25 tons p/h – 100 tons p/h
Mobile or static	Mobile	Hopper size (if used)	Small, Medium and Rounded
Length	Up to 12.46m	Max. incline angle	30°
Weight	1000kg		





**WE OFFER FREE EXPERT
ADVICE AND SUPPORT**

making sure you find the right
conveyor for your specific needs



Screw Conveyor

Hire ✓

Purchase ✓

This new addition to our conveyor range will efficiently process dry waste and it is available either as a static unit for purchase/hire or a mobile conveyor for hire only.

KEY FEATURES

The Screw Conveyor is a fully contained and sealed unit with no spillages


Modular stainless steel construction, built up in sections

It can be easily interfaced

210, 285, 315, 360, 480 & 580mm dia. centreless screw sizes available

Four different pitch centreless spirals available



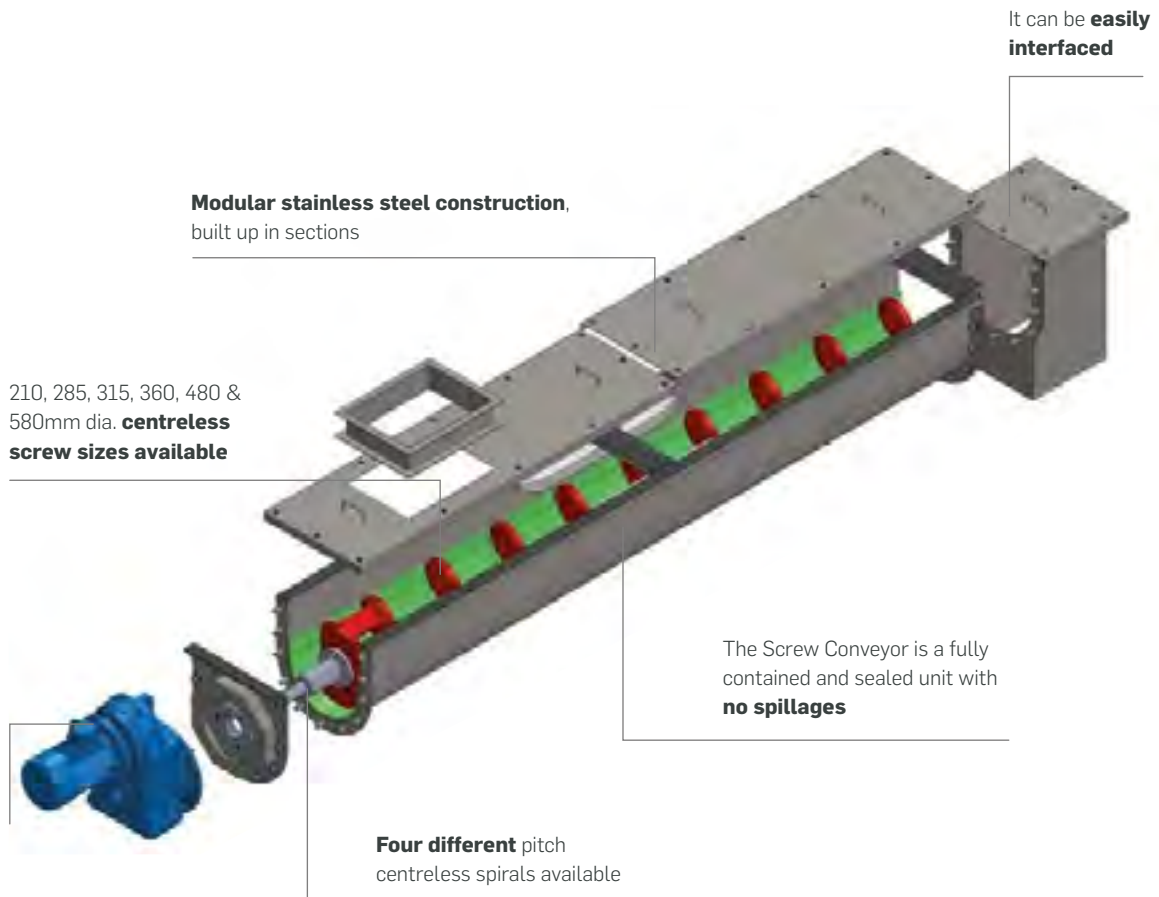

Telescopic Veya

Hire ✓

Purchase ✓

This conveyor is designed for efficient loading into either a store or bulker lorries. It is 900mm wide, offering a high output and it has a tilting discharge head which is achieved by using soft rubber belts with 25mm cleats. The automatic slewing platform enables crops to be evenly distributed across the width of a storage area and the variable speed drive offers the maximum control over the placement of crops into a store or bulker.

SPECIFICATIONS

Belt width	900mm	Circular hopper height	1200mm
Belt speed	Variable from 18-94m per min	Safedown pivot	49°
Cleat height	25mm	Overall transport width	2.5m





HEIGHT & REACH

	Extended	Retracted
Overall length (less drawbar)	14.1m	9.1m
Height under belt Maximum - Head raised	6.6m	4.65m
Height under belt Head lowered	1.1m	0.45m
Reach from axle centre Fully raised	8.6m	4.27m
Fully lowered	9.9m	5.5m
Reach at 25°	9.2m	5.1m
Maximum slew	15.35m	10.7m

HC1000 Monstaveya™

Hire ✓

Purchase ✓

Precision-engineered for heavy-duty materials movement, the HC1000 Monstaveya™ is our most powerful conveyor solution. Designed to handle virtually all types of material safely and easily, this high-capacity unit provides exceptional throughput and durability, ideal for even the most challenging projects. It's capable of loading an 8-wheeler in just 6 minutes and this hardwearing conveyor helps to minimise downtime, reduce fuel, maintenance and labour costs from day one.





SPECIFICATIONS	
Power supply	415V
Type of material	High volume, bulk loose material such as animal feed, grain, biomass
Loading method	Excavator, Large machine
Mobile or static	Static
Length	6m – 16m in 2 – 3m increments
Weight	3500kg
Belt width	1000mm
Belt speed	1.2m/s
Maximum throughput	500 tons p/h
Hopper size (if used)	1100 x 1800
Max. incline angle	30°



CASE STUDY

Coastal Recycling

Coastal Recycling had a bulk feed hopper that was rusty and beyond repair so they needed a system that would efficiently feed their existing trommel with green waste material which was then being recycled into compost. Coveya supplied a new bulk feed hopper an 16m HC1000 Monstaveya conveyor with an external drive and a magnetic head drum so that ferrous metals in the materials could be removed. Coastal Recycling was delighted with the solution.



Bulk Feed Hopper FH510

Hire ✓

Purchase ✓

Our Bulk Feeder Hopper is designed to provide a controlled flow of material onto our conveyors, allowing operators to load systems efficiently with a wheeled loader or excavator. It provides a buffer of material to ensure continuous loading with a speed-adjustable belt.

SPECIFICATIONS

Industry	Biomass, agriculture & composting	Bulk capacity	15m ³
Power supply	415v Drive	Length	5m
Legs	Adjustable height	Width	2m
Discharge height	1m – 1.5m	Height	3.5m
Belt speed	Variable	Weight	5500kg
Discharge gate	Adjustable		





Easikit™ Extras | Electrical Buy ✓



Emergency Stop Grab Wires

Can be mounted on either side of the conveyor to provide a continuous emergency stop system for the full length of the conveyor. Supplied complete with eye bolts – a legal requirement for conveyors over 5m in length and accessible.

PRICE CODE	
Up to 10m	630



Motor Starter

Direct-on-line starter in durable enclosure incorporating thermal overload for motor protection. Sealed to IP65. Supplied loose.

PRICE CODE	
1.5kW	633
3kW	634
4kW	635



Variable Speed Controller

This environmentally friendly controller will reduce your running costs and its soft start will reduce wear, giving longer life to moving parts. Supplied loose. Provides a variable belt speed to suit your application. Totally enclosed and sealed to IP65.

PRICE CODE	
	637



Motion Sensor

The motion sensor is supplied loose and should be wired to a control panel to indicate belt movement. This should be attached to the tail drum.

PRICE CODE	
	638

Easikit™ Extras | Belt Scrapers Buy ✓



Primary Belt Scraper

A cost-effective way to help prevent material carryback on the return belt when conveying viscous material. Suitable for plain belt and clipped or vulcanised joints, the primary scraper has a manually adjustable polyurethane blade and is mounted on the drive drum bearing for easy fitting.

	PRICE CODE	
	STANDARD	SNUB
Easikit™ 450	440	N/A
Easikit™ 600	640	642
Easikit™ 900	940	942
Easikit™ 1200	1240	1242
Easikit™ 1500	1542	N/A



Secondary Belt Scraper

Assists the primary scraper in helping to prevent material carryback on the return belt. Suitable for plain belt and clipped or vulcanised joints, the secondary scraper is mounted behind the primary scraper and shares the same bracket as the primary scraper mounted onto the drive drum bearing. The scraper has a manually adjustable polyurethane blade which provides a good back up when fitted with the primary scraper, especially when handling sticky material i.e. sewage cake.

	PRICE CODE	
	STANDARD	SNUB
Easikit™ 450	441	N/A
Easikit™ 600	641	643
Easikit™ 900	941	943
Easikit™ 1200	1241	1243
Easikit™ 1500	1543	N/A

Easikit™ Extras | Belt Scrapers Buy ✓



Self-Adjusting Belt Scraper

This is the perfect solution for keeping your belt clean when access to the drive drum is difficult and you want peace of mind that your belt will be kept clean without the need to manually adjust the scraper blade. Ideal for conveyors in locations where low maintenance is required.

	PRICE CODE
Easikit™ 450	450SA
Easikit™ 600	600SA
Easikit™ 900	900SA
Easikit™ 1200	1200SA
Easikit™ 1500	1500SA



Finger Belt Scraper

These are the ultimate option for keeping your belt clean. The heavy duty finger scrapers are suitable for cleaning chevron belt or plain belt if required. The scrapers come supplied complete with a heavy duty mounting frame.

There are 2 types of scraper available:

A. FLAT BELT SCRAPER

5 finger blade with carbide inserts for use on all materials.

B. CHEVRON BELT SCRAPER

7 finger blade with stainless steel inserts. For chevron belts transporting glass, clay and other hard-to-remove materials.

	PRICE CODE	
	A	B
Easikit™ 450	444A	444B
Easikit™ 600	644A	644B
Easikit™ 900	944A	944B
Easikit™ 1200	1244A	1244B
Easikit™ 1500	1544A	1544B

Easikit™ Extras | Covers Buy ✓



Side Guide Top Covers

These Top Covers are designed to fit on top of our standard Side Guides. Provides the solution when both a continuous rubber skirt on the belt and an easily removable cover for maintenance is required. Also makes an ideal cover when larger bulky items are being moved that will not fit under our standard Top Covers.

	PRICE CODE
Easikit™ 450	450SG
Easikit™ 600	650SG
Easikit™ 900	950SG
Easikit™ 1200	1250SG
Easikit™ 1500	1550SG



Bottom Covers

Provided to enclose the running length of the conveyor with mesh panels, supplied in 1m (EK450) or 1.2m long sections and secured with nut and bolt fixings, they are supplied as an extra when needed for health and safety. They are a legal requirement when using cleated or chevron belt.

	PRICE CODE
Easikit™ 450	451
Easikit™ 600	651
Easikit™ 900	951
Easikit™ 1200	1251
Easikit™ 1500	1551

Easikit™ Extras



Side Guides

Side Guides are used to control spillage of loose bulky material. Standard heights of 100mm and 300mm are available with continuous rubber side-skirts.

	PRICE CODE	
	100mm	300mm
Easikit™ 450	445	446
Easikit™ 600	645	646



Disc Return Rollers

Fitted with metal discs to help prevent material build-up on the roller itself. Recommended for use with sticky or difficult materials. Only suitable for use with plain or cleated belt.

	PRICE CODE
Easikit™ 600	655
Easikit™ 900	955
Easikit™ 1200	1255
Easikit™ 1500	1555


Note: Disc return rollers supplied as Easikit™ 1500



Auto Grease Units

This is a self contained unit designed to automatically lubricate the bearing over a period of one to twelve months. Once fitted and activated, it will work without attention until its allotted lifespan is over.

PRICE CODE	639
------------	-----

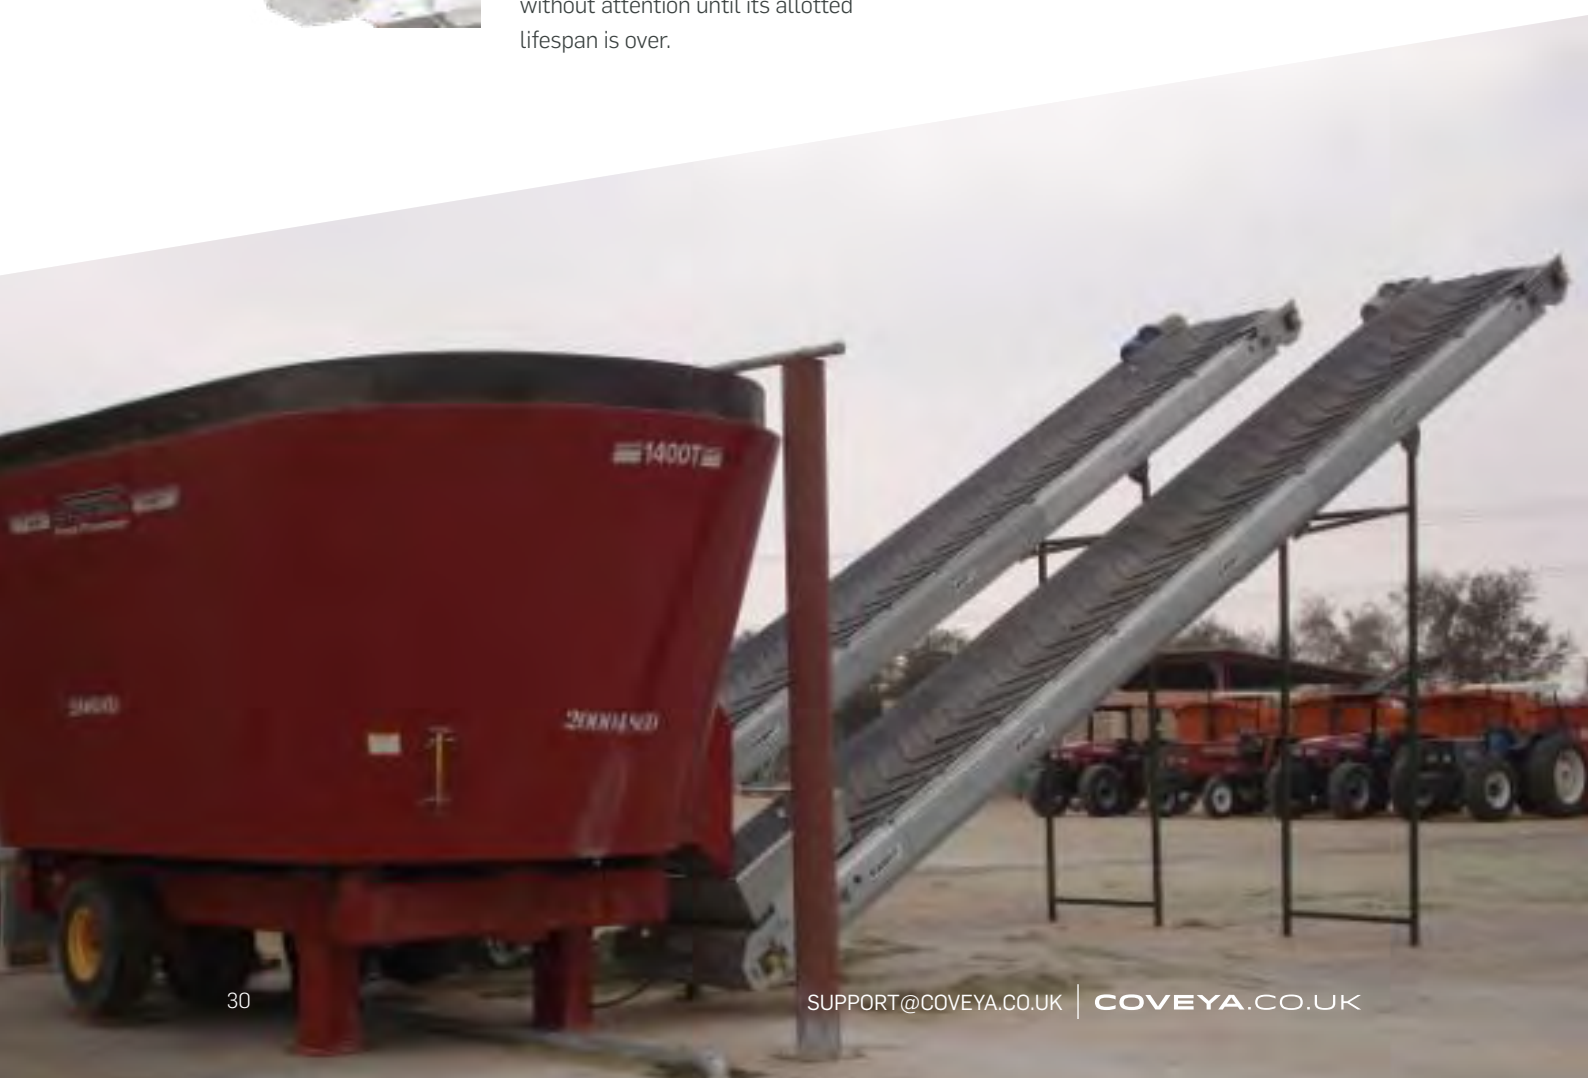


Support Stands & Stringers

Adjustable Support Stands

Our modular support system for EASIKIT™ Conveyors is a cost-effective, combined design. The stands utilise a modular design with cross-bracing for heights of up to 20ft or higher, depending on site conditions.

STAND	HEIGHT TO UNDERSIDE	EK450	EK600	EK900	EK1200
1	13.5"	251	261	271	241
2	27.5 – 47.25"	252	262	272	242
3	57 – 97.5"	253	263	273	243
4	104.25 – 145"	254	264	274	244
5	151.5 – 192"	255	265	275	245
6	199 – 239.25"	256	266	276	246

*Note: Pricing and availability for EK1500 support stands available on request.

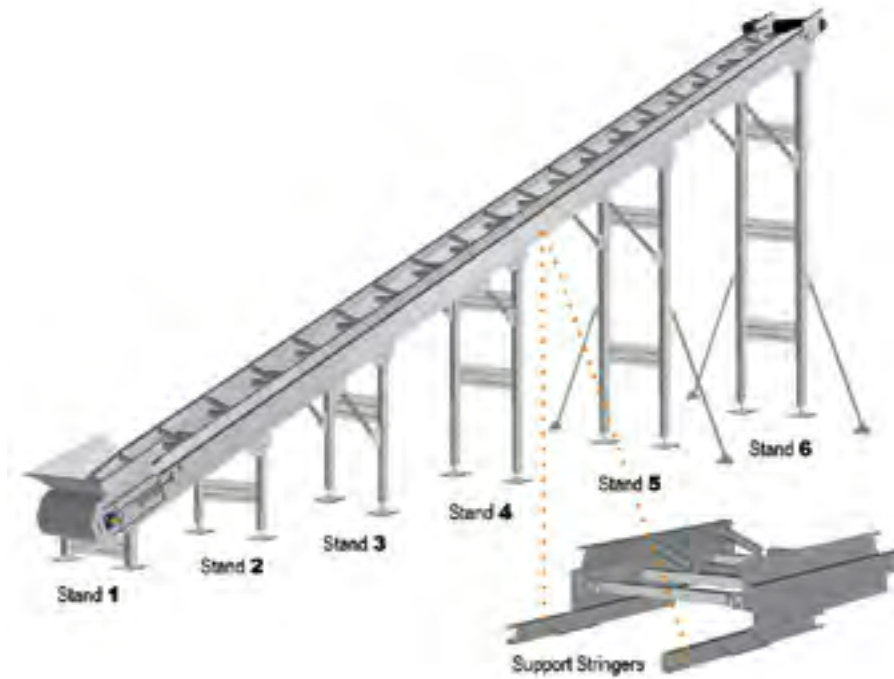

Support Stringers

Fitted to the underside of the conveyor frame in modular 4' (1.2m) and 8' (2.4m) lengths. Provides adequate support for spans of up to 20ft centres (depending on loading). Constructed from galvanized 'C' section, thus increasing conveyor frame height by 3" (75mm). This can also be used as a cable tray.

CONVEYOR LENGTH	9'	13'	17'	21'	25'	29'	33'
PART NO.	280	281	282	283	284	285	286
CONVEYOR LENGTH	37'	41'	45'	49'	53'	57'	61'
PART NO.	287	288	289	290	291	292	293
CONVEYOR LENGTH	65'	69'	73'	77'	81'	85'	
PART NO.	294	295	296	297	298	299	

About Coveya

Coveya is a market-leading manufacturer and supplier of a range of commercial and industrial conveyor systems, for purchase or hire, supporting customers globally.

With over 30 years' experience, our ongoing success stems from the quality of our products, including bespoke and modular conveyors, our commitment to exemplary customer service and our investment in the design and development of conveyors that support current and future customer needs.

We strive to deliver a complete materials handling solution; from free site visits and advice, to implementation, servicing and repair, and with a high percentage of repeat customers, the Coveya team always focus on adding value and delivering more.

Speak to a member of the Coveya team

T. 0800 915 9195
E. sales@coveya.co.uk

Visit our website

to download our corporate brochure, sector information and useful guides and instructions for our conveyor systems

coveya.co.uk



Gareth Herbert
Managing Director



Carsten Herbert
Sales Director




Barry Thompson
Customer Support




John Britnell
Business Development
Manager



Free on-site survey



You can either **rent or buy** a range of conveyors from us



Modular conveyors that **keep your site moving**




If you need a **bespoke conveyor**, we can help



A real commitment to **adding value and delivering more**




Our customer service is **second to none**



OUR VALUES

- C** – Confident, committed to customer service
- O** – Optimistic, genuine & honest
- N** – Nice, pleasant and decent
- V** – Visionary and innovative
- E** – Easy to do business with
- Y** – Years of experience, expertise and insight
- O** – Organised, neat and tidy
- R** – Responsive and fast



Unconditional Guarantee
If our temporary conveyor system fails to provide tangible efficiencies on your project, we will remove it and you will not be charged

OUR INTERNATIONAL DISTRIBUTORS

Coveya work with a number of international distributors that supply a range of our conveyors supported by servicing, maintenance and quality customer service.

To find out more, contact a member of the sales team on 0800 915 9195 or visit our website.

Australia

www.ch-s.com.au

Finland

www.vimelco.fi

Ireland

www.glendunplant.com

USA

www.interquip.net

New Zealand

www.nzconveyors.co.nz

TALK TO THE COVEYA TEAM TO FIND OUT MORE

Call 0800 915 9195 | sales@coveya.co.uk