


BARBICAN EXTRA®



Barbican Extra® security panels are identical to standard Barbican® panels, but with an important difference, the additional pales through the top rail that ensure even the smallest hand or foot cannot gain purchase making it virtually impossible to climb or scale.

- Posts can be customised for Barbed wire / Razor wire / Rota Spike®
- Vertical pale spacing conforms to building regulations for anti-trap
- Unique vandal-proof panel to post connectors
- Panels can be manufactured to accommodate sloping ground
- Anti-climb design
- 25-year service life guarantee



Post to panel fixings

APPLICATIONS


- ✓ Perimeters
- ✓ Company premises
- ✓ Commercial premises

PANELS

Barbican Extra® panels are up to 3000mm high and have two horizontal hollow sections rails 60 x 40mm (3 rails if 3000mm high). Vertical rectangular hollow section 25 x 25mm pales are passed through the rails with standard spacing at 129mm centres, with additional pales through top rail and between each full pale.

GATES

Matching gates available

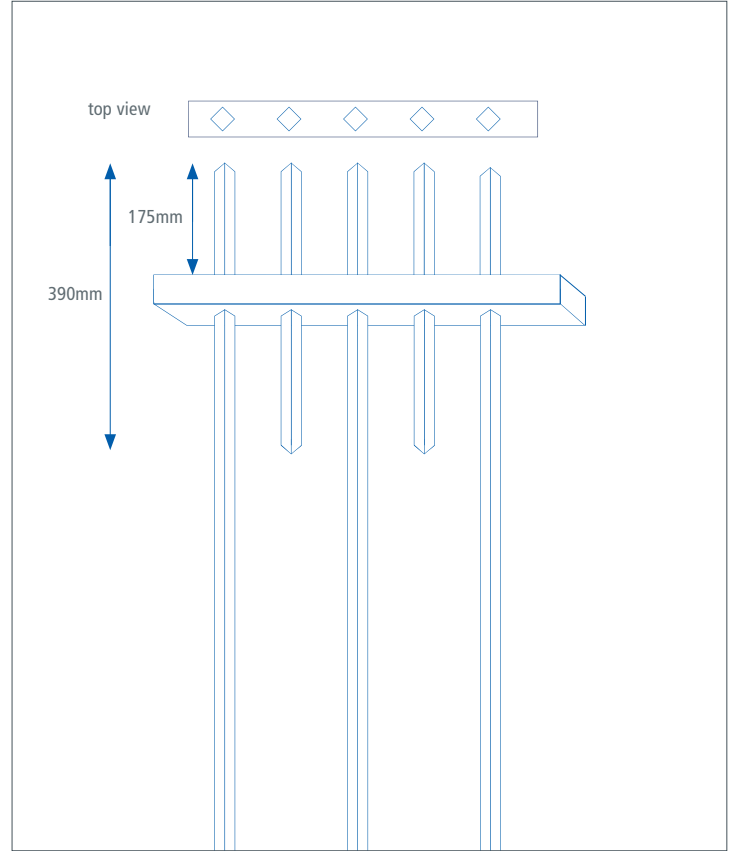

| HEIGHT (MM) | POST CENTRES (MM) | POST DIMENSIONS (MM) | OVERALL POST LENGTH (MM) |
|-------------|-------------------|----------------------|--------------------------|
| 2250 | 2484 | 80 x 60 | 3050 |
| 2500 | 2484 | 80 x 60 | 3300 |
| 3000 | 2484 | 80 x 60 | 3800 |

POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete
- Cranked to suit wall mounting

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request