




Fixed Post 900mm Above Ground 48mm-90mm Diameter Galvanised with Plastic Cap

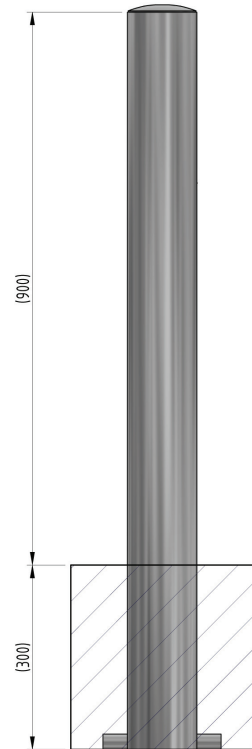

The Galvanised mild steel range of 900mm tall fixed posts are suitable for a range of applications. The round posts are available in 48mm, 60mm, 76mm and 90mm diameter tube.

The Fixed Post is available with extended legs for casting into concrete or a flange plate for bolting down and comes complete with a reflective Autopa logo.

Removable and colour coated versions also available.

<u>Part Number</u>	<u>Diameter and Fixing Detail</u>
138 100 531	48mm (Concrete In)
138 100 431	48mm (Bolt Down)
138 100 235	60mm (Concrete In)
138 100 231	60mm (Bolt Down)
138 100 801	76mm (Concrete In)
138 100 805	76mm (Bolt Down)
138 100 301	90mm (Concrete In)
138 100 321	90mm (Bolt Down)
138 100 994	M12 Expanding Bolt (3 required per post)
138 100 993	M12 Foundation Bolt (3 required per post)
138 100 995	M12 Rawl Bolt (3 required per post)

Product details

- 900mm tall
- Cast in posts 300mm below ground
- Colour coated options available extra
- Reflective bands available

Installation & use

Bolt down Plain Bollards require bolting down to a suitable concrete surface (no less than 400mm³).

48mm- 114mm three M12 bolts, 139mm - 219mm four M16 bolts.

Concrete In Fixed Posts are supplied with welded fixing spikes to ensure firm ground anchorage.

Concrete In Fixed Posts require an excavated hole (no less than 300mm deep) for installation.

This product is guaranteed for 12 months (if installed and used correctly).

www.autopa.co.uk
+44 (0)1788 550556



AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

