

Installation Instructions

Hula Installation Instructions




Installation procedure

- 1. Plan the final position of the play equipment ensuring that there is sufficient space*.
- 2. Excavate the foundation hole in accordance with the plan**.
- 3 Place the ground fixing in the foundation hole. Ensure that It is vertical and at the correct depth. Fill with required depth of Concrete
- 4. Allow conrete to set (2-3 Days) before fittind top section.
- 5. Follow the Maintenance Instructions provided.
- * Care should be taken during installation to decrease the hazard to children.
- ** Care should be taken if the conditions aren't normal.

Space requirements to EN1176

- 1 Area of safety surface 10.3M².
- 2. Perimeter of safety surface 11.7M.
- 3. HIC 0.5M

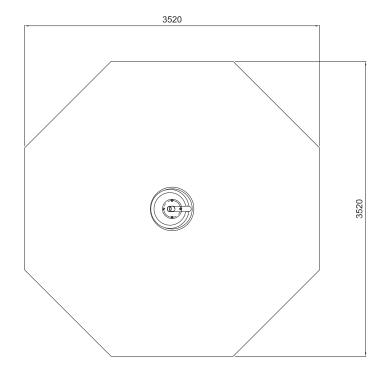


Required tools for installation

Tape measure Spirit level Digging equipment


Hula Installation Instructions



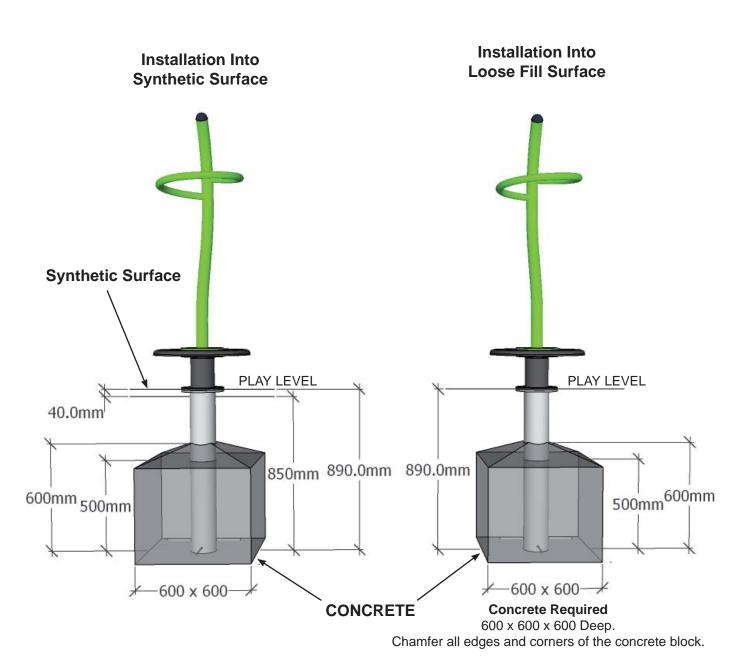

Hula Installation Instructions



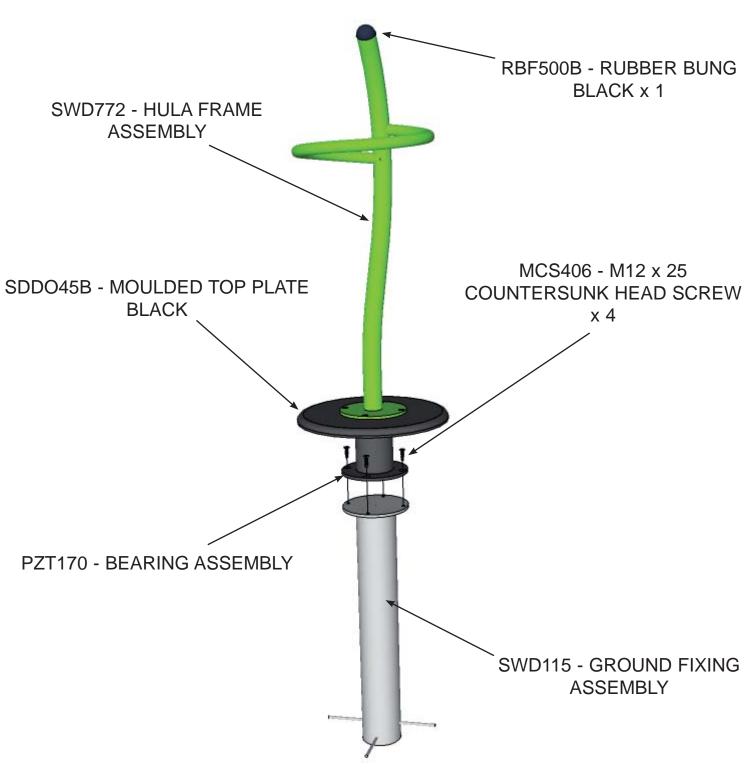

Hula Maintenance Instructions

NB: The warranty is invalidated if these instructions are not followed.



Recommended Regular Inspection and Maintenance	Interval Days 7 14 28 56 365				
Check stability of structure, tighten connections if required.				•	
Check parts at ground level for corrosion and/or rot. Replace any defective parts					
Check all painted elements for damage, rub down and repaint or replace as required.					
Check all ropework assemblies for wear and damage, replace if required.					
Check rotating pivot points for wear and smooth running lubricate or replace if required.					
Check rubber parts for wear and/or damage, replace if required.					
Check rubber safety surfaces for damage and poor performance, repair or replace if required.					
Check loose fill safety surfaces remove any foreign elements, repair or replace if required.					

Disposal Instructions

All components should be broken down into categories of:-

- 1 Mild Steel all 38mm Ø tube, step/ring climbers, welded bar, swing frames, deck frames, springie frames.
- 2 Stainless Steel all slides, mirror panels.
- 3 Aluminium all Playzone, Mission and Toddlerzone posts.
- 4 Galvanised Steel all chains and Teenzone posts.
- 5 Moulded Rubber Products without steel inserts all Mission and Toddlerzone Caps and edge details.
- 6 **Timber** all natural timber, plywood, and MDF panels.

Wherever possible these materials should be taken to specialist recycling organisations and recycled. In some cases where composite materials are used, then disposal at land fill sites is the only alternative such as:

- 7 Moulded Rubber Products encasing steel inserts all Swing Seats, Deck Tops, Duo/Dizzy Disc Tops.
- 8 High Pressure Laminate all Toddlerzone, Playzone, Minizone, Teenzone and Themed panels.
- 9 Steel Core Polypropylene Rope all Scramble Nets, Space Nets, Playzone/Toddlerzone/Mission Ropes.