

mayfair step flags



ISO 9001:2008

ISO 14001:2004

vibrant granite appearance

- Manufactured with sparkling natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Significantly reduced efflorescence
- Creates a striking, contemporary look


product specifications

Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Surface layer	Hard wearing surface layer with a minimum layer of 4mm and >390kgs/m ² cement
Granite content	Not less than 57% of granite aggregate in surface layer for Silver and Graphite; Not less than 46% of granite aggregate in surface layer for Sandstone.
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	> 3.5MPa
Slip/Skid resistance	Extremely Low (>75 USRV)
Installed to	BS 7533-4:2006
BS Plus	Q25 315
Applications	The product should be designed into projects using Building regulations 2000, Part M, Access to and use of buildings for guidance.
Energy used	100% renewable energy
Water used	100% water used from rainwater harvesting system
Carbon Footprint	<p><u>Edge Step</u></p> <p>40mm Silver: 16kgCo₂e/m² Sandstone: 17kgCo₂e/m² Graphite: 17kgCo₂e/m²</p> <p>50mm Silver: 19kgCo₂e/m² Sandstone: 22kgCo₂e/m² Graphite: 24kgCo₂e/m²</p> <p><u>Corner Step</u></p> <p>40mm Silver: 16kgCo₂e/m² Sandstone: 17kgCo₂e/m² Graphite: 17kgCo₂e/m²</p> <p>50mm Silver: 19kgCo₂e/m² Sandstone: 22kgCo₂e/m² Graphite: 24kgCo₂e/m²</p>
Recyclable	100% of this product can be recycled
Recycled Content	Not less than 20% of 40mm and 16% of 50mm recycled materials included (Silver/Graphite only)
Manufacturing location	Produced in the UK with locally sourced materials
breem rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved when used in conjunction with a prepared recycled sub-base.
Tobermore products are manufactured in accordance with an accredited ISO 9001:2008 quality system. Manufacturing facilities are accredited to ISO14001:2004 Environmental Management. The company publish Environmental labels and declarations in accordance with BS EN ISO 14021:2001.	

colours



step example

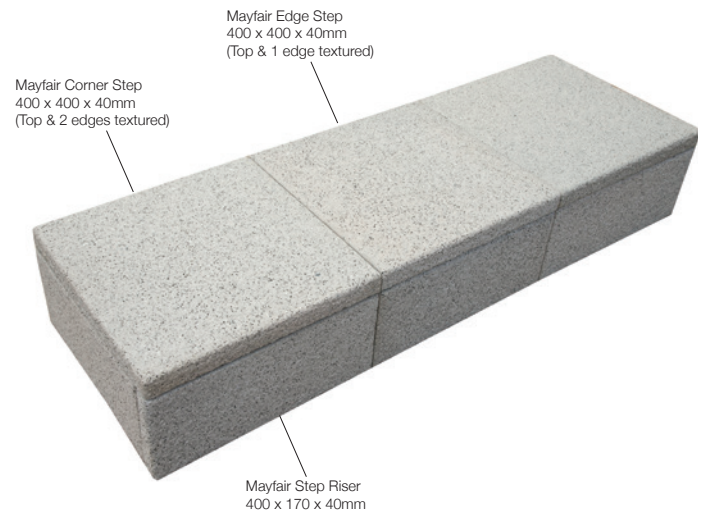

product	size (mm)	finish	edge	colours available	in stock	no. per m ²	no. per pack	weight (kg) per pack
MAYFAIR EDGE STEP*	600 x 400 x 50	GRANITE TEXTURED (top & 1 edge)	CHAMFERED	Graphite, Sandstone, Silver	YES	4.16	20	589
	400 x 400 x 40	GRANITE TEXTURED (top & 1 edge)	CHAMFERED	Graphite, Sandstone, Silver	YES	6.25	25	403
MAYFAIR CORNER STEP*	600 x 400 x 50	GRANITE TEXTURED (top & 2 edges)	CHAMFERED	Graphite, Sandstone, Silver	YES	4.16	20	589
	400 x 400 x 40	GRANITE TEXTURED (top & 2 edges)	CHAMFERED	Graphite, Sandstone, Silver	YES	6.25	25	403
MAYFAIR STEP RISER*	400 x 170 x 40	GRANITE TEXTURED	CHAMFERED	Silver	SPECIAL ORDER	-	25	195

*The colour of Mayfair Step Flags may slightly vary to the normal Mayfair Flag.

Refer to all instructions and warnings on our website