

Shannon

Versatile smooth paving.

Shannon's tight joints and chamfered edges make this product a popular choice for pedestrianised areas in addition to trafficked locations. Its smooth surface and range of vibrant long lasting colours allow for design flexibility.

- Vibrant long-lasting colours
- Superb hard-wearing smooth surface
- Pencil chamfer significantly reduces maintenance
- Smooth surface is ideal for use with trolleys, cases etc.

PrimeTop® **Ef-Stop®**



Finish



Also available as



Pedestrian
Use



Machine
Lay



BIM
Level 2

Refer to relevant guidance in BS 7533



208 x 173mm

Sizes



173 x 173mm



208 x 173mm

Duo Sizes

Both sizes in one pack



50mm

60mm

Depths



Shannon



Specification

 **PrimeTop®**  **Ef-Stop®**

Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement
Surface Finish	Smooth
Chamfer	Pencil Chamfer
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Typical tensile splitting strength of >3.6MPa
Slip/Skid risk	Extremely Low
Installed to	BS 7533-3:2005
BS	Plus Q24 110 Create 45-20-64/400
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
Carbon Footprint	50mm 18kgCo ² e/m ² 60mm 22kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved when used in conjunction with a prepared recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Shannon



Stock


product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Shannon 50mm	208 x 173 x 50	Bracken, Brindle, Charcoal, Heather, Natural, Slate	YES	14.04	2.34	27.79	390	1628	1628
Shannon Duo 50mm (both sizes in one pack) ML	208 x 173 x 50 173 x 173 x 50	Bracken, Charcoal, Heather, Slate	YES	13.86	0.99	30.3	210 210	1617	1607
Shannon 60mm	208 x 173 x 60	Bracken, Charcoal, Heather	YES	12.96	2.16	27.79	360	1792	1782

ML - This product can be hand or machine laid.


Heather




Bracken

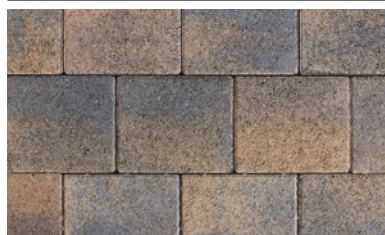


Brindle

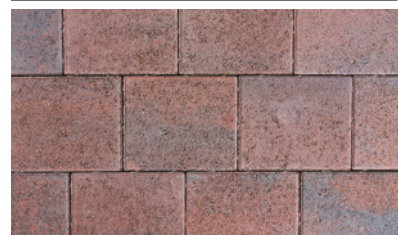

Slate

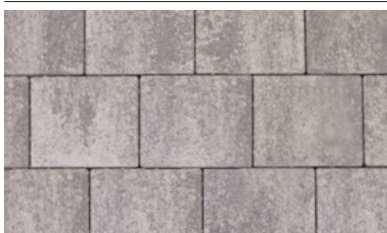

Natural

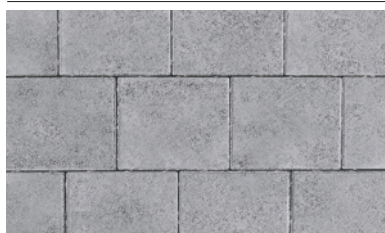

Charcoal



Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk