


SPECIFICATION, DESIGN & REDUCED DIG INSTALLATION GUIDANCE FOR GRASS AND GRAVEL SURFACES

The 'Reduced Dig' method of installation for BODPAVE 85 is suitable for pedestrian and light vehicle applications where firm ground conditions already exist. It is particularly advantageous where there are budgetary limitations, restrictions on excavation due to SSSI conservation and archeological issues or Tree Preservation Orders (TPO).

Bedding Layer
50mm thick layer of 4-15mm diameter, angular gravel or crushed aggregate.

Optional GeoGrid GX 2020T geogrid layer and GeoGrid TS1000 geotextile (See note 2)

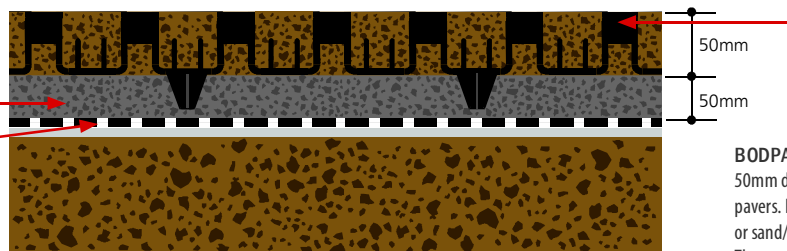

BODPAVE 85
50mm deep open-celled plastic pavers. Filled with 60:40 sand/soil or sand/compost rootzone blend. Then seeded and fertilised.
or
Filled with selected gravel/angular aggregate (4-15mm dia.).

Site Suitability

- Where existing ground conditions are firm (ie: CBR > 7%) and free draining or where a suitable hardcore/stone base already exists.
- Where trafficking is irregular or occasional
- Where loads will not exceed that of cars and light vans

Benefits of Reduced Dig

- Minimal site preparation or variation to existing levels
- Reduced installation time and costs
- Reduced import of materials and disposal of debris
- Rapid establishment and usage of site after installation
- Compliant with current guidance for Sustainable Urban Drainage Systems (SUDS)
- Suitable for grass or gravel surfaces

Applications

- Light vehicle parking and access routes
- Pedestrian access & Cycle routes
- Tree root protection
- Golf buggy paths and Tow paths
- Caravan and Leisure site access routes
- Wheelchair and disabled access (DDA compliant)
- Light aircraft parking and taxiways

Paving Grid Specification

DESCRIPTION	DATA
Product	BODPAVE 85
Material	100% recycled polyethylene
Colour	Black & Green
Paver dimensions Installed	500mm x 500mm x 50mm + 35mm ground spike 500mm
Paver size Nominal internal	x 500mm (4 grids per m ²)
cell size Structure Type	Castellated 67mm Plaque & 46mm Round Shaped Rigid-
Cell wall thickness	walled, flexible semi-closed cell combination 2.5mm –
Weight (Nominal)	4.4mm
Load bearing capacity (filled)	1.56 kg/paver - (6.24kg/m ²) <
Crush Resistance (unfilled) Basal	400 tonnes/m ²
support & Anti-Shear Open cell	< 250 tonnes
%	Integral 35mm long Cross & T section ground spikes (18 per paver) Top 92% /
Connection type	Base 75%
Interlock Mechanism	Overlapping Edge Loop & Cell connection
Chemical resistance UV	Integral self locking Snap-Fit Clips Excellent
resistance Toxicity	High
	Non Toxic

FOR GRASS AND GRAVEL SURFACES

Installation Methods

After confirming that the ground conditions are suitably firm and free-draining for this type of 'reduced dig' application, one of the following methods of installation should be followed.

A. For Grassed Surfaces

1. Cut the grass very close to the surface or where specified remove the turf/ topsoil to a depth of <100mm according to local levels. Dispose of all debris. Level the formation layer, lightly consolidate & install drains as specified.
2. Install edge retention as specified: Either tanalised timber boards, concrete, steel or plastic kerbs as appropriate.
3. Place a layer of GeoTrax GX 2020T geogrid on the formation layer and ensure it is flat to the surface by pinning as required. Note: An optional GeoTrax TS1000 geotextile can be placed onto the formation prior to the GeoTrax GX 2020T geogrid installation, to prevent migration/contamination (see Note 2).
4. Place a 50mm thick bedding layer of 4 - 15mm diameter angular gravel /aggregate evenly over the geogrid. The geogrid must not be allowed to become exposed above the gravel/aggregate layer.
5. With the 2 sets of edge loop connectors facing in directions of laying, place the BODPAVE 85 firmly onto the screeded bedding layer so that the ground spikes are pressed fully into the bedding and the base of the paver cells sit flat on the surface. Connect adjacent pavers together by slotting the edge cell connectors down into the edge loops (LOOPS ALWAYS LEAD). Pavers are locked in place by the integral snap-fit clips. Progress over the area in rows. Use protective gloves to avoid abrasions.
6. Pavers can be offset by 1 cell increments or cut to fit around obstructions & curves using a hand or power saw. The use of cut-pieces which do not have integral snap-fit connectors should be avoided wherever possible.
7. Fill pavers with the specified propriety rootzone to finished levels of 5-7mm below the top of the cells after settlement. A light vibrating plate compactor may be used to consolidate the pavers and settle rootzone fill. Do not overfill the cells. Additional settlement of the rootzone may occur where an open graded bedding is used, & further topping-up may be required.
8. Rootzone fill must be a free-draining, structurally sound propriety blend of sand:soil or sand:compost such as used in sports/golf construction & normally identified as a 60:40 or 70:30 ratio blend. The use of site-won materials or in-situ self-blending is NOT recommended without taking further advice.
9. Carry out a normal seeding, fertilising & watering programme. A very light top dressing may be applied to just cover the seed and to provide adequate germination conditions. Do not overfill the paver cells. Thin-cut or Washed Turf may be rolled into the surface as an alternative if required.
10. The surface may be trafficked immediately, but it is preferable to allow grass to fully establish prior to use.

B. For retained Gravel Surfaces

After confirming that the ground conditions are suitably firm and free-draining for this type of 'reduced dig' application, the following method of installation should be followed.

1. Follow steps 1-6 above. Note: An optional geotextile fabric layer GeoTrax TS1000 geotextile can be placed onto the formation prior to the GeoTrax GX 2020T geogrid installation (Step 3), to prevent migration/contamination (see Note 2).
2. Fill the pavers with the specified angular gravel or aggregate. Preferably a clean, evenly graded angular material with a range of 4 - 15mm diameter. Rounded 'pea gravel' is not recommended.
3. Consolidate the surface using a light vibrating plate compactor if required.
4. Refill any localised low areas with aggregate and repeat consolidation until satisfied with final compacted finish.
5. The surface can be trafficked immediately.


Note 1: Determination of requirement for placement of an imported sub-base for the application and the required thickness of that sub-base material shall be determined by the strength and condition of the existing soils, the extent of allowable excavation and in consideration of the proposed traffic loadings. Certain ground conditions may require placement of a drainage system within the design.

Note 2: Specific site criteria will determine if GeoTrax GX 2020T geogrid &/or GeoTrax TS1000 geotextile are required.

Typical profile

BODPAVE 85

with Grass or Gravel

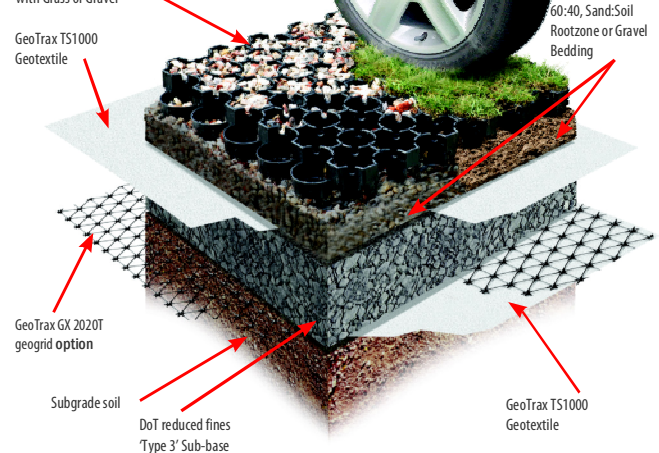

Not all layers will apply to every application and drainage may be required. Please refer to design guidance documents.

Note 3: Maximum advised gradient for traffic applications: 12% (1:8) 7°. BODPAVE 85 has specific pegging points if required for steep slope applications. Pegging is not necessary for standard access route applications.

Note 4: BODPAVE 85 complies with BS8300:2009 - "Design of buildings and their approaches to meet the needs of disabled people" - Code of Practice. (ISBN 978 0 580 57419) & Building Regulations Document 'M' section 6.

Specific advice on the use of BODPAVE 85 on steep slopes, drainage suitability and Sustainable Urban Drainage Systems (SuDS) applications, can be obtained from Terram.

The information contained herein is, to the best of our knowledge, accurate in all material respects. However, since the circumstances and conditions in which such information and the products mentioned herein can be used may vary and are beyond our control, no representation or warranty, express or implied, of any nature whatsoever is or will be made and no responsibility or liability is or will be accepted by us, any of our affiliates or our or their respective directors, officers, employees or agents in relation to the accuracy or completeness or use of the information contained herein or of any such products and any such liability is hereby expressly excluded to the maximum extent permitted by law.



For more information, contact us today or visit our website:

www.groundtrax.com

GROUNDTRAX
Ground Protection and Reinforcement
Telephone: 03456 800008 | Fax: 03456 800208
E-Mail: info@groundtrax.com | Website: www.groundtrax.com