

Play value

The small village of timber houses provides a friendly atmosphere in the play area. The different play levels stimulate house and cave games while the wide platform is a meeting point for neighbourhood contacts. The steps are good for sitting and talking. Naturally the active children use the house combination for running about, chasing and climbing.



Order No. L4.10700 made of larch



Order No. 4.10701 impregnated with steel feet


Fundamental characteristics

- child proportions according to ergonomic requirements
- agreeably designed ensemble for role games
- appealing design by: arrangement of the houses, sheltering roofs, alteration on materials: claddings/ square timber
- natural wooden surface which appeals to the senses
- sturdy roof construction
- incentive for playing: furniture, stairs, ramps
- movement: crawling, hiding, climbing


Suitable

- for children from 3 years
- for public playgrounds
- playgrounds situated near houses
- nurseries
- children's homes
- therapy institutions for children
- school playgrounds
- leisure areas

House Group A



4.10700

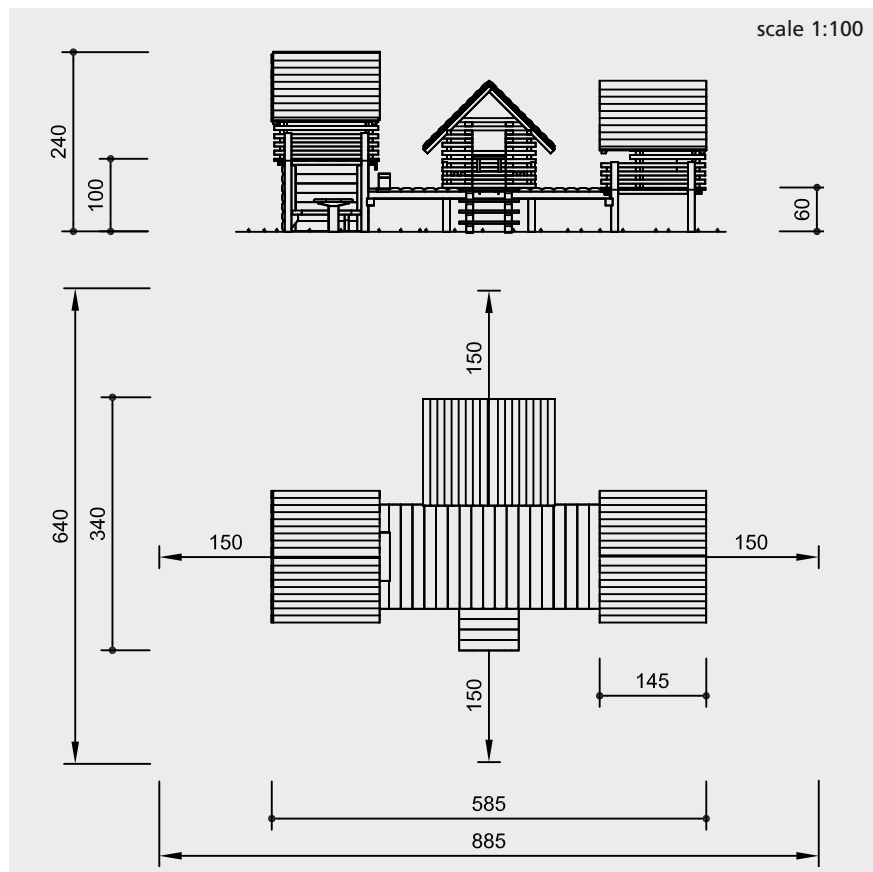

Safety check according to EN 1176

Components

- 3 timber houses on stilts
- 1 level room containing:
 - 2 walls with 2 benches,
 - 1 round table
- 1 bridge 1.40 x 3.00 m
- 1 stairs, height 0.60 m
- 1 step, height 0.20 m

Installation information

Surfacing requirements corresponding to a fall height of < 0.60 m (please refer to price list for more detailed information)

Foundations

Timber Houses
12 items 50 x 50 x 50 cm
excavation 70 cm

Stairs
1 item 30 x 70 x 20 cm
excavation 40 cm

Table
1 item 60 x 60 x 40 cm
excavation 60 cm

Attention:

Exact measurements may vary, for all installation dimensions refer to current installation instructions.

Technical changes reserved.

Equipment also available with steel feet.

Technical information

core-free

sawn-timbers of spruce/fir, boiler pressure impregnated according to DIN 68800, hazards class 4, core-free, by that formation of cracks can be reduced



claddings

thickness 3 - 4.5 cm, de-barked by hand, boiler pressure impregnated according to DIN 68800, hazards class 4



fittings

basic furnishings like a table and benches are built into the house and are a stimulus to role-play



floors of the houses of 25 mm tongue and groove boards

Bridge, stairs, table and benches of mountain larch, selected according to eight quality criteria

steps of stairs made of hardwood, 25 mm

Order No. 4.10700

impregnated version with double-layered roof of 21 mm boards and 3 - 4.5 cm thick claddings

Order No. L4.10700

version made of larch with single-layered roof of 3 - 4.5 cm thickness, half-rebated claddings and support posts made of oak heartwood

Dimensions

(small deviations possible)

Timber Houses

total height	2.40 m
height floor	1.00/0.60 m
width	1.75 m
depth	1.45 m

Bridge

length	3.00 m
width	1.40 m
height	0.60 m

Stairs

width	0.80 m
-------	--------

total weight approx.	1180 kg
----------------------	---------

For more detailed explanation of the quality characteristics see price list.



4.10700