



Play value

Slides are fun and sliding provides an exhilarating way to descend from a height. The exhilaration of the unfamiliar, apparently risky movement is an important play element of the slide. This downhill glide without doing anything other than overcoming self-doubt and being daring, is enjoyable and provides a sense of achievement. Particularly fun is tandem or twin gliding on a wide slide. This is also suited for therapy, where the patient can enjoy sliding with the carer.

Fundamental characteristics

- friendly appearance
- exclusive design
- can also be installed as embankment slides
- incentive for playing: experiencing height, thrill
- movement: sliding

Suitable

- for children from 3 years
- for public playgrounds
- leisure areas
- nurseries
- playgrounds situated near houses

Stainless Steel Slides
width 1.00 - 1.50 m




Note on installation

The orientation of the slide to the South has to be avoided because of heating up of the material.



3.63300 - 3.64250

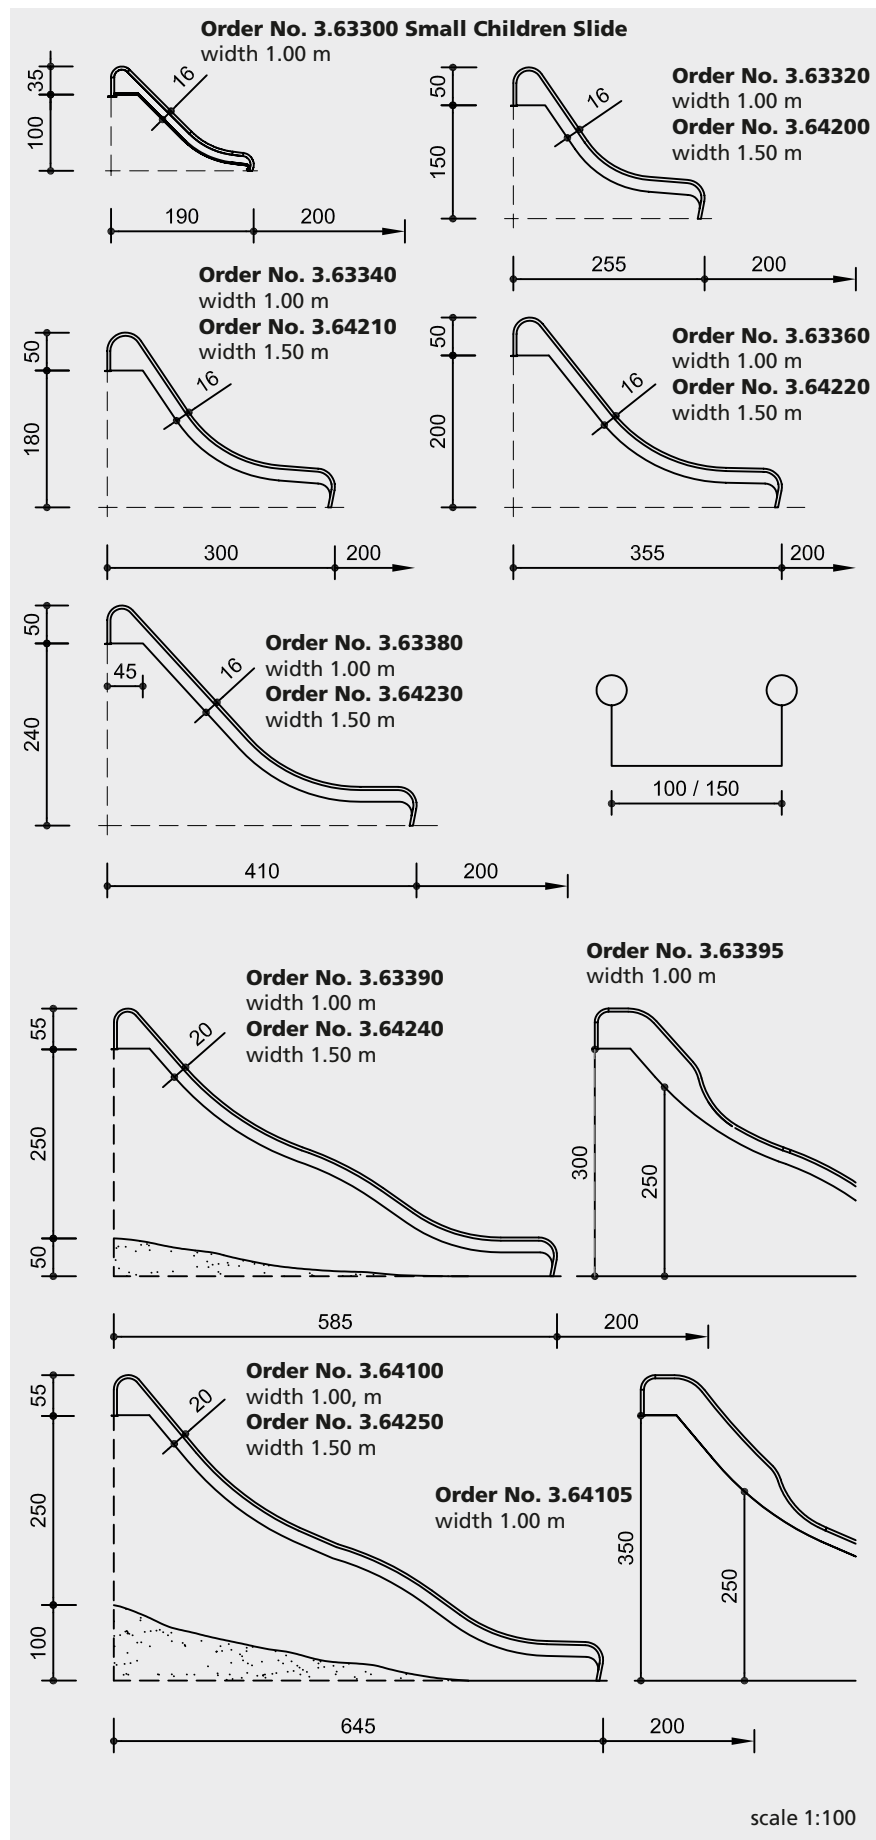

Materials

Total construction of the slides made of stainless steel; thickness of slide metal: for Order No. 3.63300 2.5 mm, for all other slides 3 mm, handrail tube Ø 42 mm, thickness 2mm

height of the sides 16 or 20 cm, **Order No. 3.63395** and **3.64105** with higher sides up to 2.50 m fall height

Dimensions see drawings (small deviations possible)

Order No.	weight
3.63300	65 kg
3.63320	110 kg
3.63340	130 kg
3.63360	150 kg
3.63380	170 kg
3.63390	250 kg
3.64100	265 kg
3.63395	265 kg
3.64105	275 kg
3.64200	150 kg
3.64210	175 kg
3.64220	200 kg
3.64230	225 kg
3.64240	320 kg
3.64250	335 kg

Components

Order No. 3.63300 Small Children Slide
1 Slide, width 1.00 m, with ground anchor and 2 upper fish-plates above

Order No. 3.63320 - 3.63380
1 Slide, width 1.00 m with 2 supporting posts below and 2 upper fish-plates above

Order No. 3.63390/3.64100
1 Slide, width 1.00 m, with 1 wave, with 2 supporting posts below and 2 upper fish-plates above

Order No. 3.63395/3.64105
1 Slide, as before, but with higher sides with 2 supporting posts below and

Order No. 3.64200 - 3.64230
1 Slide, width 1.50 m with 2 supporting posts below and 2 upper fish-plates above

Order No. 3.64240/3.64250
1 Slide, width 1.50 m, with 1 wave, with 2 supporting posts below and 2 upper fish-plates above

Installation information

Surfacing requirements depending on the fixing height, embankment slides depending on the topographic situation; in the run-out area we recommend material such as sand; (please refer to price list for more detailed information)

Foundations
Slides with ground anchor do not need concrete foundations; for Slides with supporting posts: 2 items 30 x 30 x 30 cm excavation 70 cm

Safety check according to EN 1176



3.63300 - 3.64250

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.